NOVEMBER · 1950

electronics

A McGRAW-HILL PUBLICATION

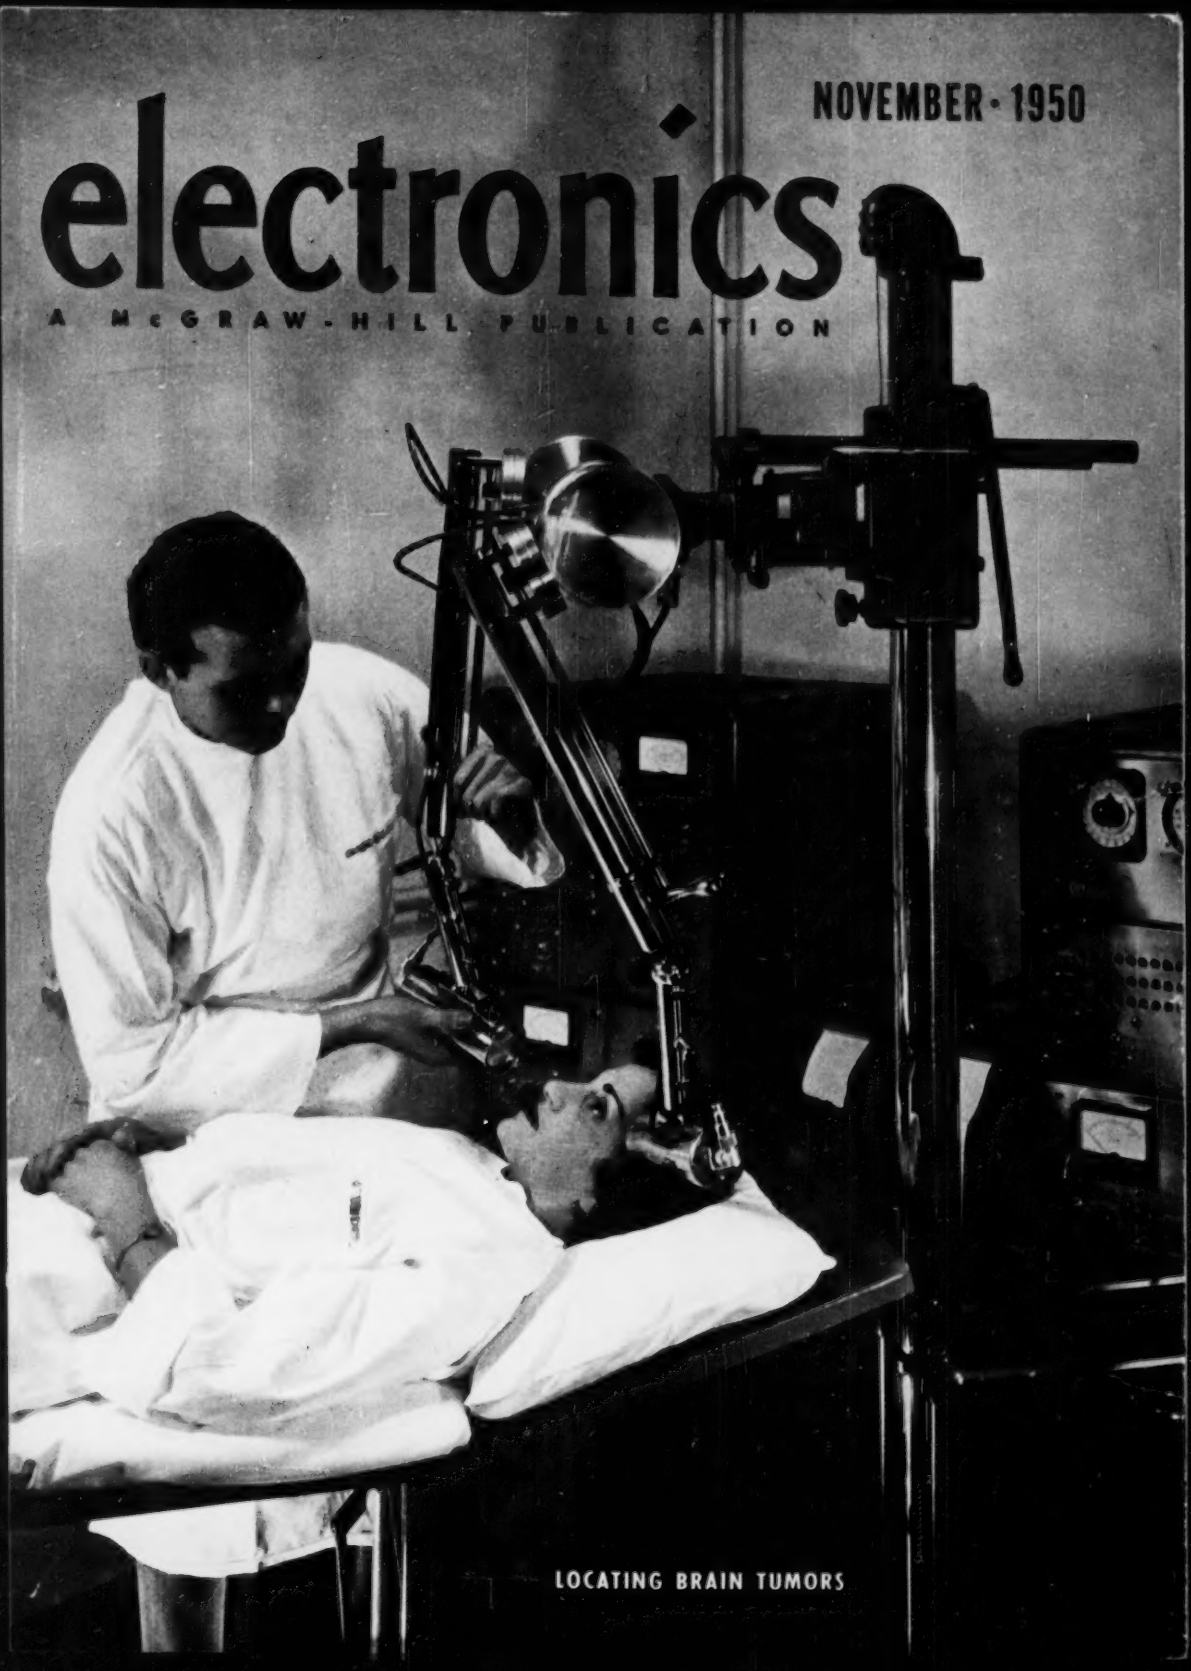

LOCATING BRAIN TUMORS

Linear Standard Units...

THE ULTIMATE IN QUALITY. . .

UTC Linear Standard Audio Transformers represent the closest approach to the ideal component from the standpoint of uniform frequency response, low wave form distortion, high efficiency, thorough shielding and utmost dependability.

UTC Linear Standard Transformers feature . . .

- **True Hum Balancing Coil Structure** . . . maximum neutralization of stray fields.
- **Balanced Variable Impedance Line** . . . permits highest fidelity on every tap of a universal unit . . . no line reflections or transverse coupling.
- **Reversible Mounting** . . . permits above chassis or sub-chassis wiring.
- **Alloy Shields** . . . maximum shielding from inductive pickup.
- **Hiperm-Alloy** . . . a stable, high permeability nickel-iron core material.
- **Semi-Toroidal Multiple Coil Structure** . . . minimum distributed capacity and leakage reactance.
- **Precision Winding** . . . accuracy of winding 1%, perfect balance of inductance and capacity; exact impedance reflection.
- **High Fidelity** . . . UTC Linear Standard Transformers are the *only* audio units with a guaranteed uniform response of ± 1 DB from 20-20,000 cycles.

TYPICAL LS LOW LEVEL TRANSFORMERS

Type No.	Application	Primary Impedance	Secondary Impedance	±1 db from	Max. Level	Relative hum-pickup reduction	Max. Unbalanced DC in prim'y	List Price
LS-19	Low impedance mike, pickup, or multiple line to grid	50, 125, 200, 250, 333, 500, 600 ohms	60,000 ohms in two sections	20-20,000	+15 DB	−74 DB	5 MA	$25.00
LS-19R	As Above	As above	50,000 ohms	20-20,000	+14 DB	−92 DB	5 MA	32.00
LS-12	Low impedance mike, pickup, or multiple line to push pull grids	50, 125, 200, 250, 333, 500, 600 ohms	120,000 ohms overall, in two sections	20-20,000	+15 DB	−74 DB	5 MA	28.00
LS-12R	As above	As above	80,000 ohms overall, in two sections	20-20,000	+14 DB	−92 DB	5 MA	35.00
LS-26	Bridging line to single or push pull grids	5,000 ohms	60,000 ohms in two sections	15-20,000	+20 DB	−74 DB	0 MA	25.00
LS-19	Single plate to push pull grids like 2A3, 6L6, 300A Split secondary	15,000 ohms	45,000 ohms 1.25:1 each side	20-20,000	+17 DB	−50 DB	9 MA	24.00
LS-21	Single plate to push pull grids. Split primary and secondary	15,000 ohms	135,000 ohms; half-ratio 2:1 overall	20-20,000	+14 DB	−74 DB	0 MA	24.00
LS-22	Push pull plates to push pull grids. Split primary and secondary	30,000 ohms plate to plate	40,000 ohms; turn ratio 1.6:1 overall	20-20,000	+26 DB	−50 DB	25 MA	31.00
LS-30	Mixing low impedance mike, pickup, or multiple line to multiple line	50, 125, 200, 250, 333, 500, 600 ohms	50, 125, 200, 250, 333, 500, 600 ohms	20-20,000	+17 DB	−74 DB	5 MA	25.00
LS-30R	As above	As above	As above	20-20,000	+15 DB	−92 DB	5 MA	32.00
LS-27	Single plate to multiple line	15,000 ohms	50, 125, 200, 250, 333, 500, 600 ohms	30-12,000 cycles	+20 DB	−74 DB	8 MA	24.00
LS-50	Single plate to multiple line	15,000 ohms	50, 125, 200, 250, 333, 500, 600 ohms	20-20,000	+17 DB	−74 DB	0 MA	24.00
LS-51	Push pull low level plates to multiple line	30,000 ohms plate to plate	50, 125, 200, 250, 333, 500, 600 ohms	20-20,000	+20 DB	−74 DB	1 MA	24.00
LS-141	Three sets of balanced windings for hybrid service. (unisolated)	500, 600 ohms	500, 600 ohms	30-12,000	+10 DB	−74 DB	0 MA	28.00

TYPICAL LS OUTPUT TRANSFORMERS

Type No.	Primary will match following typical tubes	Primary Impedance	Secondary Impedance	±1 db from	Max. Level	List Price
LS-52	Push pull 2A5, 250, 6V6, 42 or 2A5-A prime	8,000 ohms	500, 333, 250, 200, 125, 50, 30, 20, 15, 10, 7.5, 5, 2.5, 1.2	25-20,000	15 watts	$28.00
LS-53	Push pull 2A3's, 6A3G's, 300A's, 275A's, 6A3's, 6L6's	5,000 ohms plate to plate and 3,000 ohms plate to plate	500, 333, 250, 200, 125, 50, 30, 20, 15, 10, 7.5, 5, 2.5, 1.2	25-20,000	20 watts	28.00
LS-57	Same as above	5,000 ohms plate to plate and 3,000 ohms plate to plate	20, 20, 15, 10, 7.5, 5, 2.5, 1.2	25-20,000	20 watts	20.00
LS-58	Push pull parallel 2A3's, 6A3G's, 300A's, 6A3's	2,500 ohms plate to plate and 1,500 ohms plate to plate	500, 333, 250, 200, 125, 50, 30, 20, 15, 10, 7.5, 5, 2.5, 1.2	25-20,000	40 watts	50.00
LS-61	Push pull 6L6's self bias	4,000 ohms plate to plate	500, 333, 250, 200, 125, 50, 30, 20, 15, 10, 7.5, 5, 2.5, 1.2	25-20,000	20 watts	42.00

United Transformer Co.

150 VARICK STREET NEW YORK 13, N. Y.

EXPORT DIVISION 13 EAST 40th STREET, NEW YORK 16, N. Y. CABLES: "ARLAB"

electronics

A McGRAW - HILL PUBLICATION

NOVEMBER • 1950

LOCATING BRAIN TUMORS ..... COVER
Isotron, developed by the Nuclear Instrument and Chemical Corp., uses two Geiger counters to locate concentration of radioactive tracer in vicinity of brain tumor (see p 72)

DUAL STANDARDS FOR TELEVISION SCANNING 66
FCC proposal poses difficult technical questions. Possible answers are summarized

RADIATION COUNTERS AID BRAIN TUMOR DIAGNOSIS, by Richard G. Davis 72
Locate accumulation of radioactive material in vicinity of tumorous tissue

DESIGNING THE BRIDGEPORT UHF ANTENNA, by R. M. Scudder 76
Problem of obtaining high effective transmitter power at uhf is solved with high-gain omnidirectional antenna

COMPACT AMPLIFIER FOR AIRCRAFT TESTS, by John Foster and Taft Wrathall 81
Carrier amplifier with sensitivity of 8-μv input per ma output occupies 765 cu. in. complete with dynamotor

TIRE TREAD NOISE ANALYZER, by S. A. Lippmann and K. A. Ferguson 84
Photoelectric commutator ungates microphone circuit to select noise from one of many sample treads cut into tire

OVERTONE CRYSTAL OSCILLATOR DESIGN, by George H. Lister 88
Circuit permits direct operation on high-order overtones well above 100 mc with better stability than quartz crystal alone

32-CHANNEL HIGH-SPEED COMMUTATOR, by N. Alpert, J. Luongo and W. Wiener 94
All-electronic system provides sampling rates up to 1,000 cps

PRODUCTION EXPERIENCE WITH A 40-MC I-F RECEIVER, by D. W. Pugsley 98
How a 20-mc i-f receiver was redesigned to meet new standards

MICROWAVE SWEEP GENERATOR, by L. C. Eisaman 101
Motor-driven plunger sweeps klystron cavity from 2,600 to 3,400 mc

SHAPE RECORDING WITH RATIO-MODULATED TAPE, by Robert R. Perron 104
Memory for automatic machinery is accurate to 0.66 percent of radius in copying curves

QUENCH CONTROLLER FOR STEEL, by W. K. Halstead and L. D. Jaffe 109
Part plunged in water changes flux linkage between coils as it cools and actuates alarms

ELECTRICAL COLOR FILTERS, by V. Babits and H. Frank Hicks, Jr. 112
Varying electric and magnetic fields control color of transmitted light

GAIN-BANDWIDTH NOMOGRAPH (Reference Sheet), by Chester W. Young 116
Speeds calculations in designing single-tuned amplifiers and shows overall effect of varying any parameter

BUSINESS BRIEFS 60
CROSSTALK 65
TUBES AT WORK 120
ELECTRON ART 124
NEW PRODUCTS 128
NEWS OF THE INDUSTRY 132
NEW BOOKS 136
BACKTALK 136
INDEX TO ADVERTISERS ..... (Last Page)

DONALD G. FINK, *Editor*; **W. W. MacDONALD**, *Managing Editor*; John Markus, Vin Zeluff, A. A. McKenzie, *Associate Editors*; William P. O'Brien, James D. Fahnestock, *Assistant Editors*; John M. Carroll (on Military Leave), Ann Mastropolo, Marilyn Wood, *Editorial Assistants*; Gladys T. Montgomery, *Washington Editor*; Harry Phillips, *Art Director*; Eleanor Luke, *Art Assistant*

KEITH HENNEY, *Consulting Editor*

H. W. MATEER, *Publisher*; **WALLACE B. BLOOD**, *Manager*; R. S. Quint, *Buyers' Guide Manager*; D. H. Miller, James Girdwood, *New York*; Wm. S. Hodgkinson, *New England*; Warren W. Shew, *Philadelphia*; C. D. Wardner, *Chicago*; J. L. Phillips, *Cleveland*; J. W. Otterson, *San Francisco*; Carl W. Dysinger, *Los Angeles*; Ralph C. Maultsby, *Atlanta*; Bernard H. Butler, *London, England*

Contents Copyright 1950, by McGraw-Hill Publishing Company, Inc. All Rights Reserved. McGRAW-HILL PUBLISHING COMPANY, INCORPORATED. JAMES H. McGRAW (1860-1948), Founder • PUBLICATION OFFICE, 99-129 North Broadway, Albany 1, N. Y., U. S. A. EDITORIAL AND EXECUTIVE OFFICES, 330 West 42nd St., New York 18, N. Y., U. S. A.

Curtis W. McGraw, President; Willard T. Chevalier, Executive Vice-President; Joseph A. Gerardi, Vice-President and Treasurer; John J. Cooke, Secretary; Paul Montgomery, Senior Vice-President, Publications Division; Ralph B. Smith, Editorial Director; Nelson Bond, Vice-President and Director of Advertising; J. E. Blackburn, Jr., Vice-President and Director of Circulation; Dexter Keezer, Director of Economics Department; Russell F. Anderson, Editor, World News.

ELECTRONICS: November, 1950; Vol. 23; No. 11. Published monthly with an additional issue in June, price 75¢ a copy for U. S. and possessions, and Canada: $1.50 for Latin America; $2.00 for all other foreign countries. Buyers' Guide $2.00. Allow at least ten days for change of address. All communications about subscriptions should be addressed to the Director of Circulation. Subscription rates—United States and possessions, $6.00 a year, $9.00 for two years, $12.00 for three years. Canada (Canadian funds accepted), $10.00 a year, $16.00 for two years, $20.00 for three years. Latin American countries $15.00 for one year, $25.00 for two years, $30.00 for three years. All other countries $20.00 for one year, $30.00 for two years, $40.00 for three years. Please indicate position and company connection on all subscription orders. Entered as Second Class matter August 29, 1936, at Post Office, Albany, New York, under the act of March 3, 1879. BRANCH OFFICES: 520 North Michigan Avenue, Chicago 11, Ill.; 68 Post Street, San Francisco 4; Aldwych House, Aldwych, London, W.C. 2; Washington, D. C. 4; Philadelphia 3; Cleveland 15; Detroit 26; St. Louis 8; Boston 16; Atlanta 3, Ga.; 1111 Wilshire Blvd., Los Angeles 17; 738-9 Oliver Building, Pittsburgh 22. ELECTRONICS is indexed regularly in The Engineering Index.

Performance PROTECTION

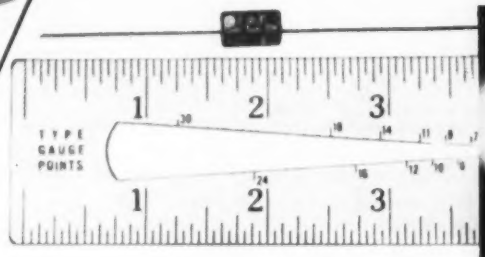



CM-15

Actual Size 9/32" x 1/2" x 3/16"
For Television, Radio and other Electronic Applications.
2 mmf. – 420 mmf. cap. at 500v DCw.
2 mmf. – 525 mmf. cap. at 300v DCw.
Temp. Co-efficient 50 parts per million per degree C for most capacity values.
6-dot Color Coded.

EL-MENCO CAPACITORS

Small, high-capacity fixed mica El-Menco capacitors are made to protect the performance of your products under severest operating conditions. They give long, dependable service because they must meet exacting conditions of Quality Test *before* they can be incorporated in your product. Tested at double their working voltage for dielectric strength, for insulation resistance and capacity value, El-Menco condensers can be depended upon for the utmost in performance protection.

SPECIFY EL-MENCO—

First Choice For Long Life and Dependability

THE ELECTRO MOTIVE MFG. CO., Inc.
WILLIMANTIC CONNECTICUT

Write on your firm letterhead for Catalog and Samples.

MOLDED MICA **El-Menco** MICA TRIMMER
CAPACITORS

FOREIGN RADIO AND ELECTRONIC MANUFACTURERS COMMUNICATE DIRECT WITH OUR EXPORT DEPT. AT WILLIMANTIC, CONN. FOR INFORMATION.
ARCO ELECTRONICS, INC. 103 Lafayette St., New York, N. Y.—Sole Agent for Jobbers and Distributors in U.S. and Canada

A STANDARD OF ZERO LOSS ANGLE

MUIRHEAD VARIABLE AIR CAPACITOR TYPE D-14

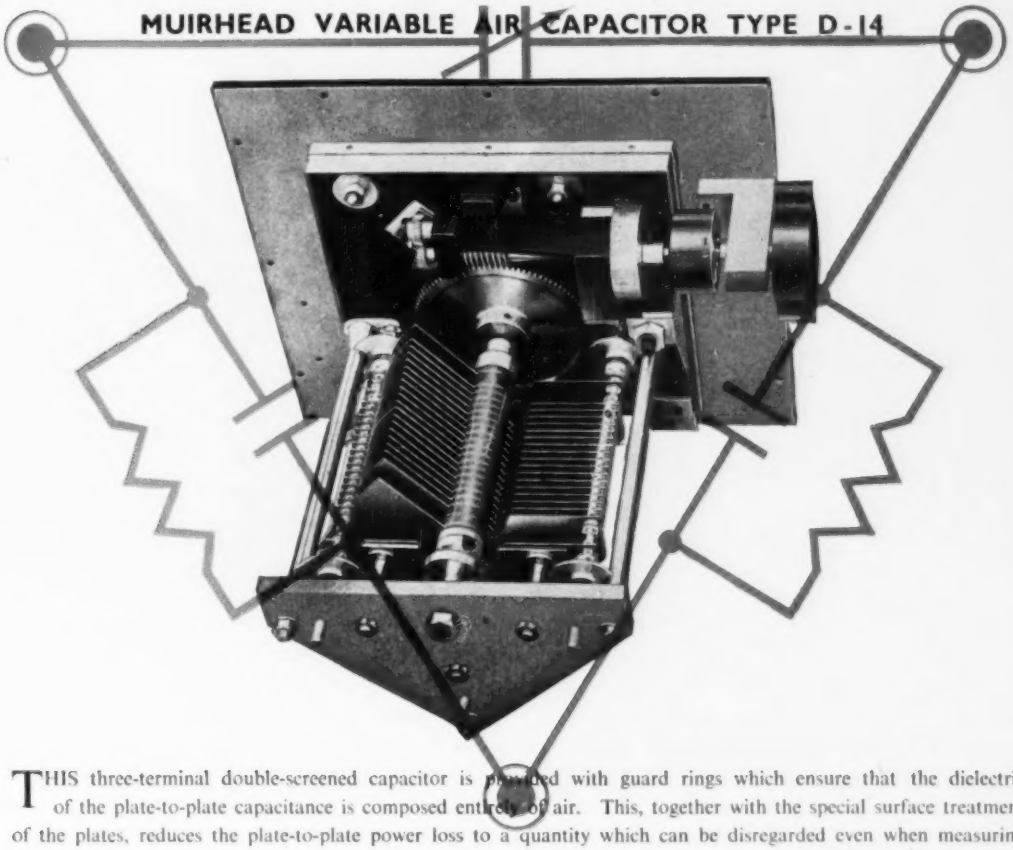

THIS three-terminal double-screened capacitor is provided with guard rings which ensure that the dielectric of the plate-to-plate capacitance is composed entirely of air. This, together with the special surface treatment of the plates, reduces the plate-to-plate power loss to a quantity which can be disregarded even when measuring the smallest power factors.

SPECIFICATION

CAPACITANCE: Type D-14-A: 1300$\mu\mu$F calibrated. Type D-14-B: 100$\mu\mu$F to 1000$\mu\mu$F direct reading.

LOSS ANGLE: Approx. 1 micro-radian in a dry atmosphere; 7 micro-radians at 75% relative humidity, for the frequency range 50c/s to 10,000c/s and any setting of the capacitor.

DRIVE: Worm reduction gear, 50:1 ratio.

SCALE: 5000 divisions. Subdivision to 1 part in 20,000 by interpolation.

BACKLASH: Not exceeding 1 part in 20,000.

DIMENSIONS: 12½" x 10" x 13⅜" (32·7 x 25·4 x 34·6cm.).

PRICE: Type D-14-A: $365. Type D-14-B: $390. Including packing and freight.

Write for further particulars

ORDER BY CABLE — PAY BY YOUR OWN DOLLAR CHECK

MUIRHEAD & Co. LTD.
PRECISION ELECTRICAL INSTRUMENT MAKERS
BECKENHAM · KENT · ENGLAND
Telegrams and Cables: MUIRHEADS ELMERS-END

PRECISION
MUIRHEAD
ELECTRICAL INSTRUMENTS

M.U.5

A complete line

for resistors too!

Unusual *combinations of characteristics* required in today's critical electronic circuits demand a complete range of resistor types. Specializing in resistors, IRC makes the widest line in the industry. This means ease of procurement—a single dependable source of supply for *all* your resistance needs. It also means unbiased recommendations—no substitution of units "just as good". IRC's complete line of products; complete research and testing facilities; complete network of licensees for emergency production—all add up to complete satisfaction for you.

CONTROLS



IRC Type W Wire Wound Controls are designed for long, dependable service and balanced performance in every characteristic. These 2-watt variable wire wound units provide maximum adaptability to most rheostat and potentiometer applications within their power rating. Catalog Bulletin A-2.

IRC New Type Q Controls feature small 1⅛" size, rugged construction and superior performance. Increased arc of rotation permits same resistance ratios successful in larger IRC Controls. Catalog Bulletin A-4.

PRECISION RESISTORS



IRC Precision Wire Wounds offer a fine balance of accuracy and dependability for close-tolerance applications. Extensively used by leading instrument makers, they excel in every significant characteristic. Catalog Bulletin D-1.

IRC Deposited Carbon PRECISTORS combine accuracy and economy for close-tolerance applications, where carbon compositions are unsuitable and wire-wound precisions too expensive. Catalog Bulletin B-4.

IRC Matched Pairs provide a dependable low-cost solution to close-tolerance requirements. Both Type BT and BW Resistors are available in matched pairs. Catalog Bulletin B-3.

IRC Sealed Precision Voltmeter Multipliers are suitable and dependable for use under the most severe humidity conditions. Each consists of several IRC Precisions mounted and interconnected, encased in a glazed ceramic tube. Catalog Bulletin D-2.

is essential

INSULATED COMPOSITION and WIRE WOUND RESISTORS

IRC Advanced Type BT Resistors meet and beat JAN-R-11 Specifications at ⅓, ½, 1 and 2 watts—combine extremely low operating temperature with excellent power dissipation. Catalog Bulletin B-1.

IRC Type BW Wire Wound Resistors are exceptionally stable, inexpensive units for low range requirements. Have excellent performance records in TV circuits, meters, analyzers, etc. Catalog Bulletin B-5.

IRC Type BTAV High Voltage Resistors, developed for use as discharge resistors in fluorescent "Quick Start" ballasts, withstand momentary peak surge of 6000 volts. Also suited to TV bleeder circuits. Catalog Bulletin B-1.

HIGH FREQUENCY and HIGH POWER RESISTORS



IRC Type MP High Frequency Resistors afford stability with low inherent inductance and capacity in circuits involving steep wave fronts, high frequency measuring circuits and radar pulse equipment. Available in sizes from ¼ to 90 watts. Catalog Bulletin F-1.

Type MV High Voltage Resistors utilize IRC's famous filament resistance coating in helical turns on a ceramic tube to provide a conducting path of long, effective length. Result: Exceptional stability even in very high resistance values. Catalog Bulletin G-1.

IRC Type MVX High Ohmic, High Voltage Resistors meet requirements for a small high range unit with axial leads. Engineered for high voltage applications, MVX has exceptional stability. Catalog Bulletin G-2.

IRC Type MPM High Frequency Resistors are miniature units suitable for high frequency receiver and similar applications. Stable resistors with low inherent inductance and capacity. Body only ⅜" long. Catalog Bulletin F-1.

POWER RESISTORS

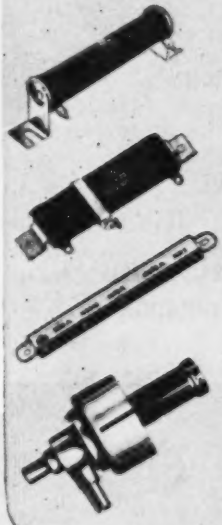

IRC Fixed and Adjustable Power Wire Wounds give balanced performance in every characteristic—are available in a full range of sizes, types and terminals for exacting, heavy-duty applications. Catalog Bulletin C-2.

IRC Type FRW Flat Wire Wound Resistors fulfill requirements of high wattage dissipation in limited space—may be mounted vertically or horizontally, singly or in stacks. Catalog Bulletin C-1.

IRC Type MW Wire Wound Resistors offer low initial cost, lower mounting cost, flexibility in providing taps, and saving in space. Completely insulated against moisture. Catalog Bulletin B-2.

IRC Type LP Water-Cooled Resistors for TV, FM and Dielectric Heating Applications. Cooled internally by high velocity stream of water; adjustable to local water pressure and power dissipation up to 5 K.W.A.C. Catalog Bulletin F-2.

Wherever the Circuit Says -WW-

Power Resistors • Voltmeter Multipliers • Insulated Composition Resistors • Low Wattage Wire Wounds • Volume Controls • Voltage Dividers • Precision Wire Wounds • Deposited Carbon Precistors • Ultra-HF and High Voltage Resistors • Insulated Chokes

25 YEARS YOUNG IN 1950!

IRC

INTERNATIONAL RESISTANCE COMPANY

PHILADELPHIA 8, PENNSYLVANIA

In Canada: International Resistance Company, Ltd., Toronto, Licensee

INTERNATIONAL RESISTANCE CO.
403 N. BROAD ST., PHILADELPHIA 8, PA.

Please send me Technical Data Bulletins checked below:

☐ Bulletin A-2 (W)	☐ Bulletin B-4 (DC)	☐ Bulletin F-1 (MP)
☐ Bulletin A-4 (Q)	☐ Bulletin B-5 (BW)	☐ Bulletin F-1 (MPM)
☐ Bulletin B-1 (BT)	☐ Bulletin C-1 (FRW)	☐ Bulletin F-2 (LP)
☐ Bulletin B-1 (BTAV)	☐ Bulletin C-2 (PWW)	☐ Bulletin G-1 (MV)
☐ Bulletin B-2 (MW)	☐ Bulletin D-1 (WW)	☐ Bulletin G-2 (MVX)
☐ Bulletin B-3 (M/P)	☐ Bulletin D-2 (MF)	

NAME .....

TITLE .....

COMPANY .....

ADDRESS .....

CITY ..... ZONE ..... STATE .....

J. F. ARNDT & CO., ADV. AGENCY

3 TYPES OF VICKERS *Standard* MAGNETIC AMPLIFIERS

...designed to give you better control—at lower cost

Whatever your specific control operation needs in power . . . performance . . . and economy . . . you'll find a Vickers Standard Magnetic Amplifier that is tailored to give your control requirements these benefits:

- **NO MAINTENANCE**
- **HIGH PERFORMANCE**
- **RUGGED CONSTRUCTION**
  No Moving Parts
- **NO WARM-UP TIME**
- **A-C OR D-C CONTROL**
  A-C or D-C Output
- **RESPONDS TO SUM OR DIFFERENCE OF SEVERAL SIGNALS**
- **ALLOWS ELECTRICAL ISOLATION BETWEEN CIRCUITS**



HIGH PERFORMANCE

For 60 cps power sources — 28 styles — maximum output powers from milliwatts to 108 watts.
For 400 cps power sources — 20 styles — maximum output powers from 30 watts to 385 watts.



HIGH GAIN

For 60 cps power sources — 22 styles — maximum output powers from ½ watt to 1200 watts.



HIGH POWER

For 60 cps power sources — 20 styles — maximum output powers from 65 watts to 3660 watts.

TYPICAL APPLICATIONS

Servo Mechanisms • Line-to-line Voltage Regulators • Hydraulic Transmission Controls • A-C and D-C Generator Voltage Regulators • Speed and Frequency Regulators • Lamp and Furnace Controls
Temperature Regulators
Time Delay Devices

NOW AVAILABLE

BULLETIN 20-A, which lists condensed characteristics of the complete line of Vickers Standard Magnetic Amplifiers. Write for your copy today! Please make request on your letterhead.

VICKERS ELECTRIC DIVISION
VICKERS Inc.
1801 LOCUST STREET • ST. LOUIS 3, MISSOURI

No. 9 of a Series

Another Engineer's Problem Solved*

SUBJECT:

400-2000 Cycle Power Factor Correction Capacitors

PROBLEM:

To effect substantial weight and size savings over paper capacitors

SOLUTION:

At 400-2000 cycles the volt-ampere rating of a mineral oil paper capacitor is determined by the dielectric heating versus the heat dissipating characteristics of the dielectric, the impregnant, and the container. With a power factor of .0025 to .003 it is possible to produce paper capacitors measuring 30 cubic inches, and weighing 2 pounds per kilovoltampere. These figures are based on 400 cycle, 2 Kva capacitors operating at 1000 volts. In larger capacitors, the temperature gradient and the radiating surface are less favorable. A 15 Kva capacitor is almost twice the weight and size per Kva.

Our Plasticon Type LS dielectric combination has a power factor of only .0002 to .00025 from 60 to 100,000 cycles. At 400 cycles, the design factor is the voltage rating of the thinnest films available. At 2000 cycles so much current can be handled by the capacitor elements that the internal leads and terminals become an important design consideration.

Below are typical comparisons of Type LS Capacitors with mineral-oil paper capacitors:

Type	Frequency	RMS Volts	Size	Wt.	Kva
LS	400 cps	1000	60 cu. in.	3 lbs.	10
LS	800 cps	1500	60 cu. in.	3 lbs.	11½
LS	2000 cps	800	20 cu. in.	1¼ lbs.	8
MINERAL-OIL PAPER	400 cps	1000	60 cu. in.	4 lbs.	2
	400 cps	1000	700 cu. in.	55 lbs.	10

There is no printed literature available on Type LS power factor capacitors. All Type LS units are built to order. May we quote on your requirements?

• • • • •

We manufacture Plasticon Capacitors, Pulse Forming Networks and High Voltage Power Capacitors

Write for our catalog

Condenser Products Company

1375 NORTH BRANCH STREET • CHICAGO 22, ILLINOIS

Now! Complete coverage!

hp SIGNAL

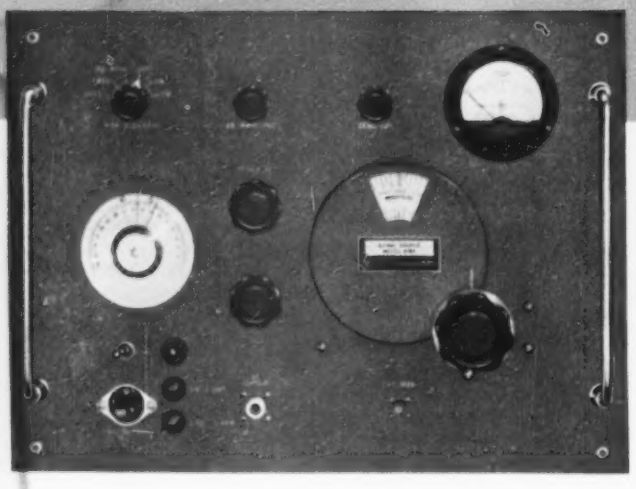

5 precision instruments. Continuous frequency coverage. Frequency, output set and read directly. Wide choice of modulation, pulsing, delay and synchronizing. Superior resetability. Broad applicability.

New *-hp-* Model 618A SHF Signal Generator

Now *–hp–* offers the world's broadest, easiest-to-use line of VHF, UHF and SHF signal generators. These are precision instruments supplying accurately known frequencies up to 7,600 mc. They are deliberately designed for utmost convenience and accuracy in making all kinds of measurements including: receiver sensitivity, selectivity or rejection; signal-noise ratio, conversion gain, SWR, antenna gain, transmission line characteristics; and for driving bridges, slotted lines, filter networks, etc.

New *–hp–* Model 618A, shown above, is for use in the 3,300 to 7,600 mc band. It provides a 1 milliwatt signal into a 50-ohm coaxial load (zero dbm). Its output attenuator reduces output level to less than —100 dbm. Frequency is continuously variable, directly read in mc. Repeller voltage tracks automatically; no adjustment is needed to select the correct frequency. Accuracy is ½ of 1%. The instrument offers external frequency modulation with maximum deviation of ± 10 mc. It also may be externally pulse modulated, with a positive or negative peak of approximately 15 volts. Internal square wave modulation is also provided; frequency range, 400 to 1,000 cps. $2,250 f.o.b. factory.

For complete details, write factory direct or see the -hp- sales representative in your area.

HEWLETT-PACKARD COMPANY
2159A Page Mill Road · Palo Alto, California

Sales representatives in all principal areas. Export: Frazar & Hansen, Ltd., San Francisco, Los Angeles, New York

HEWLETT hp PACKARD

GENERATORS

10 to 7600 mc

10 to 500 mc -*hp*- 608A SIGNAL GENERATOR

Output range 0.1 μv. to 1.0 v. into 50 ohms. Accuracy ± 1 db. Direct reading frequency and output calibration, no charts or interpolation. CW, pulsed or amplitude modulated output (50 to 1,000,000 cps). Resetability better than 1 mc. Master oscillator power amplifier for widest modulation capabilities. Constant internal impedance 50 ohms. Maximum VSWR 1.2. $850 f.o.b. factory.



-hp- Model 608A

450 to 1,200 mc -*hp*- 610B SIGNAL GENERATOR

Output range 0.1 μv. to 0.1 v. into 50 ohms. Accuracy ± 1 db. Output and frequency directly set and read, no charts or interpolation. Modulation: internal or external pulsed, external amplitude, external square wave. Widely variable pulse length, repetition, and delay features. $925 f.o.b. factory.



-hp- Model 610B

800 to 2,100 mc -*hp*- 614A SIGNAL GENERATOR

Output range 0.1 μv. to 0.223 v. (1 mw). Accuracy ± 1 db. Single dial direct reading frequency and output, no charts or interpolation. CW, pulsed and FM output. Modulation: internal pulsed, FM, external pulsed. Widely variable pulsing, synchronizing, delay and triggering features. Extremely fast rise/decay time 0.1 μsec. Constant internal impedance 50 ohms. SWR 3 db. $1,950 f.o.b. factory.



-hp- Model 614A

1,800 to 4,000 mc -*hp*- 616A SIGNAL GENERATOR

Output range 0.1 μv. to 0.223 v. (1 mw). Accuracy ± 1 db. Single dial, direct reading frequency and output, no charts or interpolation. Output, modulation, and synchronization features identical with Model 614A. Like Model 614A, instrument automatically tracks frequency changes, requires no voltage adjustment during operation. $1950 f.o.b. factory.



-hp- Model 616A

HEWLETT (hp) **PACKARD**

FOR BETTER TUBE PERFORMANCE

NOW—MORE THAN EVER BEFORE —ELECTRICAL ALLOYS *MUST BE BETTER*

The critical requirements of television circuits demand better tubes with finer electrical alloys — alloys that are superior electrically, chemically and in physical properties. A logical source for metals to meet these new standards is the Wilbur B. Driver Company, largest producer of carbonized nickel ribbon and filament alloys *for more than twenty years.* Inquiries concerning critical tube applications will receive prompt, capable attention. Write today, outlining your requirements — there is no obligation.

WILBUR B. DRIVER CO.

150 RIVERSIDE AVE., NEWARK 4, NEW JERSEY

ADVENTURES IN ELECTRONIC DESIGN

Centralab's Printed Electronic Circuits May Solve a Problem for You

In a busy Washington office during the past war hung a sign which said — "We do the miraculous every day — the impossible takes just a little longer." Today, that sign could hang in the offices of Centralab. For example, someone wanted a *small* speech amplifier Centralab's answer — Ampec, a full 3 stage unit, two of which can fit inside of a regular pack of cigarettes! A radio manufacturer wanted a *small* audio-detection unit. Centralab's answer Audet, a unit one-third size of an ordinary soda-cracker! How were these things done? With Centralab's ERL Printed Electronic Circuits — a pioneered development of Centralab. Yes, and here are some of the benefits that many manufacturers of radio TV sets and other electronic gear have reaped from using PEC's. They've eliminated numerous individual parts their handling, inventory and assembly. They've gotten more consistent and better performance results. They've reduced finished product size and weight. They've eliminated wiring errors and cut down on the number of soldered connections. What's more, they've been able to stretch their resistor supplies . . . an important factor in meeting current volume demands for TV and radio production. Look over your own situation. Want to cut costs? Speed up assembly? Then on the next two pages you may see a Centralab Printed Electronic Circuit unit that will help you do just that! If you don't see what you want — contact us. Tell us your problems. Maybe we can do the miraculous or take a little longer and accomplish the impossible!

Centralab ERL ® **– DEVELOPMENTS THAT CAN HELP YOU**

Division of GLOBE-UNION INC., Milwaukee

SPEED PRODUCTION...
Use P.E.C.'s*...

*PRINTED ELECTRONIC CIRCUITS
— ARE COMPLETE OR PARTIAL CIRCUITS (including all integral circuit connections) consisting of pure metallic silver and resistance materials fired to CRL's famous Steatite or Ceramic-X and brought out to convenient, permanently anchored external leads. They provide compact miniature units of widely diversified circuits — from single resistor plates to complete speech amplifiers. No other modern electronic development offers such tremendous time and cost saving advantages in low-power applications. See back page for list of technical literature or write for direct factory consulation on your problem
Centralab

CUT ASSEMBLY COSTS
Conserve Resistors

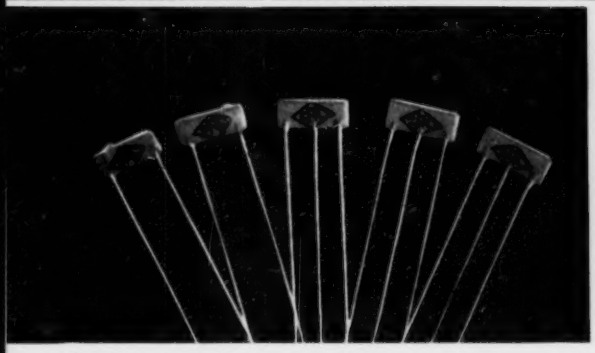

Actual size photograph of a group of plate capacitor, resistor, and resistor-capacitor units. Because of size and ease of installation, they readily fit all types of miniature and portable electronic equipment and overcome crowded conditions in TV, AM, FM and record-player chasses.

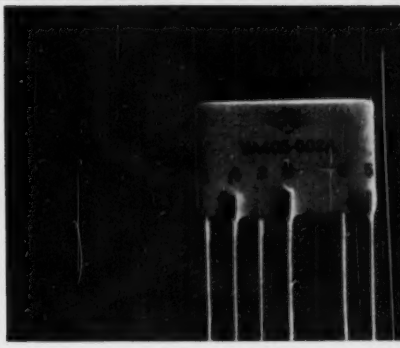

Pentode couplates are complete interstage coupling circuits consisting of 3 capacitors and 3 resistors on a small 6 lead ceramic plate. Compared with old-style audio circuits, they actually reduce soldered connections 50% — wiring errors accordingly. Saving in space and weight is obvious.

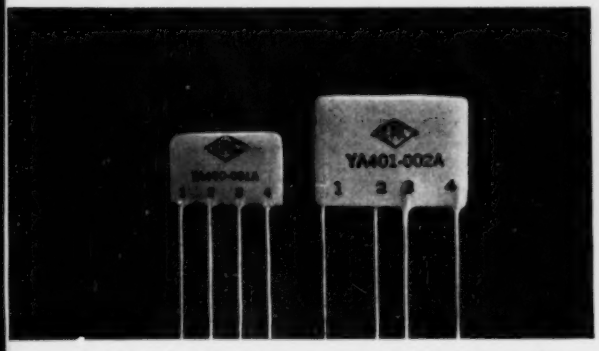

Centralab Triode Couplates save space and weight. They actually replace 5 components normally used in audio circuits. Triode Couplates are complete assemblies of 3 capacitors and 2 resistors bonded to a dielectric ceramic plate. Available in a variety of resistor and capacitor values.

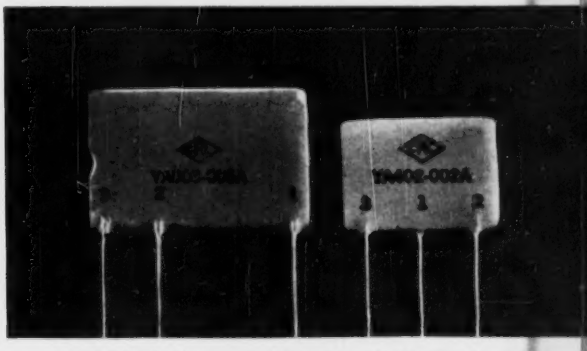

Centralab Vertical Integrators give you big savings in assembly costs, particularly in TV vertical integrator networks. One type consists of 4 resistors and 4 capacitors brought out to 3 leads . . . reducing the formerly required 16 soldered connections to only 3! There's a big saving in the number of parts handled, too!

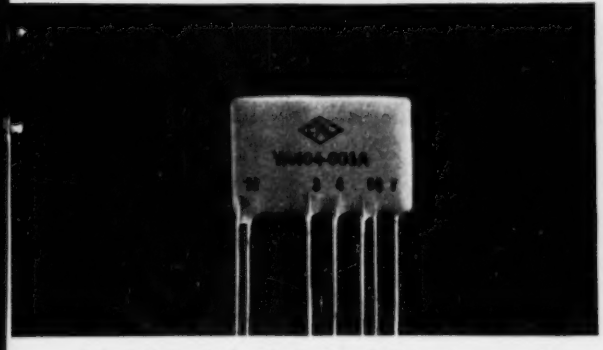

Audet P. E. C. units furnish all values of all components generally comprising the output stage of AC-DC radio receivers. They give you 4 capacitors and 3 resistors on a small plate with only 7 leads. Using Audet for output stage eliminates 50% of your usual soldered connections.

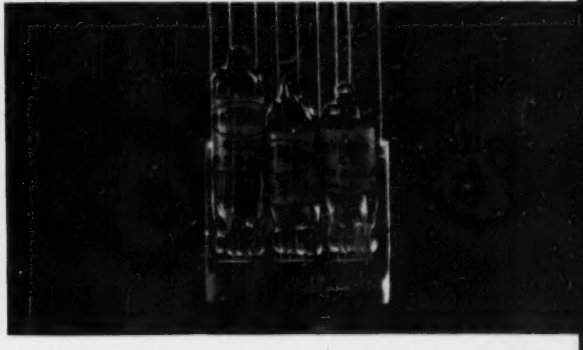

Ampec is a full 3-stage, 3-tube speech amplifier. Gives you truly highly efficient reliable performance. Size: 1¼" x 1⅛" x .340" over tube sockets! Widely used in hearing aids, mike preamps and other amplifier applications where small size and outstanding performance counts.

IMPORTANT BULLETINS FOR YOUR TECHNICAL LIBRARY!

They're factual!

THEY'RE FREE!

Choose From This List!

Centralab Printed Electronic Circuits

973 — AMPEC — three-tube P. E. C. amplifier.
42-6 — COUPLATE — P. E. C. interstage coupling plate.
42-22 — VERTICAL INTEGRATOR — for TV application.
42-24 — CERAMIC PLATE COMPONENTS — for use in low-power miniature electronic equipment.
42-27 — MODEL 2 COUPLATE — for small or portable set applications.
999 — PENTODE COUPLATE — specialized P. E. C. coupling plate.
42-9 — FILPEC — Printed Electronic Circuit filter.

Centralab Capacitors

42-3 — BC TUBULAR HI-KAPS — capacitors for use where temperature compensation is unimportant.
42-4R — BC DISC HI-KAPS—miniature ceramic BC capacitors.
42-10 — HI-VO-KAPS — high voltage capacitors for TV application.
42-59 — CERAMIC TUBULAR TRIMMERS — designed for TV and VHF application.
695 — CERAMIC TRIMMERS — CRL trimmer catalog.
981 — HI-VO-KAPS — capacitors for TV application. For jobbers.
42-18 — TC CAPACITORS — temperature compensating capacitors.
814 — CAPACITORS — high-voltage capacitors.
975 — FT HI-KAPS — feed-thru capacitors.

Centralab Switches

953 — SLIDE SWITCH — applies to AM and FM switching circuits.
970 — LEVER SWITCH — shows indexing combinations.
995 — ROTARY SWITCH — schematic application diagrams.
722 — SWITCH CATALOG — facts on CRL'S complete line of switches.

Centralab Controls

42-19 — MODEL "I" RADIOHM — world's smallest commercially produced control.
42-85 — MODEL 2 RADIOHM — CRL's new line of $\frac{15}{16}$" diam. controls for TV — AM — FM.

Centralab Ceramics

967 — CERAMIC CAPACITOR DIELECTRIC MATERIALS.
720 — CERAMIC CATALOG—CRL steatite, ceramic products.

Look to CENTRALAB in 1950! First in component research that means lower costs for the electronic industry. If you're planning new equipment, let Centralab's sales and engineering service work with you. For complete information on all CRL products, get in touch with your Centralab Representative. Or write direct.

CENTRALAB
Division of Globe-Union Inc.
914 East Keefe Avenue, Milwaukee, Wisconsin

Yes—I would like to have the CRL bulletins checked below, for my technical library!

☐ 973	☐ 42-24	☐ 42-9	☐ 42-10	☐ 981	☐ 953	☐ 42-19
☐ 42-6	☐ 42-27	☐ 42-3	☐ 42-59	☐ 42-18	☐ 970	☐ 42-85
☐ 42-22	☐ 999	☐ 42-4R	☐ 695	☐ 814	☐ 995	☐ 967
				☐ 975	☐ 722	☐ 720

Name _____

Address _____

City _____ State _____

TEAR OUT COUPON
for the Bulletins you want

Centralab
CRL
Division of GLOBE-UNION INC. • Milwaukee

The one millionth Teletron recently rolled off the production line. It was all in the day's work for Du Mont's vast Allwood plant geared to over a million TV picture tubes a year. Yet that tube established a unique record, because it represented the one millionth BIG TUBE. No other manufacturer has made that many BIG TUBES.

Ever since 1939 when Du Mont introduced the first commercial television set with its 14″ Teletron, Du Mont has pioneered BIG TV TUBES. While others were offering 7″ and 10″ tubes, Du Mont was satisfied with nothing less than 12″. Even as early as 1939, Du Mont made 20″ Teletrons. Since then the public and industry have followed the Du Mont lead, but Du Mont remains in the lead with still larger tubes climaxed by the 30″ Teletron available shortly.

Obviously, in BIG TUBES the BIG NAME is DU MONT.

DU MONT

*Teletrons**

First with the Finest in Television

Literature on request *Trade Mark

ALLEN B. DU MONT LABORATORIES, INC.
TUBE DIVISION • CLIFTON, N. J.

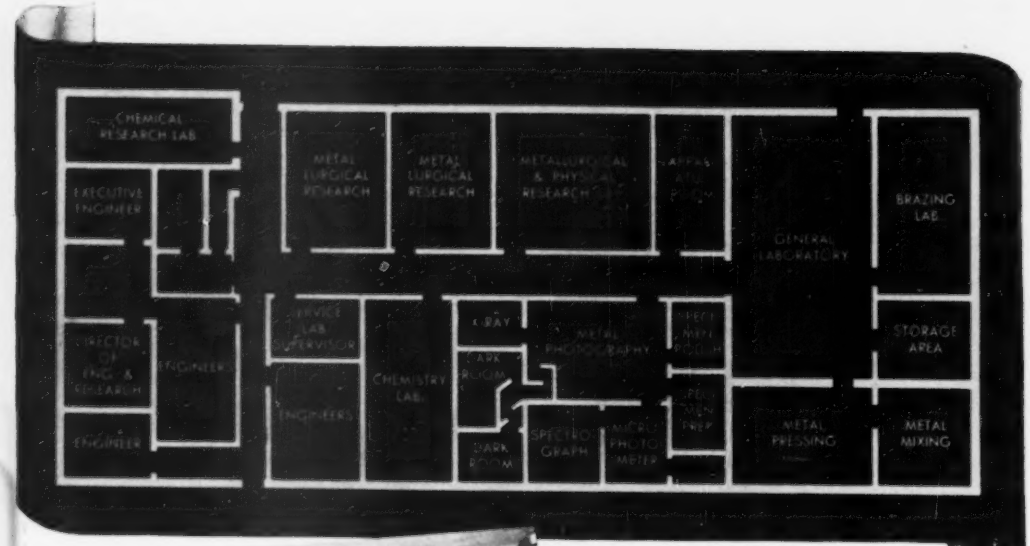

The Carboloy Company facilities devoted to engineering, research and quality control cover an area of more than 8,500 sq. ft.

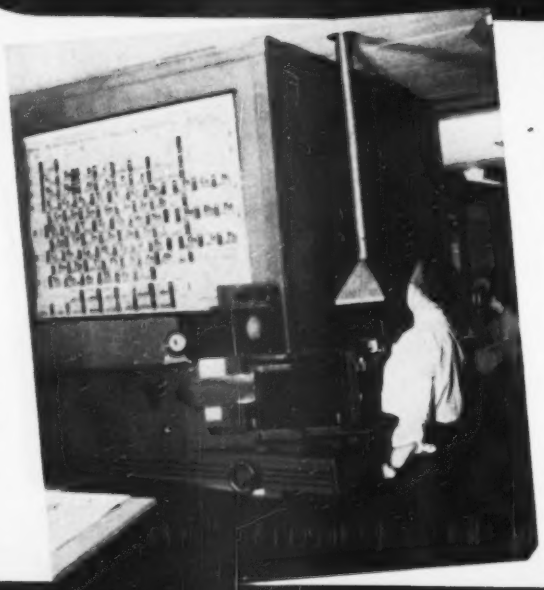

← Spectrographic analysis—one of the many exhaustive tests used by Carboloy Company to maintain high quality.

Since Carboloy Company, Inc., first pioneered cemented carbides 22 years ago, rigid quality control has always been given top priority. This same rigid control is now being applied to production of permanent magnets and other special metals in the Carboloy Company family. It is positive assurance of outstanding uniformity and performance in any product that bears the Carboloy Company name.

LOOK to CARBOLOY CO., INC.

for the finest in special metals

CARBIDES · **ALNICO** · HEVIMET

VHF

UHF

IMPEDANCE MEASUREMENTS

SPEED AND CONVENIENCE

Rapid, accurate measurement of impedance, reflection coefficient and standing wave ratio. Small size, convenient for field use.

50 to 500 Mc.

Can be inserted in various sizes of solid coaxial line or flexible cables.

Make three readings, plot diagram and read off impedance to ± 5%.

$400.00.

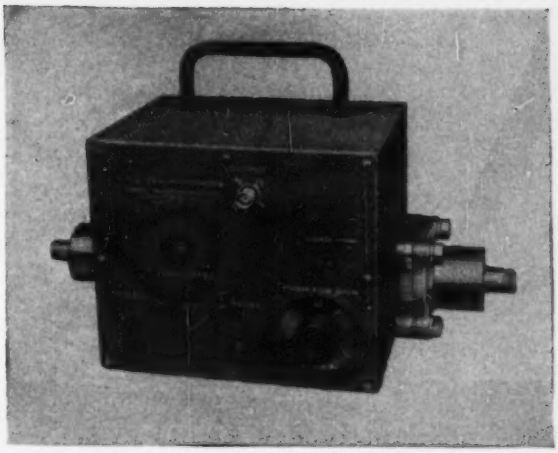

FTL-42A IMPEDOMETER

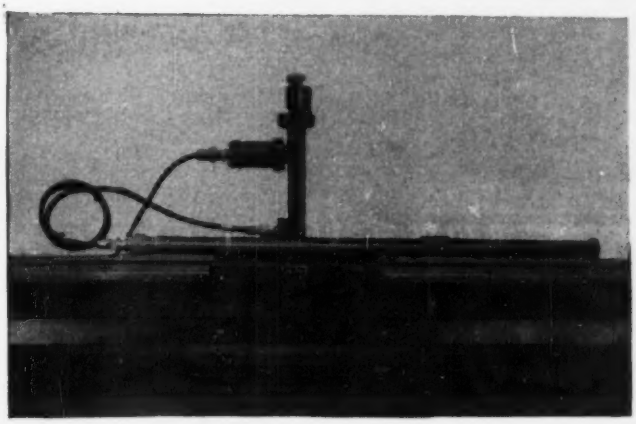

PRECISION

Precise impedance measurements in the range of 60 to 1000 megacycles per second. Accuracy ± 2%.

1000 to 2000 Mc range covered with slightly reduced accuracy.

Coaxial line 250 centimeters long having a surge impedance of 51.0 ohms ± 0.5 ohms.

$2,495.00.

FTL-30A SLOTTED LINE

Write for FTL-30A and FTL-42A brochures

INTERNATIONAL TELEPHONE AND TELEGRAPH — FTL

Federal Telecommunication Laboratories, Inc.

500 Washington Avenue — Nutley 10, New Jersey

..this letter speaks for itself!

Admiral Corporation
Mr. Hal Mehring
Simpson Electric Company
5200 West Kinzie Street
Chicago 44, Illinois
Dear Hal:
This is to tell you how delighted we are here at Admiral with the new Model 303 Simpson Vacuum Tube Volt-Ohmmeter. It certainly is a versatile instrument for television servicing.
The large meter is very legible, and yet the instrument itself is a compact size. I particularly like the AC voltage range, which is the widest I've ever seen on this type of instrument.
Our service engineers think you've done a good job on the Operator's Manual, too, because it is both complete and concise.
Of course, we've used the Simpson Model 260 Volt-Ohm-Milliammeter for years. The "303" is a fine companion instrument to the "260".
Congratulations!
Sincerely yours,
ADMIRAL CORPORATION
W. J. Schinke
National Service Manager
WJS:ar

Model 303
VACUUM TUBE VOLT-OHMMETER

SPECIFICATIONS

DC Voltage
Ranges 1.2, 12, 60, 300, 1200 (30,000 with Accessory High Voltage Probe)
Input Resistance 10 megohms for all ranges
DC Probe with one megohm isolating resistor Polarity reversing switch

Ohms *Ranges* 1000 (10 ohms center)
100,000 (1000 ohms center)
1 megohm (10,000 ohms center)
10 megohms (100,000 ohms center)
1000 megohms (10 megohms center)

AC Voltage
Ranges 1.2, 12, 60, 300, 1200
Impedance (with cable) approx. 200 mmf shunted by 275,000 ohms

AF Voltage
Ranges 1.2, 12, 60
Frequency Response Flat to 100,000 cycles

Decibels
Ranges −20 to +3, −10 to +23, +4 to +37, +18 to +51, +30 to +63
Zero Power Level 1 M. W., 600 ohms

Galvanometer
Zero center for FM discriminator alignment and other galvanometer applications

R. F. Voltage
(Signal tracing with Accessory High Frequency Crystal Probe)
Range 20 volts maximum
Frequency Flat 20 KC to 100 M.C.
105-125 V., 60 cycles

Size
5¼"x7"x3½" (bakelite case). *Weight:* 4 lbs. *Shipping Wt.:* 6½ lbs.

Dealer's Net Price
Model 303, including DCV Probe, ACV–Ohms probe and Ground Lead—$58.75;
Accessory High Frequency Probe, $7.50;
Accessory High Voltage Probe, $14.85
Also available with roll top case, Model 303RT—$64.75

Simpson ELECTRIC COMPANY
5200 WEST KINZIE STREET, CHICAGO 44, ILLINOIS • IN CANADA: BACH-SIMPSON, LTD., LONDON, ONTARIO
Phone: COlumbus 1-1221

MORE ENGINEERS THAN EVER BEFORE DEPEND UPON *FILTRON* FOR RF INTERFERENCE SUPPRESSION FILTERS

BELL HTL-3 HELICOPTER

filtered by FILTRON

CONSOLIDATED VULTEE B-36 BOMBER

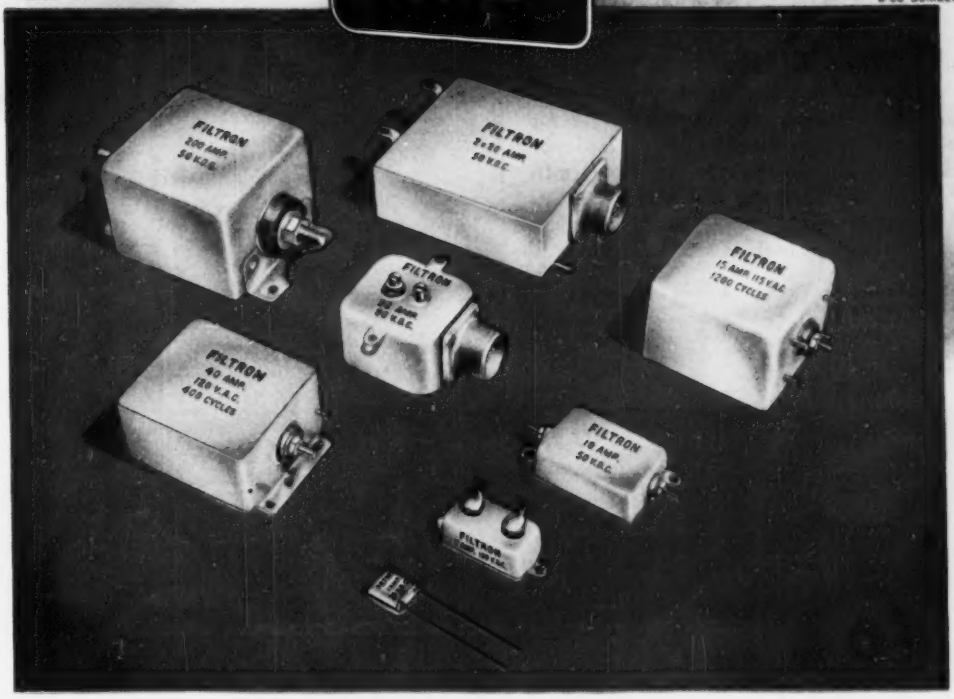

FILTRON IS SPECIFIED ON THE MAJORITY OF MODERN AIRCRAFT, GUIDED MISSILES, SIGNAL CORPS, ORDNANCE AND NAVAL EQUIPMENT

FILTRON'S engineering staff and production facilities are providing better – more compact – efficient filters, to meet today's urgent demand.

FILTRON'S engineering division, staffed by experienced RF Interference Suppression engineers, is available for the measuring, testing and filter design for your equipment. With more than 500 standard filter types available, FILTRON'S engineers can choose the right filter for your application, or design a special filter to meet your size, weight, mounting, voltage and current requirements.

FILTRON'S modern shielded laboratories are equipped to measure RF Interference from 14 KC to 1000 MC, in accordance with military specifications.

FILTRON'S production facilities are meeting all schedules and delivering on time . . .

BECAUSE:

FILTRON'S capacitor manufacturing division, coil winding division, metal fabrication shop and metal stamping departments are exclusively producing the highest quality components for FILTRON'S RF Interference filters.

RF INTERFERENCE SUPPRESSION FILTERS FOR:

Motors	Dynamotors
Generators	Power Plants
Inverters	Actuators
Electronic Controls	Gasoline Engines

And other RF Interference producing equipment

An inquiry on your Company letterhead will receive prompt attention

THE FILTRON CO., INC.

BAYSIDE, LONG ISLAND, N. Y.

LARGEST EXCLUSIVE MANUFACTURERS OF RF INTERFERENCE FILTERS

INDUSTRIAL TEST EQUIPMENT

SHOOT TROUBLE *on the line...* REDUCE COSTLY SHUTDOWNS!

INDUSTRIAL OSCILLOSCOPE—For tracing circuit trouble in electronic-control equipment, this scope is fast, accurate, and dependable. Ideal for checking welding machines, high wave capacitor discharge panels, variable speed motor controls. Set it down anywhere—the case is insulated . . . carry it easily—weighs only 27 pounds . . . use it in many ways—tests both AC and DC.

- ★ Tests make-and-break of relay circuits
- ★ Checks waveforms in Thyratron control
- ★ Max. input voltage 550
- ★ Sensitivity 0.15 volts dc/inch; 0.18 volts rms/inch.

IN WELDING OPERATIONS—USE IT TO

- ★ check "hard-starting" ignitrons
- ★ observe voltage shapes on tube elements in timing sequence circuits
- ★ check instantaneous regulation on high current welder supply line
- ★ set "full heat-limit adjustment"
- ★ check relays for bounce and high resistance contactors
- ★ check "on" and "off" time in seam welders
- ★ check behavior of peaking transformers
- ★ check high frequency interference switch transients caused by other equipment

INDUSTRIAL TUBE ANALYZER—Which tubes are bad? Don't guess—check them quickly, easily with this Analyzer that pays for itself in the cost of tubes you would normally scrap. Tests Thyratrons and Phanatrons with ratings up to 100 amperes peak current. Can be operated by non-technical personnel after brief instruction. Backs up the G-E Industrial Oscilloscope to boost your maintenance efficiency, cut your costs.

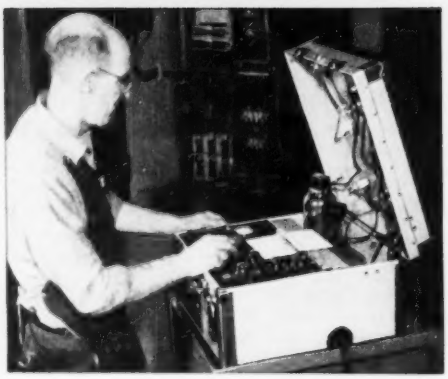

GET THIS CATALOG — IT'S FREE!

Contains specifications and price information on instruments shown here as well as other items of G-E electronic test equipment. Write: *General Electric Company, Section4110 Electronics Park, Syracuse, New York.*

GENERAL ELECTRIC

It's a fact that

AlSiMag is impervious to moisture

AlSiMag is as light as aluminum

AlSiMag is harder than granite

AlSiMag does not rust, oxidize or corrode

AlSiMag is non-magnetic

AlSiMag has higher insulation at high temperature than fused quartz

AlSiMag withstands higher compressive loads than steel

AlSiMag is chemically inert

AlSiMag is permanently rigid

AlSiMag has lower coefficient of expansion than any commonly used metal

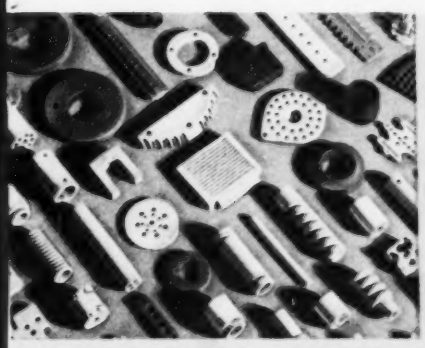

ALSIMAG

TRADE MARK REGISTERED U.S. PATENT OFFICE

CUSTOM MADE TECHNICAL CERAMICS

AlSiMag is the trade name of a large family of versatile ceramics. Among the many AlSiMag compositions, you may find one which has exactly the physical characteristics you need. AlSiMag makes parts to your blue prints, cooperates on design when desired. These parts come to you ready for your assembly line. They are uniform, dimensionally accurate, and are economically fabricated in quantity. The AlSiMag Property Chart is sent free on request.

AMERICAN LAVA CORPORATION

49TH YEAR OF CERAMIC LEADERSHIP

CHATTANOOGA 5, TENNESSEE

OFFICES: METROPOLITAN AREA: 671 Broad St., Newark, N. J., Mitchell 2-8159 • CHICAGO, 228 North LaSalle St., Central 6-1721
PHILADELPHIA, 1649 North Broad St., Stevenson 4-2823 • LOS ANGELES, 232 South Hill St., Mutual 9076
NEW ENGLAND, 38-B Brattle St., Cambridge, Mass., Kirkland 7-4498 • ST. LOUIS, 1123 Washington Ave., Garfield 4939

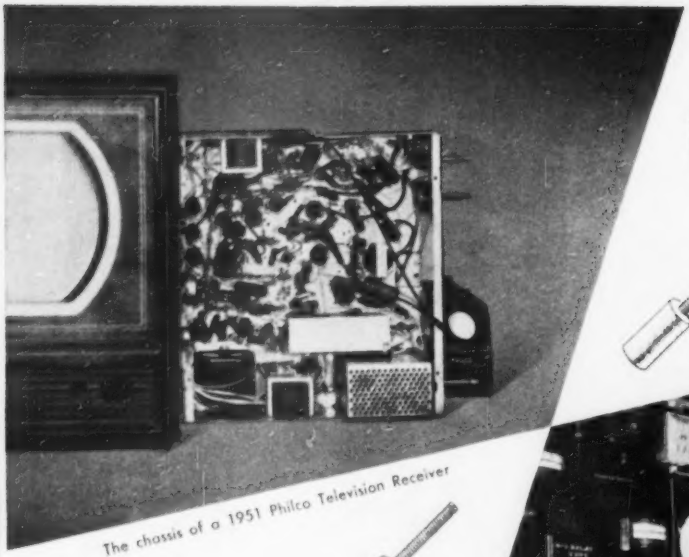

The chassis of a 1951 Philco Television Receiver





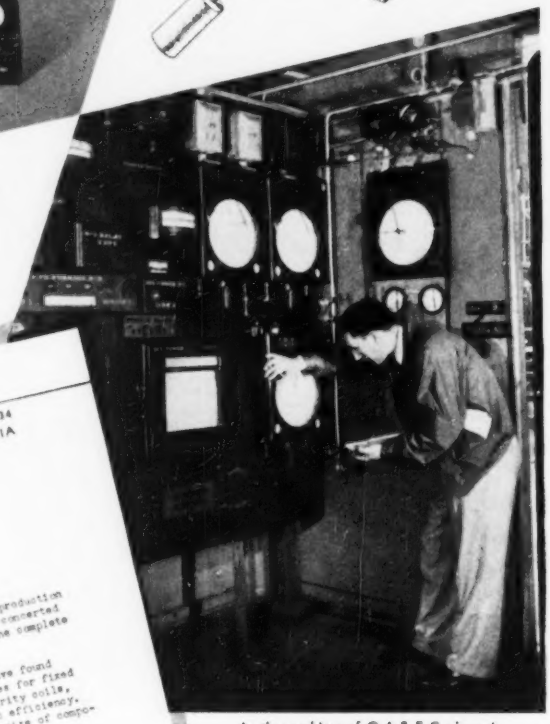

In the making of G A & F Carbonyl Iron Powders only the strictest methods of Quality Control are observed

PHILCO CORPORATION

PHILADELPHIA 34
PENNSYLVANIA

September 5, 1950

Mr. T. H. Moore, Sales Manager
Antara Products - General Aniline & Film Corporation
444 Madison Avenue
New York 22, N. Y.

Dear Mr. Moore:

For the past two years Philco has tremendously increased its production of television receivers, and at the same time we have made a concerted drive to improve the quality of all components, as well as the complete receivers.

In line with this successful Quality Control program, we have found that your Carbonyl Iron Powders, used in powdered iron cores for fixed and variable inductances, in such parts as width and linearity coils, IF transformers and tuner coils, result in greater circuit efficiency. At the same time, it has also been possible to reduce the size of components which incorporated powdered iron.

Because of these advantages, reduced size and increased efficiency of components, as well as a uniformly high standard of quality, your Carbonyl Iron Powders have aided us in keeping the quality of Philco television receivers at the highest level. This has been particularly important because we have stepped up quantity of production as greatly along with quality. We are aiming at manufacturing more than 1,000,000 Philco television receivers in 1950.

Very truly yours,

PHILCO CORPORATION

T. M. Craig
Director of Engineering
Electronics Division

G A & F® Carbonyl

SIZES REDUCED... EFFICIENCY INCREASED

for components of PHILCO Television Receivers through use of

CARBONYL IRON POWDERS

PHILCO Television Receivers are produced under rigid, scientific methods of Quality Control . . . So are G A & F Carbonyl Iron Powders . . . It was all but inevitable that the combination would produce components of high efficiency and top performance.

However, Philco was not blindly worshipping an abstract ideal. *Reduced sizes* became a second, highly desirable result. Third, as leading core makers have testified, it *costs less* to work with quality materials—such as G A & F Carbonyl Iron Powders.

The savings and the gains are both more numerous and more important than are here indicated. Let us send you the book described below . . . Ask your core maker, your coil winder, your industrial designer, how G A & F Carbonyl Iron Powders can improve the performance of the equipment you manufacture. It will cost you nothing to get the facts.

THIS FREE BOOK — fully illustrated, with performance charts and application data — will help any radio engineer or electronics manufacturer to step up quality, while saving real money. Kindly address your request to Department 51.

ANTARA® PRODUCTS
DIVISION OF
GENERAL DYESTUFF CORPORATION
435 HUDSON STREET · NEW YORK 14, NEW YORK

BRANCHES
Boston • Providence • Philadelphia • Charlotte, N. C. • Chicago • Portland, Ore. • San Francisco • Oakland

Iron Powders . . .

MEMBER mpa METAL POWDER ASSOCIATION

A NEW Insulating Laminate...

INSUROK* GRADE T-812

COMBINES:

- SUPERLATIVE INSULATION RESISTANCE
- LOW MOISTURE ABSORPTION
- VERY HIGH STRENGTH
- EXCELLENT PUNCHABILITY

*Reg. U. S. Pat. Off.

INSUROK T-812 is a new paper-base punching stock that laughs at heat and humidity! It has outstanding properties that have never before been combined in one insulating laminate. T-812 has excellent electrical characteristics, plus a spectacular ability to retain them through extremes of heat and humidity. Its insulation resistance after humidity conditioning is particularly noteworthy.

INSUROK T-812 retains all of the properties of the well-known INSUROK T-725 and, in addition, has lower moisture absorption and much higher insulation resistance. It punches readily into intricate shapes. Investigate INSUROK T-812 for your product. Information upon request.

T-812's *Property Combination* —Unmatched by any other material!

Thickness tested	.1 16"			
Moisture Absorption (24 hours)	0.38%			
Expansion after 24 hours' immersion in water at 77°F. Center	0.0001"	Edge		0.0002"
Tensile Strength, psi	Main Direction	19,500	Cross Direction	14,500
Flexural Strength, psi	Main Direction	23,000	Cross Direction	18,000
Dielectric Strength (perpendicular to laminations) V/Mil, Short Time		725	Step by Step	625

	Tests at Room Conditions	After 96 hrs. at 90% Rel. Hum. at 104°F.
Power Factor at 1 megacycle	0.028	0.030
Dielectric Constant at 1 megacycle	4.4	4.5
Loss Factor at 1 megacycle	0.13	0.14
Insulation Resistance, megohms		1,000,000

The RICHARDSON COMPANY

FOUNDED 1858—LOCKLAND, OHIO

2797 Lake St., Melrose Park, Illinois (Chicago District)

SALES OFFICES: CLEVELAND • DETROIT
INDIANAPOLIS • LOCKLAND, OHIO • MILWAUKEE
NEW BRUNSWICK, (N. J.) • NEW YORK
PHILADELPHIA • ROCHESTER • ST. LOUIS

Typical of the TOUGH POTENTIOMETER JOBS solved by Helipot

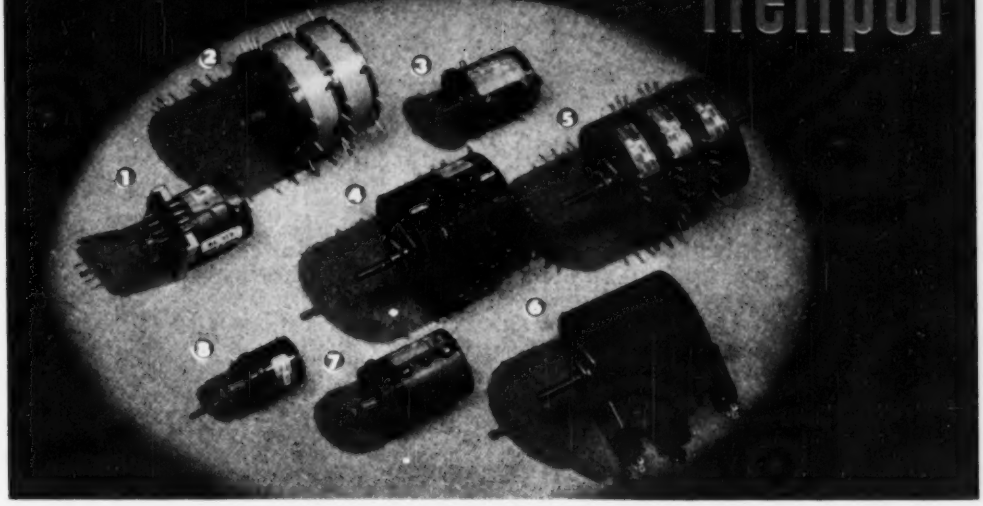

Precise Accuracy + Maximum Versatility + Space-saving Compactness

The potentiometers illustrated above are typical examples of the tough problems HELIPOT engineers are solving every day for modern electronic applications. If you have a problem calling for utmost precision in the design, construction and operation of potentiometer units—coupled with minimum space requirements and maximum adaptability to installation and operating limitations—bring your problems to HELIPOT. Here you will find advanced "know-how," coupled with manufacturing facilities unequaled in the industry!

The HELIPOTS above—now in production for various military and industrial applications—include the following unique features . . .

❶ This 10-turn HELIPOT combines highest electrical accuracies with extremes in mechanical precision. It features zero electrical and mechanical blacklash...a precision-supported shaft running on ball bearings at each end of the housing for low torque and long life . . . materials selected for greatest possible stability under aging and temperature extremes . . . special mounting and coupling for "plug-in" convenience . . . mechanical and electrical rotation held to a tolerance of ½° . . . resistance and linearity accuracies, ±1% and ±0.025%, or better, respectively.

❷ *This four-gang assembly of Model F single-turn potentiometers has a special machined aluminum front end for servo-type panel mounting with shaft supported by precision ball bearings and having a splined and threaded front extension. Each of the four resistance elements contains 10 equi-spaced tap connections with terminals, and all parts are machined for greatest possible stability and accuracy.*

❸ This standard Model A, 10-turn HELIPOT has been modified to incorporate ball bearings on the shaft and a special flange (or ring-type) mounting surface in place of the customary threaded bushing. This HELIPOT also contains additional taps and terminals at the ¼- and 9¼-turn positions.

❹ *This standard Model B, 15-turn* HELIPOT *has a total of 40 special tap connections which are located in accordance with a schedule of positions required by the user to permit external resistance padding which changes the normally-linear resistance vs. rotation curve to one having predetermined non-linear characteristics. All taps are permanently spot-welded and short out only one or two turns on the resistance element—a unique* HELIPOT *feature!*

❺ This six-gang assembly of standard Model F single-turn potentiometers has the customary threaded bushing mountings, and has shaft extensions at each end. The two center potentiometers each have 19 equi-spaced, spot-welded tap connections brought out to terminals. *Each tap shorts only two turns of .009" diameter wire on the resistance element.*

❻ *This Model B, 15-turn* HELIPOT *has been modified to incorporate, at the extreme ends of mechanical and electrical rotation, switches which control circuits entirely separate from the* HELIPOT *coil or its slider contact.*

❼ This 10-turn HELIPOT has many design features similar to those described for unit No. 1, plus the following additional features . . . a servo-type front end mounting . . . splined and threaded shaft extension . . . and a center tap on the coil. All components are machined to the highest accuracy, with concentricities and alignments held in some places to a few *ten-thousandths* of an inch to conform to the precision of the mechanical systems in which this HELIPOT is used. *Linearity accuracies frequently run as high as ±0.010%!*

❽ *This single-turn Model G Potentiometer has been modified to incorporate a ball bearing shaft and a servo-type front end mounting. Special attention is given to contact designs and pressures to insure that starting torque does not exceed 0.2 inch-ounces under all conditions of temperature.*

The above precision potentiometers are only typical of the hundreds of special-ized designs which have been developed and produced by HELIPOT to meet rigid customer specifications. For the utmost in accuracy, dependability and adaptability, bring your potentiometer problems to HELIPOT!

Representatives in all major areas of the United States. Export agents: Frathom Co., 55 W. 42nd St., New York 18.

THE Helipot CORPORATION, SOUTH PASADENA 2, CALIFORNIA

An outstanding

MICA
ELECTRICAL
INSULATION

CEE Grade Lamicoid® #6050

It's in a class by itself!

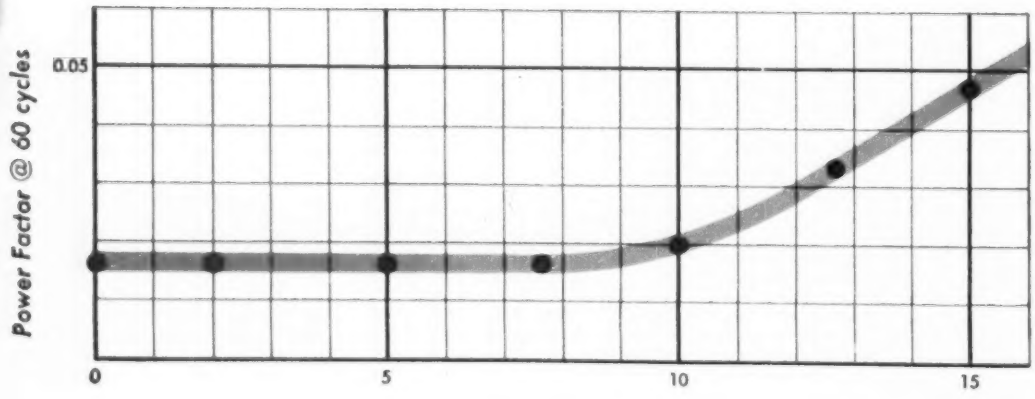

The graph above shows power factor at 60 cycles for CEE Grade LAMICOID #6050 at various crest kilovolt stresses when tested in accordance with ASTM Designation D-150-47T after conditioning for 24 hrs. at 100° C.

DEVELOPMENT !

has exceptionally low power factor at 60 cycles!
new material tailored
specifically for transformer applications means:
lower losses
higher dielectric strength
lower water absorption

Here's a brand new grade of LAMICOID developed by Mica Insulator Company especially to provide good electrical properties for high voltage use at commercial power frequencies.

Class A insulation, designed to withstand a "hottest-spot" temperature of 105 C (221 F), CEE Grade LAMICOID #6050 is ideal for oil-filled transformers, terminal boards and regulator switchplates. Here's why:

Its low power factor at 60 cycles provides an important advantage in transformers being manufactured to present-day specifications.

Because it is an exceptionally low loss material, LAMICOID #6050 does not heat up as readily as high loss materials when subjected to ordinary operating conditions.

Its dielectric strength parallel to the laminations is unusually high for canvas based laminates—60.0 KV plus when tested in oil at 85° C, using #3 taper pins 1" apart.

Its water absorption is unusually low for canvas based laminates—0.35% when tested in accordance with procedure outlined in ASTM designation D-570.

In addition, the new LAMICOID #6050 has good aging characteristics, and won't blister or delaminate in hot oil at 105° C. Made of selected quality fabric base material and special thermosetting resins, it's tough and strong—provides good mechanical support for conducting elements, coils, etc. LAMICOID #6050 can be supplied in sheets 36" x 42".

Products like LAMICOID #6050 are developed by getting down to cases. We've had 57 years' experience doing just that—*and* coming up with the answers, a line of high quality insulating materials. Your problem is our opportunity to make this experience pay off—for *both* of us. That's why we're glad to hear about your problems—and to work with you in developing materials tailored exactly to your requirements. Why not get in touch with our technical service staff today?

MICO ELECTRICAL INSULATION

MICA *Insulator* **COMPANY**

Schenectady 1, New York
Offices in Principal Cities

THE MUSHROOM-LIKE OBJECT directly below is the completed assembly of the radio volume control shaft made by P. R. Mallory & Co., Inc., Indianapolis, Ind., (actual size). Photo below it shows the plastic part attached by a staking operation. This staking is shown in detail in photo of part enlarged 7 times, at right. Photo at bottom shows control shaft after machining and before staking. Shaft is made from Revere Alloy 247 . . . ¼" round free cutting brass rod.

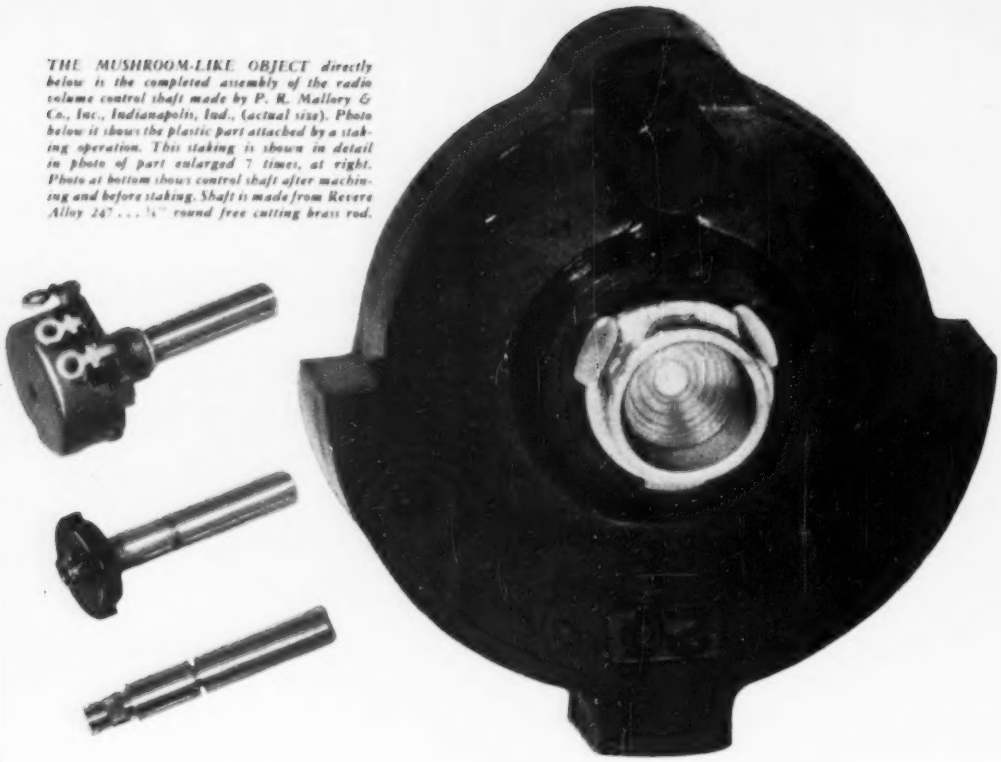

BY SWITCHING TO REVERE FREE CUTTING BRASS ROD P. R. MALLORY & CO., INC.,

SAVES ON 2 COUNTS!

Staking operation on radio volume control shaft performed without fracture . . . annealing operation eliminated.

The solution to the Mallory Company's problem was not as easy as it might appear. It was not simply a case of Revere Technical Advisory Service recommending ¼" round, free cutting brass rod. That rod had to possess the machinability to match Mallory's existing production machine set-up and at the same time be sufficiently workable so that annealing, prior to staking, could be eliminated; and that staking be accomplished without fracturing the metal.

After consulting with the Mallory Engineers, and discussing the tests which Mallory would subsequently conduct, Revere recommended a ¼" round, half hard riveting and turning rod mixture 247. Working tests made by Mallory showed this rod to possess all the necessary requirements.

As a result of those tests, P. R. Mallory & Company is now using this Revere free cutting brass rod to its complete satisfaction for the radio volume control shafts it manufactures. Not just any ¼" brass rod, but the *right* rod made it possible for them to save on 2 counts.

Perhaps Revere has a brass, a copper or some special alloy to help you in the development or improvement of your product . . . in cutting your production costs. So why not tell Revere *your* metal problems? Call the Revere Sales Office nearest you today.

REVERE

COPPER & BRASS INCORPORATED

Founded by Paul Revere in 1801

230 Park Avenue, New York 17, New York

* * *

Mills: Baltimore, Md.; Chicago and Clinton, Ill.; Detroit, Mich.; Los Angeles and Riverside, Calif.; New Bedford, Mass.; Rome, N. Y.
Sales Offices in Principal Cities, Distributors Everywhere.

IT'S UNOBTRUSIVE. Umber gray coloring blends it right into the TV picture. Minimum reflection.

In the show . . .
without stealing the act

RCA's new ribbon-pressure "STARMAKER" *

IT'S COMFORTABLE TO HANDLE . . . weighs only 1 lb.

SO SLIM YOU MUST LOOK sharply to see it . . . so skillfully styled its shape and coloring fade right into the scene . . . this tubular microphone has won the favor of entertainers and announcers wherever it has been shown.

Designed by RCA Laboratories after more than three years of painstaking research, the STARMAKER meets the long need of broadcasting, television, and show business for a high-fidelity microphone that—will not hide the features of performers—is easier to handle—*and yet retains all the high-quality features of RCA professional microphones.* Pick-up is non-directional. Frequency response is uniform, 50 to 15,000 cps.

Here is a "carry-around" microphone free from wind blast and air rumble. It contains no tubes, no condensers, no high-impedance circuits, no special amplifiers, or power supplies—is virtually impervious to mechanical shock.

The STARMAKER fits any standard microphone stand . . . and can be substituted for any professional high-quality RCA microphone. *No extra attachments needed!*

For price and delivery, call your RCA Broadcast Sales Engineer. Or write Dept. 36K, RCA Engineering Products, Camden, N. J.

**Selected from entries submitted by Broadcast Stations in national contest.*

IT'S SMALL. Diameter of body is only 1¼ inches. Diameter of pick-up point is only ⅝ inch!

AUDIO BROADCAST EQUIPMENT

RADIO CORPORATION of AMERICA

ENGINEERING PRODUCTS DEPARTMENT, CAMDEN, N.J.

In Canada: RCA VICTOR Company Limited, Montreal

FERRAMICS

by **GENERAL CERAMICS and STEATITE CORP.**

Ferramics are soft magnetic materials featuring high permeability, extremely high volume resistivity and lightweight. They are readily molded or extruded to practically any size or shape.

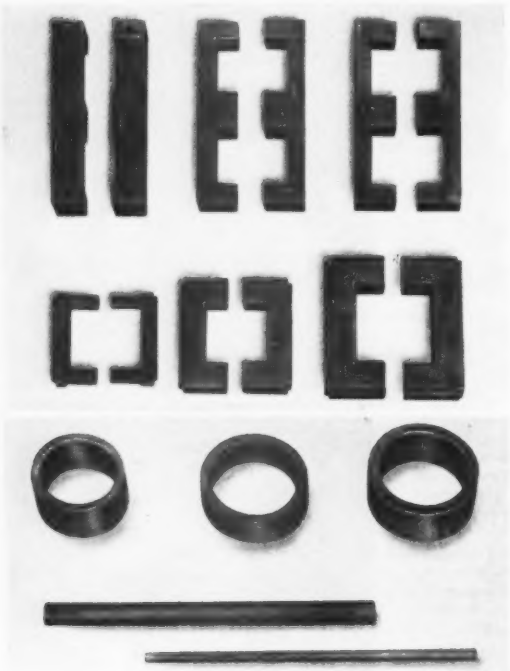

HIGH PERMEABILITY

Reduces size of components, increases circuit Q, results in greater overall efficiency.

HIGH VOLUME RESISTIVITY

Ferramics feature high volume resistivity, allow construction of solid cores with negligible eddy current losses.

HIGH EFFICIENCY

Permits cores of smaller cross-section, reduced cubic volume, improved circuit efficiency.

LIGHT WEIGHT

Ferramics are light in weight, permit important reductions in equipment weight.

NO LAMINATIONS

Ferramic cores are molded in solid shapes reducing the assembly cost of components.

Characteristics

FREQUENCY RANGE:
100 CYCLES TO MEGACYCLES

PERMEABILITY:
15 TO 3500

VOLUME RESISTIVITY:
10^{+4} TO 10^{+9} OHM/CCM

SATURATION FLUX DENSITY:
1000 TO 4000 GAUSS

COERCIVE FORCE:
.2 TO 2 OERSTED

SIZES:
DIE PRESSED OR EXTRUDED TO YOUR SPECIFICATION—A few typical shapes are shown above.

GENERAL

MAKERS OF STEATITE, TITANATES, ZIRCON PORCELAIN, FERRAMICS, LIGHT DUTY

If your product **incorporates any of the following components, it will pay you to check, now, on the many advantages offered by FERRAMICS. Engineering data and information on many typical applications will be supplied on request.**

TELEVISION HORIZONTAL OUTPUT TRANSFORMER CORES:

Smaller, more efficient cores.

TELEVISION YOKE COIL CORES:

Makes greater beam deflection possible and hence shorter cathode ray tubes.

RADIO BROADCAST RECEIVER ANTENNA CORES:

Improved reception, reduces antenna size.

TOROIDAL COIL CORES:

Increased induction, low coil loss.

CUP CORES:

Audio Frequencies — high Q, low loss, close shielding, lower cost due to bobbin wound coils.

ELECTRONIC COMPUTERS:

Magnetic memory systems—stored data available more efficiently, eliminates vacuum tubes, reduces component size.

Pulse transformer cores—less distortion, lower core losses.

PERMEABILITY TUNING CORES:

Increased tuning range due to higher permeability.

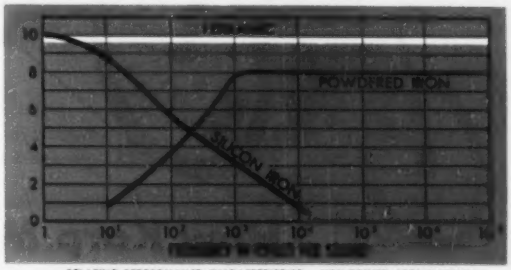

RELATIVE PERFORMANCE CHARACTERISTICS — NON-POWER APPLICATIONS

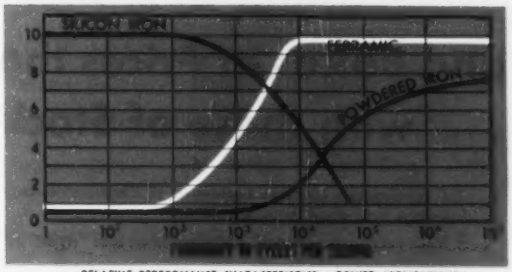

RELATIVE PERFORMANCE CHARACTERISTICS — POWER APPLICATIONS

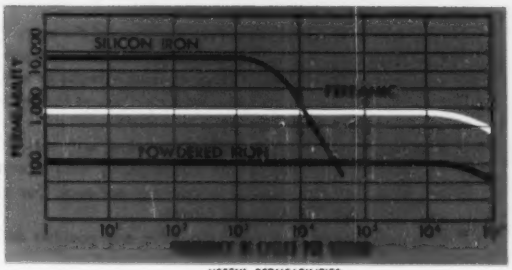

USEFUL PERMEABILITIES

General CERAMICS AND STEATITE CORP.

GENERAL OFFICES and PLANT: KEASBEY, NEW JERSEY

REFRACTORIES, CHEMICAL STONEWARE, IMPERVIOUS GRAPHITE

How Karp Makes
Custom-Built Metal Cabinets
and Boxes at Prices that Compete with those of Stock Items

The advantages and true economies of Karp custom-built cabinets, boxes, or housings over stock items are these:

- Your own exclusive design distinguishes and "styles" your product . . . gives it more market value.
- Flexibility of construction details speeds and simplifies your final assembly —saving you time and money.
- Our vast stock of dies can save you special die costs.
- Our 70,000 square feet of modern plant, with hundreds of craftsmen, means ample capacity for many types of work—simple or elaborate—at one time.
- Plant is fully equipped with every mechanical facility that aids economical production.
- Finishing is done in dustproof paint shop, with latest water-washed spray booths and gas-fired ovens mechanically and electronically controlled.
- We make no stock items or products of our own. Our plant, time and effort are 100% for our customers' work.
- Our engineering staff can help solve any possible design and production problems.
- It's results that count—and we give you the results you want.

Write for illustrated data book describing our facilities and showing the wide range of sheet metal fabrication we do.

CABINETS • BOXES • CHASSIS • HOUSINGS • ENCLOSURES

KARP METAL PRODUCTS CO., INC.

215 63rd STREET, BROOKLYN 20, NEW YORK

Specialists in Fabricating Sheet Metal for Industry



TV Monitor Console

Desk Panel Cabinet Rack



Induction Heater Housing



Chassis



Marine Radio Housing



Cabinet

the FIRST all band-direct reading

SPECTRUM ANALYZER

10 MCS to 16,520 MCS

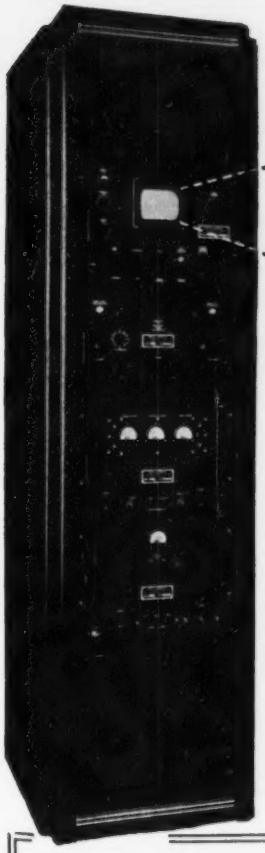

Polarad's Model LSA Spectrum Analyzer is the result of years of research and development. It provides a simple and direct means of rapid and accurate measurement and spectral display of an r.f. signal.

Outstanding Features:

- Continuous tuning.
- One tuning control.
- 5 KC resolution at all frequencies.
- 250 KC to 25 MCS display at all frequencies.
- Tuning dial frequency accuracy 1 per cent.
- No Klystron modes to set.
- Broadband attenuators supplied with equipment above 1000 MCS.
- Frequency marker for measuring frequency differences 0-25 MCS.
- Only three tuning units required to cover entire range.
- Microwave components use latest design non-contacting shorts for long mechanical life.
- Maximum frequency coverage per dollar invested.
- 5 inch CRT display.

The equipment consists of the following units:

Model LTU-1 R. F. Tuning Unit—10 to 1000 MCS.
Model LTU-2 R. F. Tuning Unit—940 to 4500 MCS.
Model LTU-3 R. F. Tuning Unit—4460 to 16,520 MCS.
Model LDU-1 Spectrum Display Unit.
Model LKU-1 Klystron Power Unit.
Model LPU-1 Power Unit.

Where Used:

Polarad's Model LSA Spectrum Analyzer is a laboratory instrument used to provide a visual indication of the frequency distribution of energy in an r.f. signal in the range 10 to 16,520 MCS.

Other uses are:

1. Observe and measure sidebands associated with amplitude and frequency modulated signals.
2. Determine the presence and accurately measure the frequency of radio and/or radar signals.
3. Check the spectrum of magnetron oscillators.
4. Measures noise spectra.
5. Check and observe tracking of r.f. components of a radar system.
6. Check two r.f. signals differing by a small frequency separation.

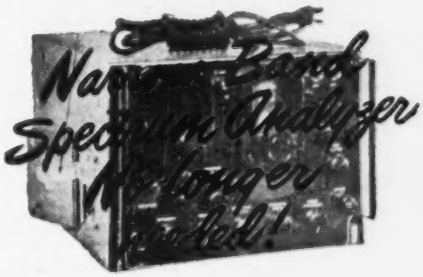

Write for complete details

Polarad
Electronics Corporation

100 METROPOLITAN AVE. • BROOKLYN 11, N. Y.

Millimeters that do a Mammoth Job with Driver-Harris Alloys

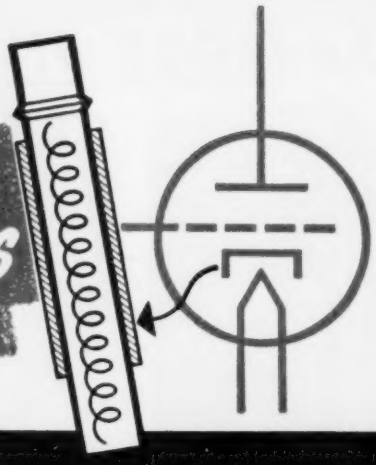

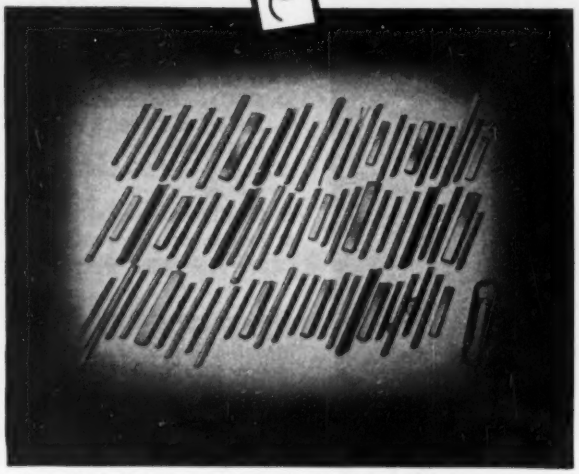

D-H Alloy Cathodes, as produced by Superior Tube Company, Norristown, Pa., are made from thin strip stock, of thicknesses such as .002" and .0025"—handled by patented machines especially developed for the purpose of producing plain or beaded "Lockseam" type nickel cathode sleeves. Basic Dimensions: Max. OD—.100"; Min. OD—.040". Max. Length—42 mm.; Min. Length—11.5 mm. (Compare with paper clip.)

The introduction of the indirectly heated "cathode" brought about revolutionary improvement in the operation of electron tubes for radio and TV reception. It eliminated AC hum in receivers, and actually increased emission at lower filament voltage. Thus tubes became considerably more efficient, and operating life was greatly extended.

And all this as the result of employing a tiny component—customarily measured in millimeters, or very small fractions of an inch!

It stands to reason that an item of such importance as the cathode must be manufactured from materials that are carefully produced to exacting specifications. Superior Tube Company, leading manufacturers of nickel alloy cathodes, specifies Driver-Harris Alloys for both "active" and "passive" cathode base metals. "Active" materials, producing a high level of electron emission, are D-H Alloys 399, 599 and 799; "passive" materials, employed when freedom from grid back-emission is necessary, are D-H Alloys 499 and 999. All are produced free from oxides, and with extreme accuracy as to dimensions, temper and purity. The commercial grade of pure nickel does not meet specifications.

A consideration of major importance is *surface*. The surface of materials used for cathodes must possess sufficient "tooth" to enable coatings of chemical emitters (such as Barium-Strontium Oxide) to adhere successfully—without cracking or spalling. Driver-Harris furnishes the precise type of surface required.

Here is but another example of the tremendous role played by D-H Alloys thruout industry—and the ability of Driver-Harris to produce *special alloys for special purposes.*

Whatever *your* particular alloy problem, let us have your specifications. We'll gladly put our specialized knowledge, and the skills acquired from fifty years of alloy manufacturing experience, at your disposal . . . make recommendations based upon your specific needs.

FIFTIETH ANNIVERSARY

Manufacturers of world-famous Nichrome* and over 80 other alloys for the electronic, electrical and heat-treating industries

Driver-Harris Company

HARRISON, NEW JERSEY

BRANCHES: Chicago, Detroit, Cleveland, Los Angeles, San Francisco

*T.M. Reg. U. S. Pat. Off.

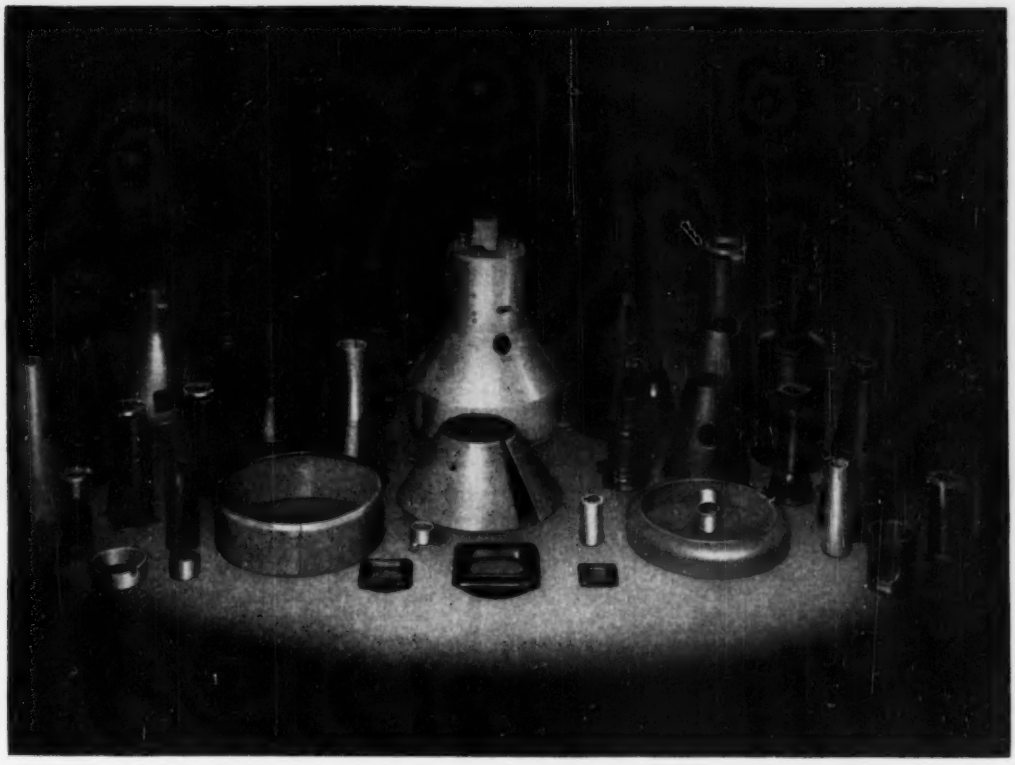

Designed for Application
MU METAL SHIELDS

The James Millen Mfg. Co. Inc. has for many years specialized in the production of magnetic metal cathode ray tube shields for the entire electronics industry, supplying magnetic metal shields to manufacturing companies, laboratories and research organizations. Stock shields are immediately available for all of the more popular sizes and types of cathode ray tubes as well as bezels for 2", 3" and 5" size tubes.

Many production problems, however, make desirable special shields designed in conjunction with the specialized requirement of the basic apparatus. Herewith, are illustrated a number of such custom built shields. Our custom design and fabrication department is at the service of our customers for the development and manufacture of magnetic metal shields of either nicaloi or mumetal for such specialized applications.

Millen magnetic metal shields are illustrated and described in our Laboratory Equipment catalogue, a copy of which will be mailed upon request.

JAMES MILLEN MFG. CO., INC.
MAIN OFFICE AND FACTORY
MALDEN, MASSACHUSETTS, U.S.A.

MYCALEX

MINIATURE TUBE SOCKETS

7-PIN and 9-PIN . . . and SUBMINIATURES

Premium Insulation Priced Competitively

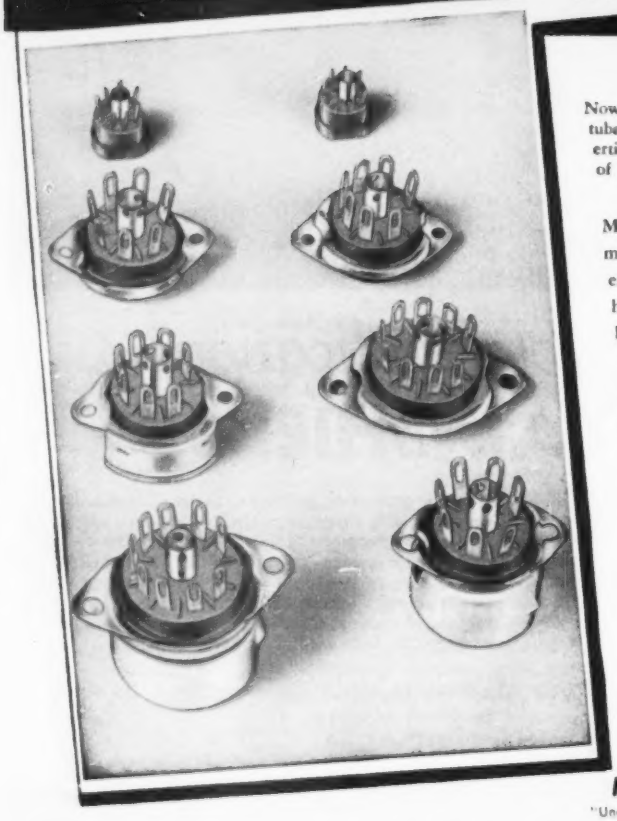

Now MYCALEX offers both 7-pin and 9-pin miniature tube sockets . . . with superior low loss insulating properties, at prices that offer ceramic quality for the cost of phenolics.

MYCALEX miniature tube sockets are injection molded with precision that affords uniformity and extremely close tolerances. MYCALEX insulation has high dielectric strength, very low dielectric loss, high arc resistance and great dimensional stability.

Produced in two grades: MYCALEX 410 conforms to Grade L-4 specifications, having a loss factor of only .015 at 1 MC. It is priced comparably with mica filled phenolics.

MYCALEX 410X is for applications where low cost of parts is vital. It has a loss factor only one fourth that of "everyday" quality insulating materials, and a cost no greater.

Prices gladly quoted on your specific requirements. Samples and data sheets by return mail. Our engineers will cooperate in solving your problems of design and cost.

Mycalex Tube Socket Corporation
"Under Exclusive License of Mycalex Corporation of America"
30 Rockefeller Plaza, New York 20, N. Y.

SINCE 1919 MYCALEX THE INSULATOR TRADE MARK REG U.S. PAT. OFF.

MYCALEX CORP. OF AMERICA

"Owners of 'MYCALEX' Patents"

Executive Offices: 30 Rockefeller Plaza, New York 20, N. Y. Plant and General Offices: Clifton, N. J.

Specify G-E THYRATRONS!

More General Electric thyratron tubes are built and sold than any other make. Here is *leadership* . . . a signpost for the designer of motor-control circuits, pointing to where experience and proved tube quality are waiting!

Choice of types, too, is virtually unrestricted. In the wide range of G-E thyratrons will be found the right tube —small or large, ideal in its design characteristics—for *your* equipment.

Three popular G-E thyratrons are shown here. Each has its special area of application. The GL-3C23 is a gas-and-mercury-vapor tube for motor field control, where inductive loads are heavy. The GL-5544 and GL-5545 are gas-filled tubes especially suited to armature-control work, which involves a higher current—these thyratrons having a charge of inert gas twice that of less modern types, to offset any absorption.

Long, cost-saving life, from features like the higher gas charge of the GL-5544 and GL-5545, gives *extra tube value.* Let General Electric tube engineers work with you in choosing thyratrons that will accent your equipment's economy, help assure its reliability, extend its performance span! Phone your nearby G-E electronics office, or wire or write *Electronics Department, General Electric Company, Schenectady 5, New York.*

Available now...new G-E tube socket (101J328) that resists the heat produced in heavy-duty service. Made of asbestos-filled phenolic material, with special high-temperature-alloy spring contacts that won't lose their elasticity, and an open design allowing generous air circulation. Universal type: takes both the medium 4-pin base used in the GL-3C23, and the super-jumbo base used in the GL-5544 and GL-5545. Mounts either above or beneath a panel.

	GL-3C23	GL-5544	GL-5545
Filament voltage	2.5 v	2.5 v	2.5 v
Filament current	7 amp	12 amp	21 amp
Peak anode voltage, forward and inverse	1,250 v	1,500 v	1,500 v
Peak cathode current	6 amp	40 amp	80 amp
Avg cathode current	1.5 amp	3.2 amp	6.4 amp

GENERAL ELECTRIC

160-J37

ARE THESE GATES '50 DECADE PRODUCTS MAKING MONEY FOR YOU?







GATES
RADIO COMPANY
QUINCY, ILLINOIS, U. S. A.











1. 52-CS Studiocette Speech Console.
2. BC-1F Air-conditioned 1KW Broadcast Transmitter.
3. SA-50 Dual Channel Speech Console.
4. Gates Antenna Coupling Equipment.
5. Typical 4-Tower Centralized Phasing Cabinet.
6. HF5-10 High Frequency Phone and Telegraph Transmitter.
7. SA-40 Single Channel Speech Console on CB4 Control Desk.
8. GY-48 Complete 250-watt Radio Broadcasting Station.
9. 50-watt Telephone and Telegraph Communications Transmitter.
10. BC-5B 5KW Transmitter with Phasor.
11. HF-15 15,000-watt Telegraph Transmitter.

→ Quality PLUS ··· makes GATES ··· a MUST →

YOUR FUTURE REQUIREMENTS

IN TOROIDAL COILS and FILTERS

OUR PROBLEM .. TODAY!

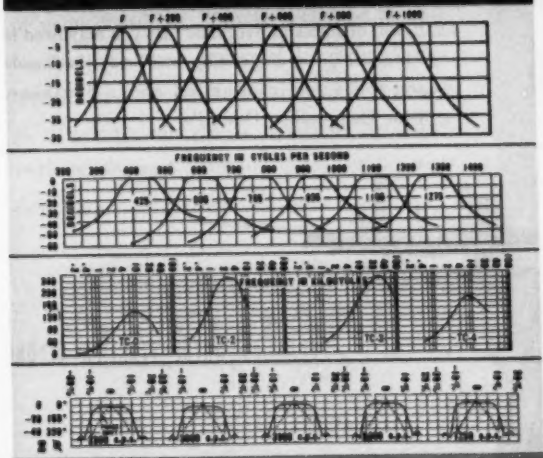

We do not lay claim to any special powers of prognostication, but we can compare ourselves to the seasoned hunter or veteran sailor in their ability to sense the way the wind is blowing. By maintaining constant vigil of the Horizon in our Industry, we strive to be well prepared to meet the ever changing requirements for high quality filters. In following this policy we have been able to give you 'Yes' or 'No' answers on the spot to your queries of 'is this practical' or 'can this be done?' If it can be done, we have probably tried it. If it cannot be done we are still trying to do it. This has obviated unnecessary expenditure of our customers' time and money, and has helped expedite the development of new equipment by eliminating the several blind alleys that can be so costly. In these times, especially, the continued application of foresight, ingenuity and new ideas, as well as the constant expansion of production facilities, will be the key note of our 'Burnell Customer Service.'

Exclusive Manufacturers of Communications Network Components

Burnell & Company
YONKERS 2, NEW YORK

Will Corrosion Resistance + "X"

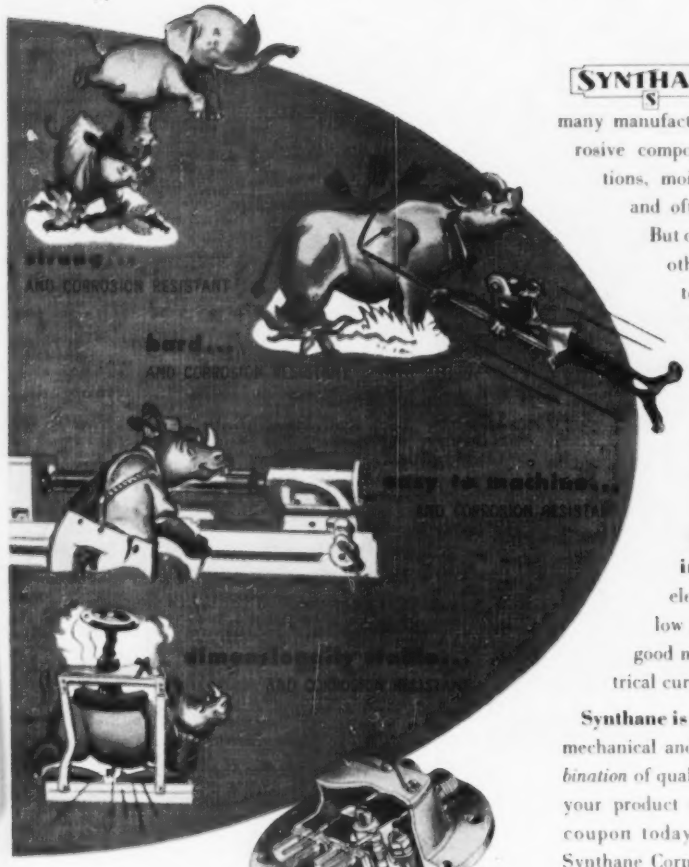

SYNTHANE plastic laminates have helped many manufacturers solve corrosion problems. Corrosive compounds, gases, various water compositions, moisture, oils, and gasoline have little, and often no, adverse effect upon Synthane. But corrosion resistance is only one of many other Synthane advantages abbreviated to the "X" above.

Synthane is also strong. Good tensile, flexural and compressive strengths, together with impact fatigue resistance and light weight, are other Synthane characteristics. Manufacturers may choose Synthane for one or more of these reasons.

Synthane is an excellent electrical insulator. Properties such as high dielectric strength, low power factor and low dielectric constant make Synthane a good material for any application where electrical currents must be held in check.

Synthane is a material for all industry. Chemical, mechanical and electrical characteristics form a *combination* of qualities in Synthane that you may need in your product or process. Clip and mail the handy coupon today for information about Synthane. Synthane Corporation, Oaks, Pa.

SYNTHANE

AT WORK IN INDUSTRY

Minneapolis-Honeywell Regulator Company selected Synthane for the Tank Unit components of their electronic Fuel Gage equipment because of Synthane's corrosion resistance, good dielectric properties and dimensional stability. M-H Fuel Gages are standard in many USAF aircraft such as the famed Boeing B-50, one of which (the Lucky Lady) flew non-stop around the world last year.

PLASTICS WHERE PLASTICS BELONG

DESIGN — MATERIALS — FABRICATION — SHEETS — RODS — TUBES

Help You Solve a Problem?

The "X" in our headline does not represent an unknown factor. It does represent a **combination** of many well known, use-proved characteristics.

Several parts made from Synthane are illustrated at the right. In each case the user chose Synthane for one or two primary properties combined with many other properties desirable for good performance. That's the big advantage in using Synthane. You get essential characteristics plus many extra and desirable characteristics in *combination*. We will work with you to determine the specific grade of Synthane required to meet your job needs, or we may develop a special grade for you.

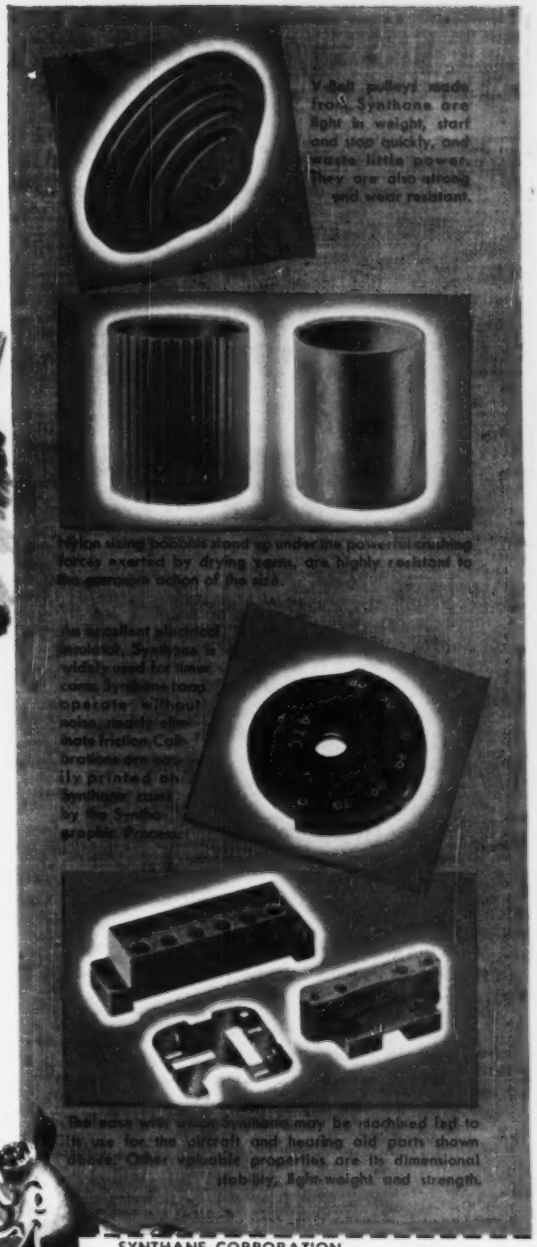

V-Belt pulleys made from Synthane are light in weight, start and stop quickly, and waste little power. They are also strong and wear resistant.

Nylon sizing products stand up under the powerful crushing forces exerted by drying yarns, are highly resistant to the corrosive action of the size.

An excellent electrical insulator, Synthane is widely used for liner cams. Synthane cams operate without noise, nearly eliminate friction. Calibrations are easily printed on Synthane cams by the Synthographic Process.

The base with which Synthane may be machined [illegible] to fit use for the aircraft and hearing aid parts shown above. Other valuable properties are its dimensional stability, light weight and strength.

SYNTHANE

WHERE SYNTHANE BELONGS

MOLDED-MACERATED — MOLDED-LAMINATED

SYNTHANE CORPORATION
6 River Road, Oaks, Pa.

Gentlemen:
Please send me, without obligation, information on Synthane sheets, rods, tubes, and fabricated parts.

*Name*_____

*Company*_____

*Address*_____

*City*_____ *Zone*_____ *State*_____

**Free catalogs for companies in United States and Canada.*

NEW INDICATOR ION TRAP

Now in all Rauland Tubes

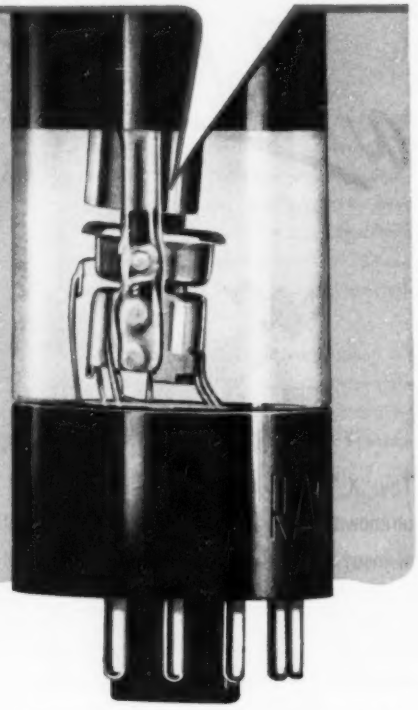

The response to Rauland's new Indicator Ion Trap, after its introduction in the 12LP4-A, has been so enthusiastic that this feature has now been incorporated in all Rauland tubes – as a standard feature of the new Rauland Tilted Offset Gun.

In the field or on the assembly line, this new Indicator Ion Trap reduces Ion Trap Magnet adjustment time to a matter of seconds, eliminates mirrors and guesswork, and assures accuracy of magnet adjustment. It can increase profits for every service man and service dealer – and at the same time assure better customer satisfaction.

A bright green glow on the anode of the picture tube signals when adjustment is incorrect. Correct adjustment is made instantly, by moving the magnet until the glow is extinguished or reduced to minimum.

Only Rauland offers this advanced feature – one of a half-dozen important post-war developments from Rauland.

RAULAND

The first to introduce commercially these popular features:

Tilted Offset Gun

Indicator Ion Trap

Luxide (Black) Screen

Reflection-Proof Screen

Aluminized Tube

•

THE RAULAND CORPORATION

Perfection Through Research

4245 N. KNOX AVENUE • CHICAGO 41, ILLINOIS

Something New **HERE'S** *Fast, Accurate* **LAB OR PRODUCTION** *Testing!*



NEW OVAL SELECTOR SWITCHES

Several new oval rotary selector switches are described in Bulletin L13 just issued by the Shallcross Manufacturing Co., Collingdale, Pa. Six basic plates and three rotor types produce switches having from one to three poles per deck or gang and with other desired mechanical and electrical details. As many as 18, 9 or 6 positions may be obtained in single-, double-, or triple-pole types respectively. These may be single-, double-, or triple-pole decks exclusively or a combination of different types.

VERTICAL STYLE PRECISION RESISTORS FOR JAN USES

Improved vertical style precision wire-wound resistors for use where mounting requirements make it desirable to have both terminals at the same end of the resistor have been introduced by the Shallcross Manufacturing Co., Collingdale, Pa. These units provide a longer leakage path from the mounting screws to the terminals. Known as Shallcross Types BX120, BX140, and BX160, they are designed to meet JAN requirements for styles RB40B, RB41B and RB42B respectively. For commercial uses, the resistors carry somewhat higher ratings than for JAN applications. Wire leads instead of terminals can be furnished if desired. Complete details will gladly be sent on request to the manufacturer.



FLAT, METAL-ENCASED WIRE-WOUND RESISTORS

Flat, metal-encased, Type 265A wire-wound power resistors introduced by the Shallcross Manufacturing Company, Collingdale, Penna. are space wound, have mica insulation, and are encased in aluminum for mounting flat against a metal chassis. At 175° C. continuous use they are conservatively rated for 7½ watts in still air and 15 watts when mounted on a metal chassis. Write for Bulletin 122.

ADV

A QUICK CHECK OF LOW RESISTANCE CONNECTIONS, BONDS, CONTACTS, etc.

Shallcross low resistance test sets greatly facilitate comparison tests between 2 and 800,000 micro-ohms. Their uses range from testing the electrical conductivity of bonds, welds and seals to contacts, filaments, armatures or for making any measurement under 1 ohm. Suitable units are available for either field, laboratory or production line use. Write for Bulletin LRT-1.

KELVIN plus WHEATSTONE RANGES IN ONE HANDY BRIDGE

Why pay for two instruments when one will do *both* jobs? Providing both Kelvin and Wheatstone ranges from 0.0001 ohm to 11.11 megohms, this Shallcross No. 638-R combined bridge is highly accurate and outstandingly convenient. Priced at only a little more than a single bridge with a limited range, it is a typical example of Shallcross instrument efficiency and economy.

DECADE RESISTANCE BOXES TO MATCH YOUR NEED . . . exactly

Over 40 Shallcross standard Resistance Boxes provide the widest assortment available today. Types range from 1 to 7 dials from 0.01 ohm to 111 megohms and are available in styles, sizes and prices for practically any laboratory or production testing need. Write for Bulletin.

SHALLCROSS

SHALLCROSS MANUFACTURING COMPANY

Collingdale • Penna.

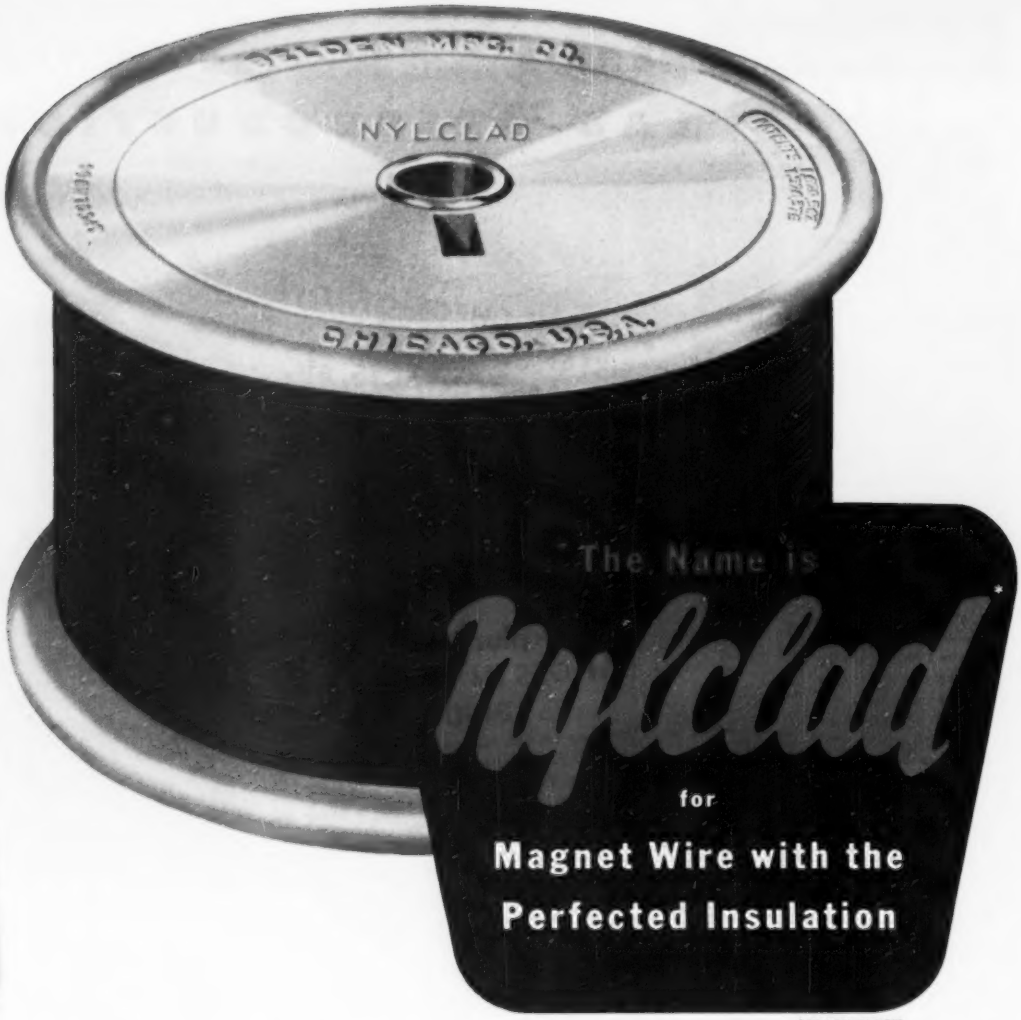

*TRADE MARK

Combines all the Desirable Properties of Formvar and Nylon Coatings

Years of development work have produced this new and superior magnet wire insulation. Belden Nylclad* Magnet Wire combines the desirable properties of Formvar and Nylon types. Its tough, durable coating eliminates the need for paper or textile-covered wires (in many applications) and reduces winding space requirements. Nylclad* provides increased toughness, increased solvent resistance, and resistance to softening under heat; it is not subject to solvent crazing. Nylclad* means improved windability — more compact coils — many over-all plus values at *no* increase in price.

It will pay you to investigate Nylclad* Magnet Wire — another Belden development that makes for lower over-all costs. Write, today, for test data.

Belden

MAGNET WIRE

Belden Manufacturing Co., 4625 West Van Buren Street, Chicago, Illinois

From WFAA-TV, More Proven Performance of the Eimac 3X2500A3

Station **WFAA**

RADIO SERVICE OF THE DALLAS MORNING NEWS

September 28, 1950

Eitel-McCullough, Inc.
San Bruno, California

Gentlemen:

I thought you might be interested in knowing that we are using EIMAC 3X2500A3 tubes in the finals of our high channel TV transmitter and we are very happy with their performance. In fact, we have yet to experience a tube failure since we went on the air. Tube cost is low and maintenance problems are eliminated when using this dependable air cooled tube.

It is a pleasure for me to recommend your fine product.

Sincerely yours,
Carlos L. Dodd
Carlos L. Dodd,
Chief Engineer
WFAA-TV

The Eimac 3X2500A3 is one of the outstanding vacuum tube developments made during recent years. Consistent performance, long life, and low cost account for its filling the key socket positions in many important recently designed equipments.

The 3X2500A3 is a compact, air-cooled triode. Its coaxial construction results in minimum lead inductance, excellent circuit isolation, and convenience of use with coaxial plate and filament tank circuits. For AM service it is FCC rated for 5000 watts per tube as a high-level modulated amplifier. It has comparatively low plate-resistance, high transconductance, and will provide effective performance over a wide range of plate voltages at frequencies extending well into the VHF.

Reports from many engineers, like Mr. Dodd of WFAA-TV, confirm the outstanding transmitter performance, simplified maintenance, and low tube replacement cost made possible through the use of the Eimac 3X2500A3. Consider this unequalled triode for your applications . . . complete data are free for the asking.

Eimac 3X2500A3

GENERAL CHARACTERISTICS

ELECTRICAL	
Filament: Thoriated tungsten	
Voltage	7.5 volts
Current	48 amperes
Maximum starting current	100 amperes
Amplification Factor (Average)	20
Direct Interelectrode Capacitances (Average)	
Grid-Plate	20 uufd
Grid-Filament	48 uufd
Plate-Filament	1.2 uufd
Transconductance (i_b = 830 ma., E_b = 3000 v.)	20,000 umhos
MECHANICAL	
Cooling	Forced air
Maximum Overall Dimensions:	
Length	9.0 inches
Diameter	4.25 inches
Net Weight	5.8 pounds

RADIO FREQUENCY POWER AMPLIFIER
Ground-Grid Circuit
Class-C FM Telephony
TYPICAL OPERATION (110 Mc., per tube)

D-C Plate Voltage	3700	4000	volts
D-C Grid Voltage	—450	—550	volts
D-C Plate Current	1.8	1.85	amps.
D-C Grid Current	225	275	ma.
Driving Power (Approx.)	1600	1900	watts
Useful Power Output	6850	7500	watts

*COMPLETE DATA AVAILABLE FREE



EITEL-McCULLOUGH, INC.
SAN BRUNO, CALIFORNIA

Export Agents: Frazar & Hansen, 301 Clay St., San Francisco, California

Follow the Leaders to **Eimac** TUBES The Power for A-F

the 3X2500A3 is another Eimac contribution to electronic progress.

269

specify Sorensen

DC POWER SUPPLYS

Three *new* regulated DC units – 360B, 520B, 560B, – supplement Sorensen's dependable line of DC Power Supplys. As always, Sorensen combines the highest quality components with consistently fine workmanship. This means rugged construction and trouble-free operation, yet Sorensen prices are always reasonable!

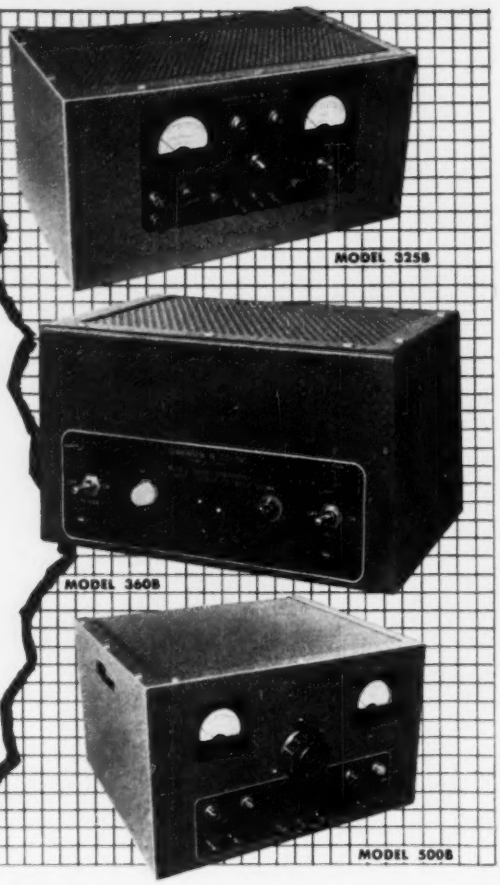

DC POWER SUPPLY SPECIFICATIONS

MODEL No.	325B	360B	520B	560B	500B	1000B
Output voltage	0 – 325	175 – 360	200 – 500	0 – 500	0 – 500	200 – 1000
Output current	0 – 125 Ma.	0 – 120 Ma.	0 – 200 Ma.	0 – 200 Ma.	0 – 300 Ma.	0 – 500 Ma.
Output voltage, bias	0 – 150	.....	.....	0 – 150	0 – 150	.....
Output current, bias	0 – 5 Ma.	.....	.....	0 – 5 Ma.	0 – 5 Ma.	.....
Low AC voltage (center-tapped, unregulated)	6.3 at 10 amp.	6.3 at 10 amp.	6.3 at 10 amp.	6.3 at 10 amp.	6.3 at 10 amp.	.....
Ripple	10 mv	10 mv	10 mv	10 mv	10 mv	20 mv

Regulation accuracy: ±0.5%.
Input: 105 – 125 volts AC, 50-60 cycles, single phase.
Units are normally self-contained. All can be provided with a front panel for rack mounting.
Models 325B, 500B, and 1000B are metered.

Write for Complete Literature

For regulated *low voltage supplys* investigate Sorensen's line of NOBATRONS.

POWER controlled converted

Sorensen and company, inc.
375 FAIRFIELD AVE. • STAMFORD, CONN.

MANUFACTURERS OF AC LINE REGULATORS, 60 AND 400 CYCLES; REGULATED DC POWER SOURCES; ELECTRONIC INVERTORS; VOLTAGE REFERENCE STANDARDS; CUSTOM BUILT TRANSFORMERS; SATURABLE CORE REACTORS

Atmosphere **unlimited . . .**

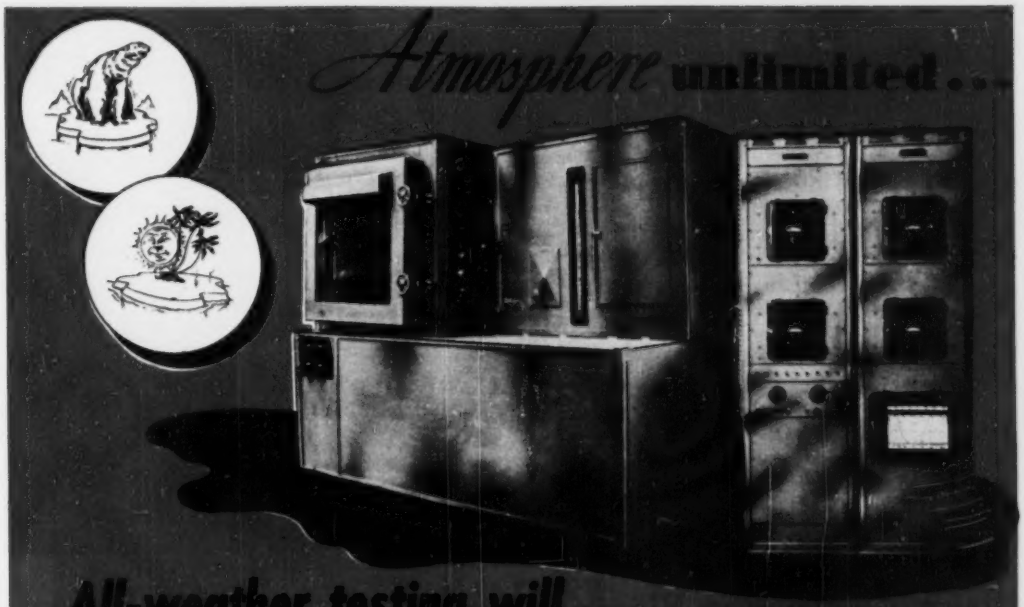

All-weather testing will

PROVE YOUR PRODUCT

Assure maximum value from each research dollar invested and from every hour of human effort expended in your development or manufacturing program by relying on Northern-Zaleski test chambers for complete, accurate test data—the soundest foundation on which to base your operation.

Northern-Zaleski atmospheric test chambers (with fully automatic cycling and recording systems, if desired) are your assurance of complete dependability and highest precision in meeting all test requirements. Temperature ranges of —150°F. to +200°F., humidity ranges of 10% to 98%, and simulated altitude ranges of 0 to 100,000 feet are available in standard chambers of from 3 to 800 cubic feet. Field construction to 25,000 cubic feet.

☐ REJECTED

TESTING *makes the difference!*

☑ ACCEPTED

- Laboratory facilities to run JAN spec tests
- Research and development services available
- Test chamber repair-rebuilding-maintenance

Northern-Zaleski, Limited

PRATT OVAL, GLEN COVE, LONG ISLAND, N. Y.

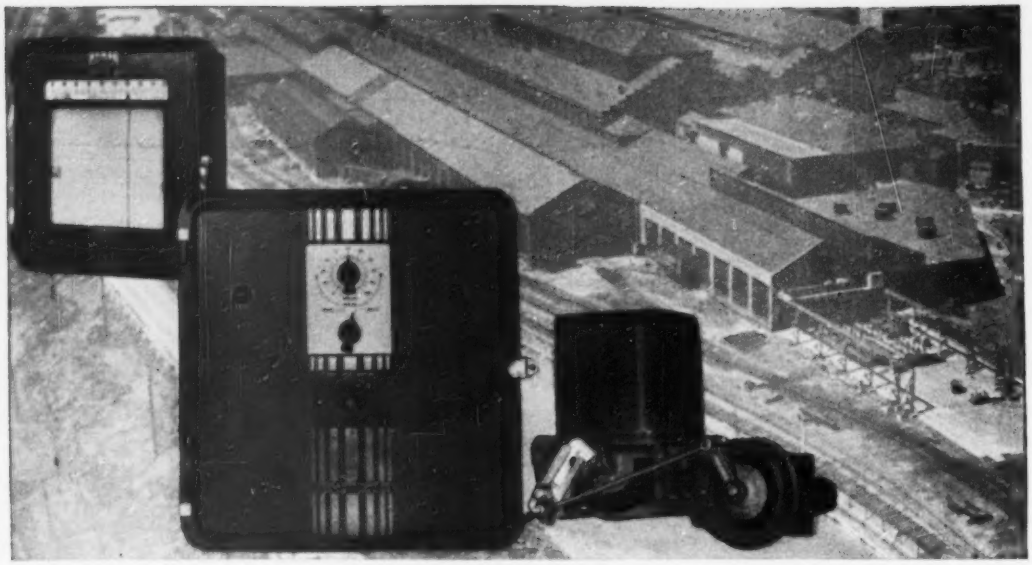

Major Advance in Electric Control Increases Production From Industrial Operations

With production demands reaching toward fresh all-time highs, this new P.A.T.'50 Control comes at the ideal time to help thousands of firms increase the output of their industrial furnaces. Here's why:

This Control has something that's brand new. It acts on the *speed* of swings in furnace load, as well as on their size and permanence. Thus, if temperature changes gently, it is gently nudged back into line. But if it starts off briskly—as when the furnace door is opened—P.A.T.'50 reacts briskly. The faster the change, the further P.A.T.'50 moves the fuel valve. Then, at the instant this action begins to head off the change, the Control starts backing away. By putting on the brakes it brings temperature back in line smoothly, rapidly.

This "Rate Action" increases production because it reduces the length of time a furnace is off temperature. It means more heats per week.

P.A.T.'50 is the Only electric positioning control with Rate Action. It's a unique L&N contribution to automatic regulation.

Also, Proportioning and Reset Actions are more responsive than before. These two components have always been vital to automatic control, and of course continue so. They stop the normal, every-day temperature swings which are started by changes in the size and permanence of the furnace load.

When we gave P.A.T. its third component of rate action—and introduced it in this '50 model—we were able also to increase the sensitivity and range of adjustment of proportioning and reset components. The resulting improvement in control action shows up at all times, but especially when temperature is being stubborn—trying to edge away from the control point, or to level off incorrectly. Even without rate action, P.A.T.'50 would do a better-than-ever job. But with rate action, results are far superior to any previous electric control.

The News is in the Control Unit. Everything new in P.A.T.'50 is in the Control Unit—the device in center of above illustration which is usually mounted below the Speedomax or Micromax Recording Controller, and which links that instrument to the fuel-valve-driving mechanism. In line with our policy of making improvements readily available to users of our equipment, earlier installations of P.A.T. Control can be converted to P.A.T.'50 by replacing the Unit and making slight changes in the Controller. The new Unit is fully electronic—has no moving parts except two hermetically-sealed relays.

For complete details, contact our nearest office, or write us at 4979 Stenton Ave., Philadelphia 44, Pa.

MEASURING INSTRUMENTS · TELEMETERS · AUTOMATIC CONTROLS · HEAT-TREATING FURNACES

LEEDS & NORTHRUP CO.

they
may
look
alike,
but:
there
is
only
one
C-D

COMPACT!
DEPENDABLE!

Best . . . by Field Test

Type BBR
MINIATURE
ELECTROLYTIC
CAPACITORS
anode risers connected
directly to outer leads

. . . new construction eliminates shorts to the container!

Another C-D first! Positive lead, of round aluminum wire, is clamped to special aluminum center piece providing continuous metallic contact from foil to terminal lead. No foreign material sandwiched between inner and outer leads—a consistent cause of floating opens and high resistance contacts. Also eliminates shorts in container. Other features are:

High-purity aluminum electrodes—low electrical leakage! Cellulose-acetate wrap prevents "contamination" during assembly! Electrolyte centrifuged into container—fills section completely; provides reserve fluid for many years' use! Rubber bakelite insulation washer permits perfect seal! Stable electrolyte—a C-D exclusive—permits long shelf and operating life!

For further information on these and other C-D electrolytics, write for catalog. CORNELL-DUBILIER ELECTRIC CORPORATION, Dept. K11-0 South Plainfield, New Jersey. Other plants in New Bedford, Brookline and Worcester, Mass.; Providence, R. I.; Indianapolis, Ind., and subsidiary, The Radiart Corp., Cleveland, Ohio.

CONSISTENTLY DEPENDABLE
CORNELL-DUBILIER
CAPACITORS · VIBRATORS · ANTENNAS · CONVERTERS

Stamping a New "Buy Sign" on the minds of 14,000,000 Buyers

THE SATURDAY EVENING **POST**

. . . this new campaign in means more business for manufacturers who assemble their products with

AMERICAN PHILLIPS SCREWS

For years, American has been a "PHILLIPS-HEADquarters" . . . engineering these modern fasteners into all types of products.

Today, American joins in this new campaign in which millions of users of manufactured products are being told to look for the clue of extra quality...

"The Phillips Cross-Recess Marks the Spot . . ."

A symbol that quality is built into a product with the modern Phillips fastener.

American, with its new plant and equipment at Willimantic, Connecticut, is in a stronger position than ever before to meet the ever growing demand for Phillips fasteners. In addition, the facilities at its Norristown, Pennsylvania, plant and the large warehouse stocks maintained in Chicago have been established to help service distributors and users of American Phillips Cross-Recessed-Head Screws. Write, telling us how American can be of help to you!



AMERICAN SCREW COMPANY

Plants at Willimantic, Conn., and Norristown, Pa.

Warehouses at: Chicago 11: 589 E. Illinois St. Detroit 2: 502 Stephenson Bldg.

Can you find the clue...

...to quality?
✕ marks the spot...

***Yes!a* PHILLIPS SCREW**

You don't have to be a super-sleuth to detect the sign of quality on a modern product. Just look for Phillips Cross-Recessed-Head Screws. Used on everything from refrigerators to cattle trailers, these famous screws make possible strain-free tightness at all fastening points. They're your assurance that a product is well built.

PHILLIPS *Cross-Recessed-Head* SCREWS *on sale at hardware, automotive and mill supply outlets.*

FOLLOW THE LEADERS

BUY WISE...

BUY THE ORIGINALS...

BUY HYTRON TV FIRSTS

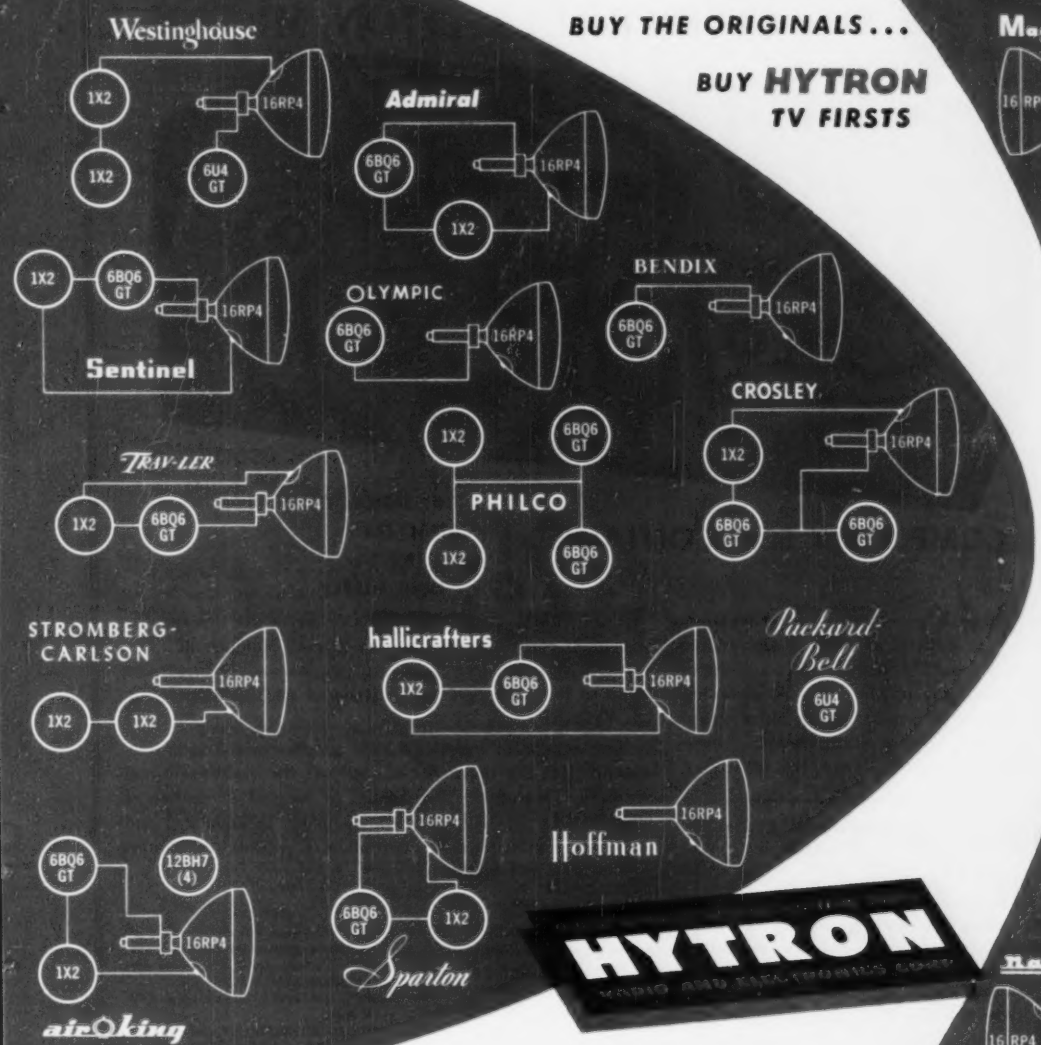



Ask for the original Hytron TV firsts: Hytron **1X2** compact, high-voltage TV rectifier. Hytron **6BQ6GT, 25BQ6GT** extra-performance deflection amplifiers. Hytron **6U4GT** high-perveance damping diode. Hytron **12BH7** twin-triode sweep amplifier with superior efficiency. Hytron **16RP4** original rectangular TV picture tube.

HYTRON RADIO TUBES

MAIN OFFICE: SALEM, MASSACHUSETTS

Intermodulation can be measured quickly and accurately with MEASUREMENTS' new, portable MODEL 31

INTERMODULATION METER

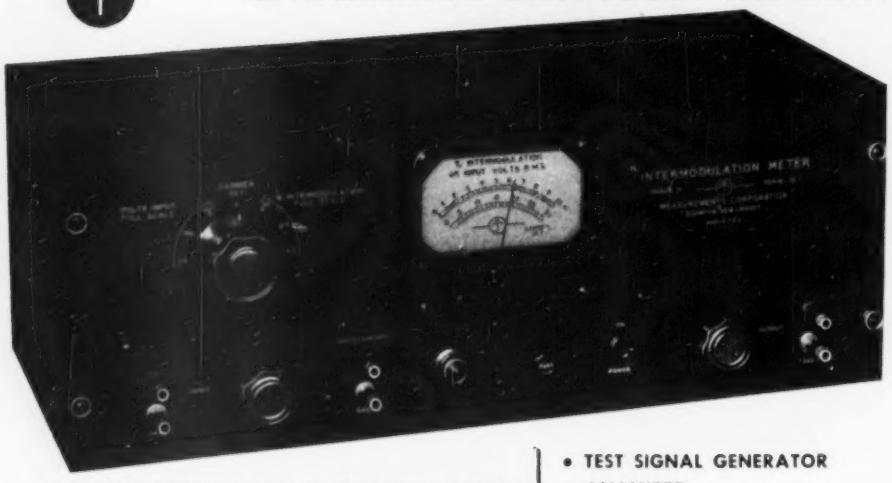

COMPLETELY SELF-CONTAINED

- TEST SIGNAL GENERATOR
- ANALYZER
- VOLTMETER
- POWER SUPPLY

To insure peak performance from all audio systems; for correct adjustment and maintenance of AM and FM receivers and transmitters; checking linearity of film and disc recordings and reproductions; checking phonograph pickups and recording styli; checking record matrices; adjusting bias in tape recordings, etc.

MEASUREMENTS CORPORATION meets the demand for compact, easily-operated intermodulation equipment! The MODEL 31 is moderately priced, yet extremely accurate and built to the same rigid specifications of all "LABORATORY STANDARDS".

One section of the MODEL 31 supplies mixed audio frequencies to the apparatus under test; the resultant signal from the apparatus is then applied to the analyzer section of the MODEL 31 to be filtered, amplified, demodulated and metered. The meter is direct-reading in percentage of intermodulation and input volts.

Specifications:

GENERATOR

LOW FREQUENCY: 60 cycles.
HIGH FREQUENCY: 3000 cycles.
LF/HF VOLTAGE RATIO: Fixed 4:1.
OUTPUT VOLTAGE: 10 v. max. into high impedance or +5 DBM matched to 600 ohms.
OUTPUT IMPEDANCE: 2000 ohms.
RESIDUAL INTERMODULATION: 0.2% max.

ANALYZER

INPUT VOLTAGE: Full scale ranges of 3, 10 and 30 volts RMS. Less than one volt of mixed signal is sufficient for operation.
INPUT IMPEDANCE: Greater than 400 K ohms.
INTERMODULATION: Full scale ranges of 3, 10 and 30%.
ACCURACY: ±10% of full scale.
OSCILLOSCOPE connection at meter.

Power supply: 117 volts, 50/60 cycles, 30 watts. Dimensions: 8" high x 19" wide x 9" deep. May be mounted in standard 7" relay rack panel space. Weight: 16 lbs.

MODEL 30 INTERMODULATION METER

This model has a test generator providing, a low frequency range of 40, 70 and 100 cycles, a high frequency range of 2000, 7000 and 12,000 cycles, either separate or mixed in a 1/1 or 4/1 ratio.

The analyzer will operate from 20 cycles to 200 cycles and from 2000 cycles to 20,000 cycles.

A direct-reading meter measures intermodulation percentages from 0.1% to 30%; test generator output voltages from .01 to 100 v. (−30 to +20 DBM); analyzer input voltages from .0001 to 100 v. (−70 to +40 DBM).

Detailed circular on request

MEASUREMENTS CORPORATION

BOONTON NEW JERSEY

REGENERATION?

RADIATION?

ERIE TYPE 325

High Frequency By-Pass Capacitor Will Help Solve Your Problem

- **LOW INDUCTANCE**
- **UNIFORM INDUCTANCE FOR RESONANCE BY-PASSING**
- **RUGGED HIGH TERMINAL FOR TIE-POINT**
- **FULLY SHIELDED**

One solution to control of regeneration and radiation in TV sets lies in better by-passing . . . and Erie Style 325 Stand-Off Ceramicon provides the solution in concrete form. This ceramic capacitor is made especially for high frequency decoupling and offers an outstanding combination of features never before offered in the low-price field.

A by-pass to the ground is provided through the shortest possible path, in a completely sealed metal case. Full advantage is taken of the concentric cylindrical electrode configuration in maintaining this short path, resulting in extremely low series inductance and effective v.h.f. by-pass.

Push-on clip facilitates high speed assembly . . . or shell may be soldered directly into a hole in the chassis. Post terminal provides a sturdy tie-point for several connections, at tube socket terminal height. The capacitor possesses unusual mechanical ruggedness.

Write for detailed information and samples.

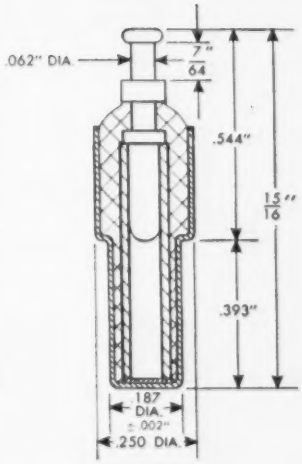

PATENT APPLIED FOR

Electronics Division

ERIE RESISTOR CORP., ERIE, PA.

LONDON, ENGLAND . . . TORONTO, CANADA

ELECTRONICS

Designers

ELECTRONIC COMPONENTS

A HIGHEST QUALITY LINE

—constantly improved and added to—

for your equipment designs

APPARATUS DEPARTMENT

- Meters and instruments
- Capacitors
- Transformers
- Pulse-forming networks
- Delay line
- Reactors
- Thyrite
- Inductrols
- Voltage stabilizers
- Fractional hp motors
- Timers
- Control switches
- Selsyns
- Relays
- Amplidynes
- Amplistats
- Terminal boards
- Glass bushings
- Thermistors
- Dynamotors

ELECTRONICS DEPARTMENT

- Tubes
- Television components
- Phono pickups
- Speakers
- Quartz crystal units
- Germanium diodes

When you're building any of thousands of complex industrial and military electronic devices, reliable components are a must.

To give you, the designers of these devices, the utmost in reliability, General Electric is constantly at work improving and redesigning in its ever growing line of electronic components.

The list at left only partially covers the thousands of parts in the complete G-E line. We'll tell you about as many of them as space will permit in these pages from month to month. *Apparatus Department, General Electric Company, Schenectady 5, N. Y.*

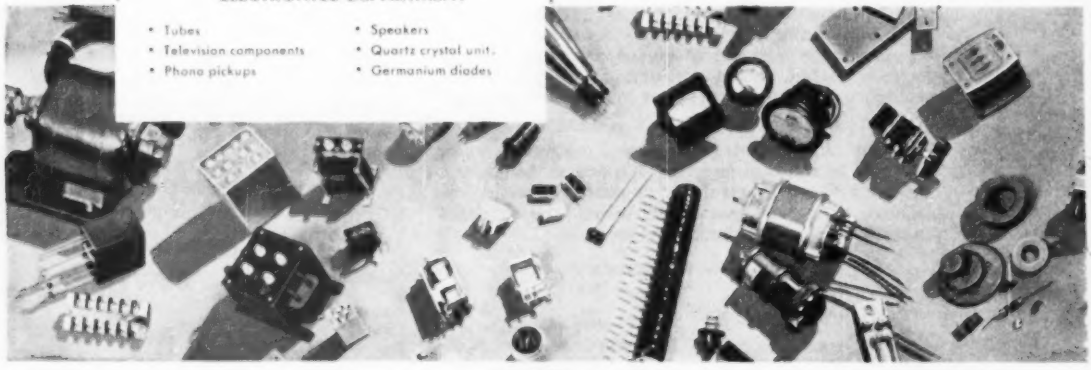

GENERAL ELECTRIC

667-8

Digest

TIMELY HIGHLIGHTS ON G-E COMPONENTS



LINE-VOLTAGE STABILIZERS —get rid of ups and downs!

When you're after a steady 115 volts at the input of your equipment and the line is fluctuating anywhere between 95 and 130, use a G-E voltage stabilizer. These units use a special transformer circuit to provide a stabilized output voltage within ±1% of 115 volts for fixed, unity-power-factor loads. Fast response of G-E stabilizer restores normal output voltage in less than three cycles. 15-, 25- and 50-va stabilizers are small enough to mount on radio or electronic instrument chassis (2 inches high, 9 inches long). Standard ratings up to 5000 va are available in larger sizes. Write for Bulletin GEA-3634.

THYRITE— R varies inversely as E^4

With the unique electrical property of varying inversely in resistance as the fourth power (or even higher) of the applied voltage, Thyrite* resistance material has solved many problems for the design engineer.

Use it with a-c, d-c, or short duration pulses; for such applications as the limiting of voltage surges, stabilization of rectifier output voltages, controlling of voltage-selective circuits, and potentiometer division of voltages.

Thyrite comes in disk form in diameters from 0.25 to 6.00 inches, with or without mounting holes. Smaller sizes are furnished with wire leads. See Bulletin GEA-4138.

*Registered Trade Mark of General Electric Co.



TYPE HMA RELAYS—up to 30 amps, closing

The G-E Type HMA relay is only the size of cigarette package, but it closes at currents up to 30 amperes! HMA relays have self aligning, silver-to-silver contacts; are positive in action, instantaneous in operation. They're available in either back or front connected models. For coil voltages of 6, 12, 24, 32, 48, or 125 d-c; 115 or 230 a-c. Single- or double-break contacts. Bulletin GEA-5457.

General Electric Company, Section A667-8
Apparatus Department, Schenectady 5, N. Y.

Please send me the following bulletins:

Indicate
(V) for reference only
(X) for planning an immediate project

- ☐ GEA-3634 Voltage stabilizers
- ☐ GEA-4138 Thyrite
- ☐ GEA-5457 HMA relays

Name _____

Company _____

Address _____

City _____ State _____

ONLY

BENDIX-SCINTILLA

ELECTRICAL CONNECTORS

SHELL
High strength aluminum alloy . . . High resistance to corrosion . . . with surface finish.

CONTACTS
High current capacity . . . Low voltage drop . . . No additional solder required.

SCINFLEX★ ONE-PIECE INSERT
High dielectric strength . . . High insulation resistance.

offer you this IMPORTANT EXCLUSIVE FEATURE . . .



PLUS ALL THESE OTHER FEATURES

- Moisture-proof
- Radio Quiet
- Single-piece Inserts
- Vibration-proof
- Light Weight
- High Insulation Resistance
- Easy Assembly and Disassembly
- Fewer Parts than any other Connector
- No additional solder required

. . . PRESSURE TIGHT SOCKET CONTACT ARRANGEMENTS!

Outstanding design and fine workmanship, combined with materials that meet the requirements, assure the splendid performance of Bendix-Scintilla "pressurized" electrical connectors. These units include both pin and socket arrangements for *all* sizes of contacts.

★ **SCINFLEX** dielectric material is a new development that assures unequalled insert performance. It is available only in Bendix-Scintilla Electrical Connectors.

Write our Sales Department for detailed information.

BENDIX SCINTILLA

SCINTILLA MAGNETO DIVISION of
SIDNEY, NEW YORK

FACTORY BRANCH OFFICES

Bendix AVIATION CORPORATION

DeJUR makes great little meters . . .

Panel Meters

- Miniature 1½" square
- Waterproof sealed
- Obtainable with Lucite scales and Magnetic Shielding

Larger sizes available
2½" round
2½" square
3½" round
3½" square
4" square
JAN-1-6 and A.S.A. specifications

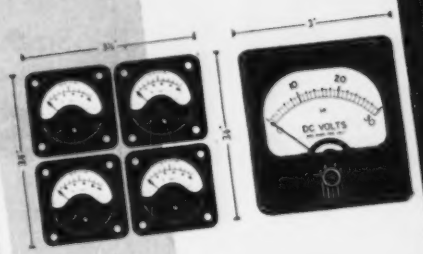

Built to Conform to Forthcoming JAN Spec. for 1½" Meters

POWER Rheostats . . .

NEW ALL METAL CONSTRUCTION
with
ALUMINUM FRAME
ALUMINUM WINDING CORE
Assuring Maximum Heat Dissipation

MODEL 245 — up to 50,000 ohms (25 Watt)
MODEL 241 — up to 75,000 ohms (50 Watt)

These exceptionally high resistances are possible because of new developments in material and design. Built to JAN-R-22 Specifications.

Ceramic models available for economy and where fine precision of all metal parts is not needed.



PRECISION Potentiometers

FEATURES

- Linearity Accuracy ±0.2%
- Resistance Accuracy ±1%
- High Humidity Models JAN-R-19 SPECS.
- Non-Linear Models



Send All Inquiries to Dept. E-1 for Full Information on Our Complete Line

DeJUR USA

DeJUR AMSCO CORPORATION
45-01 NORTHERN BOULEVARD, L. I. C. 1, N. Y.
MANUFACTURERS OF SCIENTIFIC PRECISION EQUIPMENT FOR OVER A QUARTER OF A CENTURY

CONSOLIDATED'S

NEW

- LOW COST
- HIGH QUALITY
- COMPACT DESIGN

Recording OSCILLOGRAPH

A PRECISION RECORDING INSTRUMENT TO MEET YOUR BUDGET

- Choice of 9- or 14-trace capacity
- 10 quick-change record speeds (1/4" to 100" per sec.)
- Easily detachable record magazine (capacity 125 ft. of 5" paper)
- Uses standard Consolidated Series 7-200 Galvanometers
- Automatic record numbering
- Two static reference traces
- Record footage indicator
- Precision timing system (.01- and .10-sec. timing lines)
- Constant-temperature galvanometer block
- Simultaneous viewing and recording
- Choice of a-c (115 v, 60 cycle) or d-c (24-28 v) models
- Compact design (dimensions: 9" x 9½" x 19½", weight: 48½ lbs.)
- 4-point shockmount base (optional)
- Trace identification (optional)

Designed to meet the needs of those who require the utmost in performance, but who must operate on a limited budget, the new Consolidated Recording Oscillograph, Type 5-116, is engineered to the precise standards of the larger Consolidated Oscillographs—yet is drastically lower in price.

Using the widely accepted Consolidated Series 7-200 Galvanometers—which offer a sensitivity and frequency for every job—the 5-116 Oscillograph produces records possessing quality and accuracy equal to those of the finest instruments heretofore available.

Compare the 5-116 with any oscillograph now available. Regardless of the size of your budget, you can't find a better value.

For further information write for Bulletin CEC-1521-X2.



Removable side plates maximum accessibility. Rugged construction maintains accurate alignment of components.

NEW AMPLIFIER A new, low-cost, 4-channel, 3-kc Carrier Amplifier, Consolidated Type 1-118, is now available as a companion to the 5-116 Oscillograph, making a versatile recording system for the static-dynamic measurement of strain, pressure, and acceleration. Frequency range is flat from 0-500 cps. For further information write for Bulletin CEC-1522-X2.

CONSOLIDATED ENGINEERING CORPORATION

Analytical Instruments for Science and Industry

620 NORTH LAKE AVENUE • PASADENA 4, CALIFORNIA

Here's the **ideal** amplifier for control applications

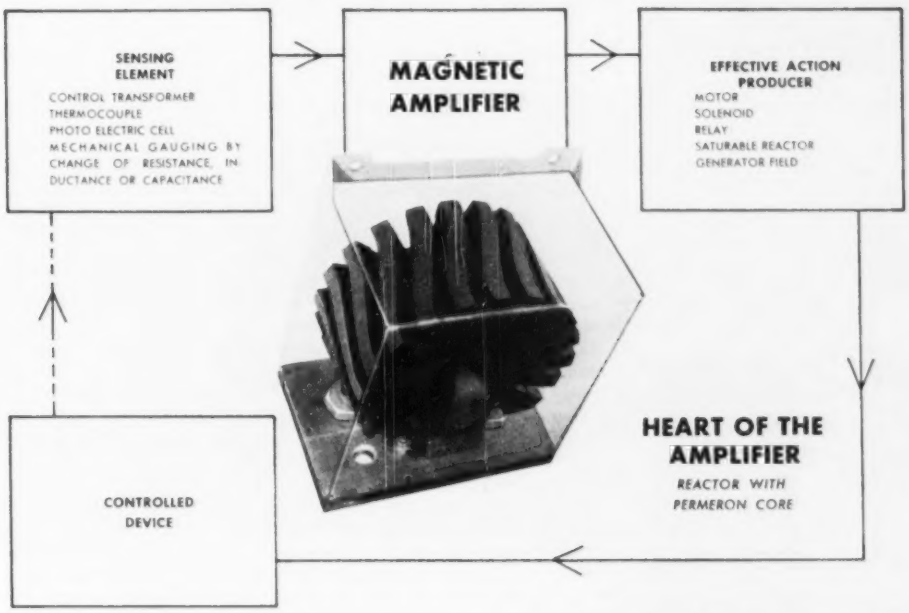

Why? Well, for one thing it's a *magnetic* amplifier. The advantages are obvious: there are no moving parts — hence, there's nothing to wear out. It's shock-proof and vibration-proof.

Secondly, it has a core of PERMERON — I-T-E's amazing new core material. We say "amazing" because *all* PERMERON cores have identical magnetization characteristics. This means designers can predict amplifier performance accurately and positively *before* undertaking the expensive job of winding and potting the reactor!

Furthermore, the lower control currents required in amplifiers made with PERMERON cores result in space-saving equipment with higher amplification factors and faster response time!

Magnetic amplifiers with PERMERON cores are now being produced by several large electrical manufacturers for an ever-expanding field of uses. These cores, with their amazing characteristics, have helped make magnetic amplifiers practical for many new uses and better for many old ones.

If *your* business is amplifiers, or controls, it will pay you to take another look at PERMERON!

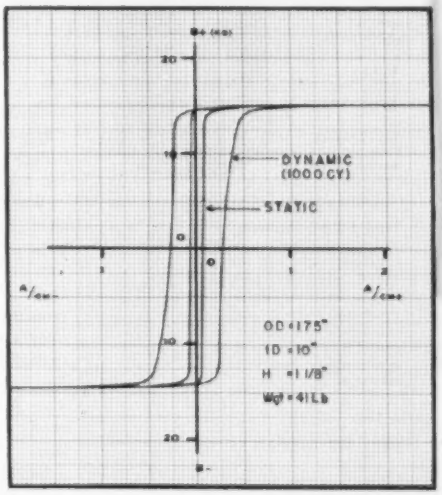

For additional information write—I-T-E Rectifier Division, or consult your local I-T-E Representative

I-T-E PERMERON

A product of Rectifier Division, I-T-E CIRCUIT BREAKER COMPANY,
19th & Hamilton Streets, Philadelphia 30, Pa.

MECHANICAL RECTIFIERS • SWITCHGEAR • UNIT SUBSTATIONS • ISOLATED PHASE BUS STRUCTURES • RESISTORS • SPECIAL PRODUCTS

The New
PYRAMID
"Humidi-Seal"
(TUBULAR PAPER CAPACITOR)

Repels Moisture!
Ruggedly built to withstand undue vibration and rough handling
Outer tube plastic impregnated to prevent moisture absorption
Light outer coat of high-temp wax provides double protection
Each end plastic sealed against moisture
Leads anchored securely in solid plastic end
PYRAMID
HUMIDI-SEAL
.05 MFD.
600 V.D.C.

Type 85TOC "Humidi-Seal" capacitors are specially designed for 85° C. operation, even in the most humid atmospheres, and will meet the severe present-day demands of endurance in television receivers, auto radios, etc.

WRITE FOR COMPLETE LITERATURE

Representatives and Distributors throughout the U.S.A. and Canada

PYRAMID

PYRAMID ELECTRIC COMPANY
155 Oxford Street
Paterson, N. J., U.S.A.
TELEGRAMS: WUX Paterson, N. J.
CABLE ADDRESS: Pyramiduso

BUSINESS BRIEFS

By W. W. MacDONALD

Mobilization Miscellany: Industry and government have plans for mobilizing electronics production facilities to handle any military needs in the immediate future. From where we sit it seems as though the industry's planning is most advanced, and some people in Washington privately admit it.

Possible new government body is the Electronics Production Resources Agency, proposed as a means of coordinating requirements of the military departments under the direction of the Munitions Board. It would consist of two members from Army, two from Navy, two from the Air Forces and one Munitions Board observer, plus a combined military and civilian staff. It would work closely with the Electronics Division of the Defense Production Agency, which is under Department of Commerce auspices. Not yet approved but no doubt will be.

Add to the three industry bodies reported last month as engaged in mobilization planning the Electronic Parts Manufacturers Association, with offices in the Capitol. Representing "smaller independent parts manufacturers." No connection with RTMA.

Washington scuttlebutt has it that if the President asks for and gets an additional ten-billion dollars in early 1951 at least one of these billions will go for electronics equipment. This would be over and above the $2-$2.4-billion orders for the balance of 1950 and fiscal 1951 mentioned last month. The predicted pyramiding is already beginning, even before election.

Shortages of raw materials needed in our field are already developing. Watch, in particular, aluminum, copper, lumber, nickel, soda ash, steel, tin and tungsten. How much is real shortage and how much is the result of stockpiling no one seems to know.

Speaking Of Mobilization, it is becoming more and more evident that mobile communications equipment constitutes an important part of current civilian-defense planning.

Judging by many recent and dovetailing signs, people with such equipment to sell should, in this order, (1) step up normal contacts with local police officials, (2) backtrack among similar state officers who may have been neglected in recent years and, (3) cultivate a few federal men coordinating the nation's civilian-defense effort.

Most actual buying will probably be done by cities and towns, the present emergency constituting an excellent excuse to buy more mobile radio equipment they have wanted for a long time anyway. Some will be done by States egged into it from above and below. And Washington officials are worth cultivating if for no other reason than to see that any recommended equipment specifications are flexible.

Bracket Standards: The word "bracket", now part of television terminology, is of typographical rather than technical origin. It refers merely to the symbols embracing the wide range of scanning rates needed to cover existing black-and-white and proposed color transmissions, symbols such as we use here [?%$¢#!].

Public Confusion can be counted upon if and when bracket standards are adopted and stations start transmitting part or full time in color.

To begin with, existing receivers tuned to such stations will see nothing but a blur; accessories will be required to resolve the blur and provide a black-and-white picture.

Even with such accessories, or with a new set in which a switching circuit (see p 66) has been provided, the black-and-white picture obtained from a color program will have only about one third the detail to which the public is accustomed.

Finally, it will be necessary to buy another accessory, or another

Better TV picture resolution ...better picture gamma

...with this SYLVANIA Type 1N60 Germanium Diode

This diode is a point contact rectifier, designed for efficient and dependable service as a video detector diode for TV receivers.

In terms of set performance, the efficiency of this Sylvania Germanium Diode means better picture resolution, especially at low signal levels. The improved linearity means better picture gamma, or range of picture contrast, in the near white regions where human vision is most critical.

Rugged Construction

The Sylvania 1N60 has construction features which assure long, trouble-free life and electrical stability. Flexible tinned leads are swaged to nickel end caps which are welded to threaded brass plugs. These plugs are screwed and firmly cemented into a strong ceramic body, thus providing a thermal reservoir, insulating the pigtails from the active element and permitting close soldering. For further information mail the coupon today.

Important ADVANTAGES for set designers

1. Low series capacitance (plate-cathode)
2. Low shunt capacitance (stray to ground)
3. Complete freedom from hum
4. Absence of contact potential
5. Compact size and ease of mounting
6. Ruggedness and permanence of ceramic
7. Built-in thermal insulation... (no soldering danger)

ELECTRONIC DEVICES; RADIO TUBES; TELEVISION PICTURE TUBES; ELECTRONIC TEST EQUIPMENT; FLUORESCENT TUBES, FIXTURES, SIGN TUBING, WIRING DEVICES; LIGHT BULBS; PHOTOLAMPS; TELEVISION SETS

SYLVANIA ELECTRIC

Sylvania Electric Products Inc.
Advertising Dept. E-1011
Emporium, Pa.

Please send me ratings and full information about Sylvania Germanium Diode, Type 1N60.

Name _____

Company _____

Street _____

City _____ *Zone* ___ *State* _____

SHOCK AND VIBRATION NEWS

COLLINS
new vhf radio equipment
USES AIR-DAMPED
BARRYMOUNTS

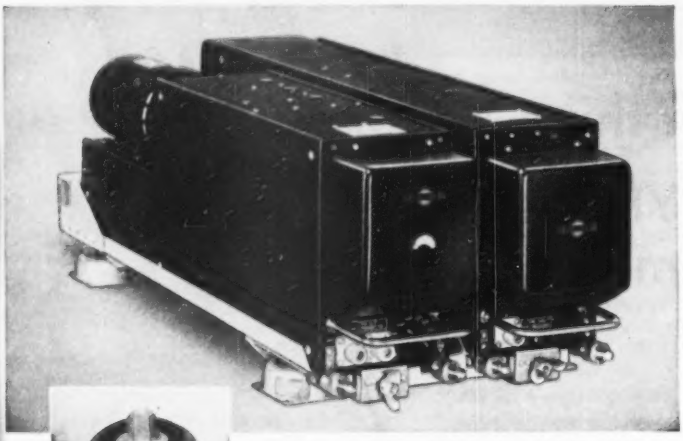

FOR ASSURED CONTROL OF SHOCK AND VIBRATION

A full line of navigation and communications equipment — developed by Collins for aircraft use in the vhf and uhf bands — makes available to the aviation industry complete integrated radio facilities that meet all requirements for navigation and communications over Federal airways.

This new Collins equipment obtains vital protection against shock and vibration with air-damped BARRYMOUNTS.

In the Collins application, the unit BARRYMOUNTS support mounting bases, of Collins design, in single- and dual-unit styles, with provision for plug-in connection of navigation and glideslope receivers, accessories, and transmitter.

Unit air-damped BARRYMOUNTS can also be furnished for direct installation to airborne instruments and in combination with Barry-built standard and special mounting bases.

Whatever your shock or vibration problem, Barry experience and consulting engineering facilities offer a sure solution. Write for free catalog listing stock BARRYMOUNTS; for special information, call our nearest office or write to

THE **BARRY** CORP.

Main Office 177 Sidney St. ● Cambridge 39 Massachusetts

New York Rochester Philadelphia Washington Cleveland Dayton
Chicago Minneapolis St. Louis Los Angeles Toronto

new set, in order to actually see a picture in color.

We would hate to be the station, manufacturer, distributor, dealer or serviceman who has to explain all this to laymen.

Station Economics could, we think, become quite involved when either color or black-and-white time is available to television sponsors.

How many people will initially constitute the color audience? How many who see the program will be looking at it in color and how many in black-and-white? Who will take the financial rap while the color audience is being built, the stations or the sponsors?

This, it seems to us, is where we came in.

Railroads are now using a whale of a lot of electronic communications equipment. Here's a list showing the number of radio and carrier-current transmitters in use as of July 15:

	Radio	Carrier
Alabama Great Southern	12	—
Alton & Southern	21	—
Apache	7	—
Atchison, Topeka & Santa Fe	454	—
Atlantic Coast Line	26	29
Baltimore & Ohio	44	1
Bangor & Aroostook	41	—
Barre & Chelsea	3	—
Bessemer & Lake Erie	10	5
Birmingham Southern	42	—
Boston & Maine	25	—
Brooklyn East. Dist. Term	4	—
Carbon County	3	—
Central of Georgia	11	—
Central Railroad of N. J.	12	—
Central Railroad of Pa.	3	—
Chattahoochee Valley	3	—
Chesapeake and Ohio	267	5
Chicago & Eastern Illinois	5	—
Chicago & North Western	10	—
Chicago, Burlington & Quincy	278	6
Chicago Great Western	50	—
Chic., Milwaukee, St. Paul & Pac.	123	—
Chicago, Rock Island & Pacific	143	—
Chicago, South Shore & South Bend	78	—
Columbus & Greenville	2	—
Colorado & Southern	55	—
Delaware, Lackawanna & Western	49	—
Denver & Rio Grande Western	255	40
Des Moines and Central Iowa	11	—
Detroit, Toledo & Ironton	14	—
Duluth, Missabe & Iron Range	22	78
Elgin, Joliet & Eastern	8	—
Erie	293	—
Fort Worth and Denver City	55	—
Florida East Coast	20	—
Georgia Northern	8	—
Grand Trunk Radio Comm.	3	—
Great Northern	36	3
Gulf, Mobile & Ohio	61	—
Illinois Central	22	—
Jacksonville Term. Co.	14	—
Kansas City Southern	—	74
Lake Terminal	26	—
Lehigh Valley	11	—
Los Angeles Junction	7	—
Louisville and Nashville	6	—
Louisiana & Arkansas	—	27
Louisiana & North West	10	—
Maryland & Pennsylvania	5	—
McKeesport Connecting	9	—
Minnesota, Dakota & Western	5	—
Missouri-Kansas-Texas	16	—
Missouri-Kansas-Texas of Texas	8	—
Missouri Pacific	210	22
Modesto & Empire Traction	3	—
Monessen Southwestern	11	—

Monongahela Connecting	13	—
New Orleans Terminal Co.	13	—
New York Central	208	45
New York, Chicago & St. Louis	178	—
New York, New Haven & Hartford	24	1
Niagara Junction	10	—
Norfolk & Western	—	4
Northern Pacific	41	—
Pennsylvania	85	830
Pittsburgh & Ohio Valley	6	—
Point Comfort & Northern Ry.	4	—
Richmond, Fredericksburg & Potomac	20	—
River Terminal	10	—
St. Louis-San Francisco	36	—
St. Louis-San Francisco & Texas	3	—
Seaboard Air Line	103	—
Southern Pacific	217	—
Southern	229	—
Steelton & Highspire	26	—
Terminal RR. Assoc. of St. Louis	—	1
Texas & Pacific	75	—
Texas & New Orleans	7	—
Toledo Terminal	16	—
Union Pacific	109	—
Union	13	—
Walla Walla Valley	6	—
Western Maryland	7	—
Western Pacific	52	—
West Virginia Northern	3	—
	4,439	1,176

Radio-Telegraph Carriers engaged in interstate or foreign communications and doing $50,000 or more worth of business in 1949 employed 97 engineers and paid them an average of $104 weekly. Radio operators totalled 380 and received $68, and there were 120 marine-coastal operators receiving an average of $73 weekly. Figures from an FCC-Department of Labor joint report just released.

Speaking before the late-August convention of the National Electronic Distributors Association in Cleveland (attendance reported at 2,400) RCA's Hal Bersche predicted a one-billion-dollar electronics replacements parts business by 1955. He thought there might be 2,600 distributors, and 130,000 servicemen in the field by that time.

Remington Rand has, we are told, so far sold 25 industrial television systems to such users as universities having medical courses, to schools training artists for commercial programs, to the military and others.

Contrast between two industries with respect to communications equipment is emphasized by the story about the ferryboat that recently ran aground in a fog and unsuccessfully tried to summon assistance by means of whistle signals. It just happened that a radio-equipped taxicab was aboard, and a message through the cab's dispatching office brought a tug.

SIGMA

"mite"

DOUBLE POLE
SENSITIVE DC RELAY

(Illustrated: Type 22RJ-CC)

TYPE 22RJ CHARACTERISTICS

- **ENCLOSURE** — 1" x 1" x 1 1/4" high above chassis, hermetically sealed.
- **WEIGHT** — 3.5 ounces max.
- **CONTACTS** — 2 amperes nominal rating (DPDT max.)
- **SENSITIVITY** — Available standard adjustment approximately 40 milliwatts for DPDT contacts.
- **COILS** — Insulated for 500 volts, wound up to 12,000 ohms, will dissipate 1 watt.
- **VIBRATION** — 15 g's vibration does not disturb contacts, changes operating points approximately 5%.
- **SHOCK** — 50 g's sustained acceleration does not disturb contacts or damage relay. (In least favorable orientation operating points change less than 2 to 1 at 50 g's.)
- **STABILITY** — Neither contact wear nor temperature extremes (−65° and 100°C) will affect operating points more than approximately 5%.

STANDARD DPDT ADJUSTMENT		
Coil	Operate	Release
50 ohms	28.0 mils	10.0 mils
100 "	20.0 "	7.0 "
200 "	14.0 "	5.0 "
500 "	9.0 "	3.1 "
1000 "	6.3 "	2.3 "
2500 "	4.0 "	1.4 "
5000 "	2.8 "	1.0 "
8000 "	2.3 "	0.8 "

Write for Bulletin 22

SIGMA Instruments, Inc.
SENSITIVE RELAYS
62 Ceylon St., Boston 21, Mass.

Critical Requirements of Television Prove Remarkable Performance of Mallory FP Capacitors!

There can be no more convincing proof of superiority than the performance records hung up by Mallory FP Capacitors in the demanding field of television service.

In one case, an outstanding television manufacturer kept detailed records of field failures of component parts over a six month period . . . found only six Mallory failures, with nearly 400,000 FP Capacitors in service!

That's service beyond expectations!

That's why so many leading manufacturers insist on Mallory Capacitors that have set the pace in the industry for years. That's why you should specify Mallory, at no premium in price, for any application that demands continuous, trouble-free performance.

MALLORY FP CAPACITORS

Mallory FP Capacitors are designed to operate continuously at 85° C—and are famous for their long *shelf life*. Write for your copy of the Mallory FP Capacitor data folder.

FP is the type designation of the Mallory-developed electrolytic capacitor having the characteristic design pictured and famous throughout the industry for dependable performance.

P.R. MALLORY & CO. Inc.

MALLORY

P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA

SERVING INDUSTRY WITH

Capacitors	Contacts
Controls	Resistors
Rectifiers	Vibrators
Special Switches	Power Supplies

Resistance Welding Materials

CROSS TALK

►**COLOR REPORT** . . . On October 11, the FCC issued its final report based on the color television hearing, in which it decided to adopt the CBS field-sequential system. We do not intend to criticize this decision, as such. It was arrived at after an exhaustive hearing, according to due legal process, by a body specifically set up by Congress to make such decisions. The Commission decided to adopt a noncompatible system because in certain vital respects it performs best *now*, and to discount the promise that a compatible system would in the near future offer superior performance. The Commission elected to act on what it saw, rather than on what it foresaw.

This may turn out to be a mistaken judgment of the first magnitude. But it may also be a correct judgment, if the promise of the compatible systems fails to be realized. Only time, many months of time, could have settled that issue beyond doubt. The Commission was under crushing political pressure to make the decision now. It bowed to that pressure, and in so doing it took a calculated risk.

Such risks are a conspicuous feature of the commission form of governmental regulation. They must, we feel, be accepted as one of the costs of a much larger benefit, the democratic form of government.

At that point, however, we pull the emergency cord and get off the train. We view with the utmost seriousness two aspects of the FCC "first color report".

First, we are alarmed that the Commission has attempted to extend its jurisdiction to a part of the body politic over which the statutes give it no authority. The Commission has "suggested" that all manufacturers modify the designs of their receivers so as to go into production, by a date as early as November 15th, with "bracket standards." If the manufacturers could not, in substantial majority, agree to do so by September 29th, the adoption of the CBS system would become final forthwith. If they did agree, the decision would not be final before December 5th, and possibly not until January 5th. If the compatible systems show sufficient promise in that time, the decision might be put off indefinitely. Thus, the radio industry was asked to underwrite the CBS system *before* it was finally and officially adopted by the Commission. The industry wisely refused to act on the proposal.

Such action would have the effect of raising the list price of all new receivers by from $30 to $50, with no guarantee that the added equipment will be useful. Moreover, it removes from the public the choice of making an investment in the CBS system now, or waiting until the system establishes itself. Finally, the time schedule was patently unrealistic. In the 6½ weeks from September 29th to November 15th, the industry could not possibly convert designs, procurement and production as the Commission suggests. In the circumstances, the Commission's suggestion can only be interpreted as an attempt to force the industry into accepting responsibility for a decision in which it had no part. This is "commission politics" at its worst.

The second item concerns only one of the Commissioners, Robert F. Jones. Jones, in an 80-page annex to the FCC color report, presented "a study of the disgraceful treatment of the field-sequential system by the industry since 1940". The burden of this opus is that the industry committees, which have testified before the FCC on television matters, have systematically obstructed the introduction of color television by "sham engineering testimony".

The industry committees referred to are the 1940-41 National Television System Committee, and N.T.S.C. Panel 1, the Radio Technical Planning Board and its Television Panel, and the Joint Technical Advisory Committee, its supporting committees and consultants. According to Jones, none of the members of these groups, excepting the two CBS members, have presented consistent, reliable and trustworthy testimony during the past ten years.

We wonder whether the worthy Commissioner knows the men he so recklessly and immoderately attacks. The combined membership of these committees comprises 121 men, 45 of whom are fellows of the IRE, 25 directors, past and present, of the IRE, the present president of the IRE and eight past presidents, six men who hold the IRE Medal of Honor and four others who have won the IRE Morris Liebmann Memorial Prize.

An indictment of these men is an indictment of the whole profession of radio engineering. They have built the radio service of the United States from its earliest days, they have managed the technical effort in electronics during two wars. Without their cooperation, the FCC simply cannot function in regulating its highly technical domain.

When one man aligns himself against a whole profession, fair-minded men will conclude that the man is wrong. The only "systematic" aspect of the record presented by Jones is his own systematic rejection of any testimony that disagrees with his own notions. Moreover, the testimony is rejected not merely as wrong, but as intentionally dishonest. This is demagoguery. Any claim that *all* contrary testimony on a given subject has as its object the exploitation of the public is rubbish. While Jones' views stand, he disqualifies himself as a judicial servant of the people.

DUAL STANDARDS

Chapin and Roberts, of FCC staff, point to automatic bracket-standard switch they developed and installed on Bendix model 235M1 chassis

SINCE SEPTEMBER 1ST, when the FCC issued its report on future plans for color television service, equipment designers have been confronted with the prospect of redesigning transmitters and receivers to accommodate the so-called "bracket standards."

According to the report, the FCC may in the future authorize television stations to operate commercially on at least two sets of scanning standards, the present black-and-white 525-line, 60-field standard and the CBS 405-line, 144-field, field-sequential color standard. To this end, the Commission has requested receiver manufacturers to state whether or not they would be able to convert their designs so as to permit operation on any field-scanning rate from 50 to 150 cps and any line-scanning rate from 15,000 to 32,000 cps.

This wide range covers the existing black-and-white values (60 and 15,750) as well as the CBS color values (144 and 29,160) and, in addition, would leave room for later changes.

The FCC requested manufacturers to state by September 29th whether or not they would go along with this proposal. About 36 manufacturers replied, all of whom stated that they cannot, or will not, revise their designs within the time limit allowed. It was anticipated, therefore, that the FCC would proceed with its announced plan of adopting the CBS system at once, and color transmissions on 405/144 standards would be authorized.

The engineers of the industry are therefore much concerned with the problem of converting designs to encompass the dual values of 60–144 fields and 15,750–29,160 lines. The full bracket ranges of 50–150 and 15,000–32,000 are, for the moment at least, not being considered in design plans.

As a guide to designers, the Commission indicated that bracket-standard (b-s) receivers should have a manual or automatic switch which will select the scanning standards of the present black-and-white system (525/60) in one position and the CBS standards (405/144) in the other. The b-s receivers must be operated with equivalent picture brightness, picture size and scanning linearity in both positions of the switch.

The first and most obvious difficulty in operating any receiver on bracket standards is the fact that nonsynchronous operation is required. Accordingly, the interfering effect of the 60-cps power supply must be reduced to the vanishing point, which implies that filtering and shielding must be substantially better in the b-s system.

The Hum Problem

Hum difficulties arise in the form of three beat frequencies: 12, 24 and 84 cps. When a scene is televised in color by the field-sequential system, the scene is scanned once in each of the primary colors during three fields, or in 3/144 = 1/48th second. Therefore, unless the intensity of the primaries is the same in each field (true only when the object is white or gray) the video signal has a strong 48-cps component. If a 60-cps hum component is also present, a 12-cps difference frequency appears. Since this frequency is well below the flicker fusion frequency, an annoying 12-cycle flicker appears. This effect arises in the video transmission circuit and is present whether or not the deflection circuits are hum-free.

Two other hum components appear, one as an 84-cps beat between the 60-cps power and the 144-per second field scanning rate, the other as a 24-cps beat between the 120-cps second harmonic of the power supply and the field rate. These beats are above the fusion frequency (except 24 cps at high picture brightness) and hence do not ordinarily produce flicker as such. But they can readily produce a shimmer or jitter of the scanning lines. This appears if any 60-cps or 120-cps hum component is present in the deflection coils, or if such components exist as stray magnetic fields near the picture tube deflection system. Even if the stray fields do not affect the deflection directly, they may induce currents in the turns of the scanning yoke which have the same effect as if the hum were present in the scanning generator itself.

for Television Scanning

Following industry turn-down on bracket-standards proposal, FCC is expected to adopt CBS field-sequential color standards and to authorize transmissions in near future. Redesign of receivers to accommodate dual scanning standards poses difficult questions regarding sync and deflection circuits, hum reduction and stray magnetic fields

Removal of hum from the transmitter involves nearly every item of equipment from camera to final r-f amplifier. In receivers, some attention must be paid to r-f, i-f and video amplifiers, particularly to avoid hum modulation of the first detector and direct hum injection in the video amplifiers. This may involve extra by-passing with higher voltage by-pass capacitors. Heater-cathode leakage in tubes (particularly the picture tube) must be controlled. One designer believes that three 400-volt electrolytic capacitor sections of 10 to 12 μf each will take care of the by-passing requirement. Finally, the basic filtering of the power supply must be improved in the majority of receivers.

Control of stray fields, to avoid direct or induced distortion of the scanning, starts at their source in the power transformer. If it were possible to locate the transformer three feet or more from the deflection system, no adverse effects would be noted, but this is possible only in large console models, and it may be impractical (due to fire-underwriter requirements) even in such sets. Three approaches to reduction of the external field at the transformer itself are possible: redesign of the transformer to use lower flux density, banding the iron core with a copper strap linking the stray field and external shielding with high-permeability alloy. It seems likely that at least two of these three methods will be necessary in combination to achieve a satisfactory result.

A final hum problem, in quite another category, appears in the operation of intercarrier-sound receivers. In such receivers, overmodulation at the transmitter or overload of any circuit, which reduces the amplitude of the intercarrier beat to zero momentarily during each line scan, produces a hum or buzz in the sound output, at the field-scanning rate and its harmonics. In conventional sets, this interference has a fundamental at 60 cps. This component and its second harmonic are not readily reproduced by the loudspeakers commonly used. In the b-s set, when scanning at 144 fields, the intercarrier interference and its second harmonic (144 and 288 cps) fall within the frequency range efficiently radiated by even a small speaker. The cures for this trouble are care in transmitter operation

Scanning Times in the Bracket System
(in microseconds)

	Standard Black-and-White (525/60)	*CBS Color (405/144)*	*Bracket Range*
Field scanning interval (V)	16,667	6,944	6,667–20,000
Field blanking time (0.05 V to 0.08 V)	833–1,333	347–555	333–1600
Field retrace time (0.05 V or less)	833 or less	347 or less	333 or less
Line scanning interval (H)	63.5	31.3	31.3–66.7
Line blanking time (0.16 H to 0.18 H)	10.2–11.4	5.5–6.2	5.0–12.0
Line retrace time (about 0.13 H)	8.3	4.5	4.1

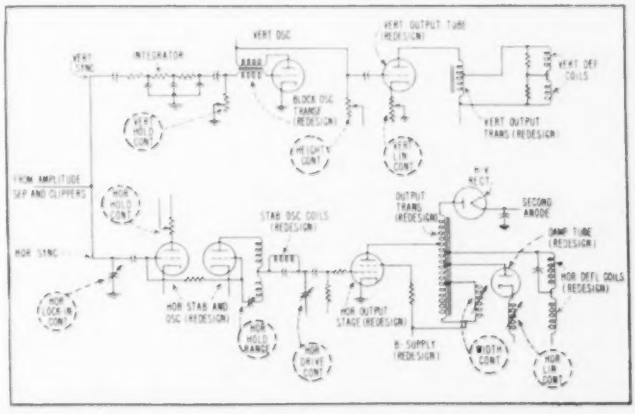

FIG. 1—Simplified vertical and horizontal sync, drive and output circuits of a 16-inch, 70-degree deflection chassis, showing elements that must be duplicated and switched (circled) and those requiring basic redesign

and particular care to avoid the possibility of overload in the receiver circuits.

Vertical Sync and Deflection

Turning now to the circuits in the b-s receiver which have to be switched, it is evident that the synchronization and deflection circuits are most intimately involved. The vertical circuits, which present a simpler problem than the horizontal, are considered first.

The sync signals are amplitude-separated following the second detector in the conventional manner; existing amplitude-separator circuits will serve without change. Following amplitude separation, frequency separation occurs. At this point it is believed desirable by some designers to design a new vertical integrator circuit, designed specifically for the 144-field rate. This circuit would be connected in the 405/144 position of the b-s switch, while the conventional 60-field integrator might be retained and connected in the 525/60 position.

Following the integrator, the frequency-determining element (a capacitor or resistor, or both) of the vertical scanning oscillator must be duplicated and switched. In addition, since the vertical retrace time is 347 μsec or less in the 405/144 position and 833 μsec or less in the 525/60 position, the discharge element must be duplicated and switched. In multivibrator oscillators using a stabilizing coil, the coil will probably have to be switched. Some designers doubt that the multivibrator circuit can operate satisfactorily over the range from 50 to 150 cps. The blocking oscillator circuit is considered suitable over this range when the proper components are connected to it.

The only vertical control normally available to the customer on the front of the cabinet is the vertical hold control. In some models this control is at the rear, together with the vertical size and linearity controls. In any case, it is the consensus that all three rear-of-chassis controls must be duplicated and switched to insure that the proper settings for synchronism, height and linearity are met at the two positions. The front-panel vertical-hold control would probably be planned as a vernier applicable to either position, rather than a control which would cover the whole range from 60 to 144 cps.

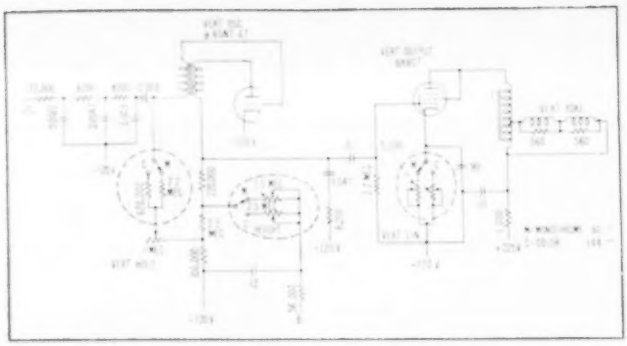

FIG. 2—Circuit modification of RCA 9T246 vertical drive and output stages, as designed by CBS engineers. The switched parts are circled

Vertical Deflection Output Circuit

The vertical output circuit must be considered from the standpoint of scanning power, efficiency and voltage stress. The condition stated by the FCC that picture brightness and size must be same at both positions of the b-s switch has been interpreted strictly to mean that the second-anode voltage on the picture tube shall not change between positions.

When the vertical scanning rate is changed from 60 to 144, substantially more power must be fed to the vertical deflection coils to produce the same peak-to-peak deflection current, which is required to produce the same size picture at the same second-anode voltage. Although the scanning power required is not strictly proportional to the field rate, since the vertical deflection coils have a substantial resistive component, it is believed that substantial additional vertical scanning power would be required, and in some receivers this means adding an additional vertical output tube, or installing a larger tube. In a few receivers, reserve power is available in existing designs.

The voltage-stress question arises because the retrace time is reduced in the 405/144 position by a factor of 2.4, while the peak-to-peak current range is unchanged. Therefore, unless the yoke is also switched to change the inductance, the Ldi/dt term in the retrace voltage peak is increased by 2.4 times. Many existing yokes and vertical output transformers are capable of withstanding the additional voltage stress, but others are not. The transformer, handling more power, will require a larger core for a b-s set than for a standard set. The yoke itself would not have to be redesigned in most cases, although some changes may be introduced when the horizontal portion of the yoke is worked over, as is required.

Examples of possible drives and output circuits are shown in Fig. 1 and 2. Figure 1 is a simplified diagram of the sync and deflection circuits. Figure 2 shows circuit changes designed by CBS engineers to modify the RCA type 9T246 chassis, which uses a blocking oscillator in the drive and autotransformer in the output. The vertical hold, height and linearity controls are duplicated and switched as shown. This circuit was designed before the FCC requirements regarding size and linearity were announced, and it is not claimed that the circuit will meet these requirements.

Horizontal Sync Drive

Modification of the horizontal drive circuit is complicated by the fact that substantially all modern receivers use horizontal stabilizing circuits. The first of these circuits, the afc type designed for the RCA 630TS chassis, is shown in Fig. 3.

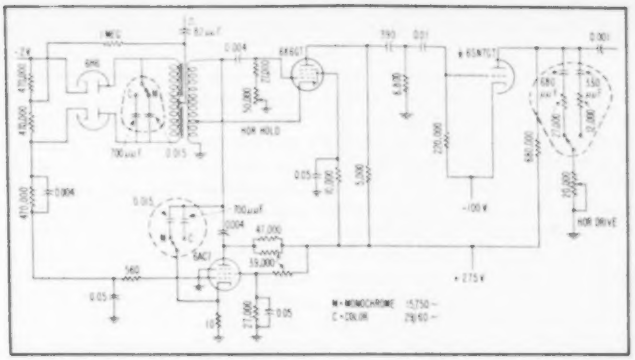

FIG. 3—Changes in a-f-c (synchrolock) stabilizer and horizontal drive of RCA 630TS chassis. Three double-pole switch sections are used in this CBS modification

The modifications shown were designed by CBS engineers. Here the switching involves a change in two capacitances, one across the discriminator transformer secondary and the other across the 6AC7 reactance tube. In addition the *RC* load of the 6SN7 horizontal drive tube must be duplicated and switched. Here, as in the circuit of Fig. 2, it is not claimed that this circuit will meet exactly the FCC requirements.

A more recent type of horizontal stabilized drive is shown in Fig. 4. This is the synchroguide circuit of the RCA 9T246 chassis, as modified by CBS engineers. The drive switching is considerably more complicated in this case, five double-pole positions being required to change the capacitances associated with the horizontal lock, frequency and drive controls.

The changes shown in Fig. 1 for these portions of the circuit follow the conclusion reached by most designers that the FCC requirements can be met only if a total of at least five horizontal drive functions are switched: horizontal hold control, lock-in adjustment, stabilizing circuit adjustment, discharge capacitor, (possibly also redesign of horizontal oscillator transformer where used) and drive capacitor across the grid of the output tube.

Horizontal Output Circuit

By far the most critical circuit in the b-s receiver is the horizontal output deflection and high-voltage circuit. This circuit, in existing receivers, consumes a large fraction of the total B-supply power and uses a large beam-tetrode (6BG6, 6BQ6, or 6CD6, all of which are variations of the type 807 transmitting tube). In view of its cost, no component of receivers has received closer attention in recent years than this. As a result, very substantial changes in design have occurred which permit 70-degree scanning angles to be achieved at 13,000 volts with less power in 1950 than was required to scan a 50-degree angle at 9,000 volts in 1946.

When the circuit is redesigned in strict accordance with the FCC requirements, it is found that from 30 to 50 percent more scanning power is required. This in turn requires (1) a radical redesign of the horizontal output transformer and the horizontal coils in the scanning yoke, (2) the addition of a second 6BQ6 or 6CD6 beam tetrode, and (3) the provision of 10 to 15 watts additional B-supply power. In view of these severe design requirements, most of the extra cost of the b-s operation is found in this circuit.

Less exacting approaches can, of course, be taken and will no doubt be adopted by many manufacturers. The horizontal output circuit shown in Fig. 4, for example, involves moderate additional B-supply power and uses but one 6BG6 tetrode, but is sufficient only for 55-degree deflection at 9,000 volts and is not guaranteed to provide the same size or brightness in both positions of the b-s switch. A new design of horizontal output transformer is required, with high-voltage switching at its secondary and at the screen dropping resistor of the output tube. When 70-degree scanning is in view, at voltages up to 13,000, and particularly when retrace-time requirements must be met in strict accordance with the proposed standards, no such simple a redesign as this will serve.

The clue to the difficulty is found in the horizontal retrace time, as shown in the accompanying table. The minimum horizontal blanking time specified by the FCC is 16 percent of the line scanning time, or 5.5 μsec at a line scanning frequency of 29,160 cps. If the upper limit of the scanning bracket is taken (32,000 cps) the blanking time is reduced to 5.0 μsec. Experience in production has proved that retrace time should not be greater than about 13 percent of the line scanning time, or 4.5 and 4.1 μsec respectively for 29,160 and 32,000 cps. These values are approximately one half the retrace time allowable in the black-and-white standards (8.3 μsec at 15,750 cps).

As previously noted, the scanning angle and second anode voltage remain unchanged in the two positions of the b-s switch. Accordingly the peak-to-peak scanning current must be the same, unless the number of turns on the deflection yoke is increased. But it is not practical to increase the deflection coil inductance appreciably, because the resonant period of coil and transformer secondary would thereby be increased and the retrace time lengthened beyond the allowable limit. Some designers feel that the yoke inductance can be increased from its present value of 8 to 10 millihenries to a maximum of about 14 millihenries. Others prefer to keep the yoke inductance substantially as it is.

In any event, switching of the yoke leads, which involves voltages as high as 6,000 volts above ground, is believed impractical. On the assumption that the yoke inductance remains unchanged, that the peak-to-peak deflection current is unchanged and the retrace time is reduced from 8.3 to 4.5 microseconds between switch positions, it follows the retrace voltage Ldi/dt will be

about twice as high in the 405/144 switch position as it is in the 525/60 position. But this violates the requirement that the second-anode voltage remain unchanged. Accordingly, it appears necessary to keep the retrace time the same in both positions at its minimum value (4.5 or 4.1 μsec) and to increase the width of the picture at the 525/60 position by adjustment of the width control. This procedure avoids all high-voltage switching and appears to be a popular method at the present writing. Other circuits, involving yoke and transformer switching, are also being investigated.

In accordance with the above design procedure, taking the yoke inductance at its present value of 8 to 10 millihenries, it follows that the voltage developed across the yoke during retrace is about double that of present standard designs, or 6,000 volts. Since the deflection-current waveform and peak-to-peak amplitude are unchanged, it follows that the circulating power in the output circuit is doubled. Part of the circulating power is recovered via the damping tube, but at present it appears that the increase in power requirement is about 50 percent. Improved design of damper circuits and output transformers will probably reduce this to about 30 percent.

Translated into practical values, this means that 10 to 12 watts must be added to the 25 watts of B-supply currently needed for the horizontal deflection circuit. This might be met, for example, with an extra 100 volts of B-supply of 100 to 120-ma capacity. When the b-s switch is in the 525/60 position this extra power is not required, and some means is needed to dispose of it, since the operating point on the output tube characteristics must not be changed for a given output transformer. One suggested method of disposal is to convert the power into heat in a bleeder resistor which would be inserted on the 525/60 position. Another is to change the transformer primary connections so as to keep the tube-operating point correct, but this involves high-voltage switching.

One further difficulty is the fact that the short retrace time, in combination with the 15,750 cps line-scanning frequency in the 525/60 position, will feed half the normal charge per cycle to the high-voltage rectifier. It is likely, therefore, that the voltage regulation at the second anode will be poor in the 525/60 position, although satisfactory at the 405/144 position. Increasing the size of the high-voltage filter capacitor will not cure this trouble, because the internal impedance of the rectifier feeding it is very high.

The higher voltage across yoke and output transformer secondary means that the insulation of these parts, and of the connecting cables, must be improved. Also, the damper tube is subjected to twice the normal voltage. Present damper tubes work close to the limit in this respect. Tapping the damper tube lower on the output transformer secondary will cure this condition, but with very serious effect on horizontal linearity. It appears, therefore, that a new type of damper tube, with substantially higher inverse voltage rating, will be required.

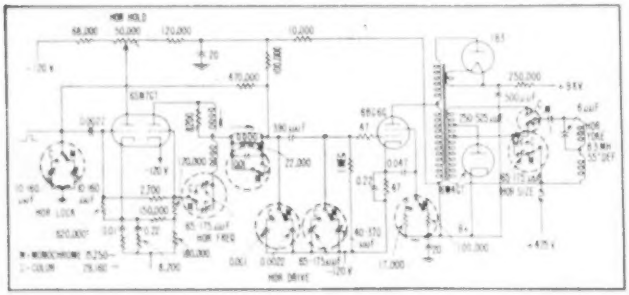

FIG. 4—Modern horizontal stabilizer circuits (synchroguide RCA 9T246) require more complicated switching. Output stage modifications shown here are suitable only for 55-degree deflection at 9 kv, probably will not meet FCC requirements

The output transformer itself must, of course, be completely redesigned. Since the secondary voltage is higher, the turns ratio must be reduced, and the core and windings must be capable of about 50 percent higher power dissipation. To get the extra power to feed to the transformer the output tube must have a higher voltage rating, a higher current rating or both. Since these tubes are now operated at the upper limit of the voltage rating, the higher-current method appears to be the only feasible approach. Thus two 6BG6 or 6CD6 tubes in parallel will be required until a new tube design becomes available.

The switching involved in the horizontal output circuit, designed on the above basis, is limited to the width control and linearity control, each of which must be duplicated and switched. One of these involves high currents, and the switch should be of the toggle type to avoid burning the contacts.

The B-S Switch Mechanism

A final consideration is the actual switch used to select the alternative circuits described above. If all the functions in a typical design are taken together, it is found that a 12-pole 2-position switch will be required. The majority of the switch contacts could be located on ordinary wafer sections, but at least two would involve high power or high current and would necessarily be toggle switches ganged in with the wafer mechanism. Since the lead length and circuit proximity of many circuits are critical, particularly in the horizontal sync and drive portions, it appears likely that a particular wafer would be assigned to these circuits and located in the immediate vicinity of the circuit to be switched. To assure that all the wafers would line up along the control shaft, rearrangement of present chassis layouts may be required.

One possible form of electronic mechanism is an automatic switch which measures the scanning rate of the signal to which the set is tuned and throws a relay to the corresponding position. Such a switch was developed by Chapin and Roberts of the FCC engineering staff

and put in the record at the color hearing. The circuit of the Chapin-Roberts switch is shown in Fig. 5, as applied to a Bendix model 235M1 chassis. The circuit shown at the bottom of Fig. 5 performs the rate-recognition and switching function. The switched elements of the sync or deflection circuits, which are connected to the contacts of the electro-mechanical relay, are shown above. The circuit changes made in the upper diagram, like those in Fig. 2, 3 and 4, are not sufficient to meet the requirements of same size, same brightness and linearity on both positions.

Changes in Transmitters

The principal problem facing transmitter designers (outside the procurement of color-cameras for live and film pick-ups) is the modification of existing equipment so as to operate on 144 fields per second without interference from the 60-cps power source. This modification is equivalent in many respects to operation on the 525-line 60-field system with 50-cps power supply. The changes involve improved filtering and by-passing of hum components throughout the system from camera to final r-f amplifier, so as to keep the hum level substantially below the 5-percent tolerance now permitted.

As previously noted, if power-supply hum is not rigorously excluded from the transmitted signal, a 12-cycle flicker will be evident on receiver screens and the scanning lines in the image may be subject to vertical and horizontal jitter, as outlined in detail above. The hum requirement applies not only to the 60-cps fundamental, but also to the lower-order harmonics, particularly the 120 and 180-cps components.

Three items of equipment will probably require so much modification as to make desirable entirely new designs: the color camera, the synchronization signal generator and the picture monitor. The hum requirement must be met, and complete control of stray magnetic fields is essential, in cameras and monitors. The sync generator must be hum-free, and provision must be made for generating the color-indexing pulse to keep the primary colors in step at transmitter and

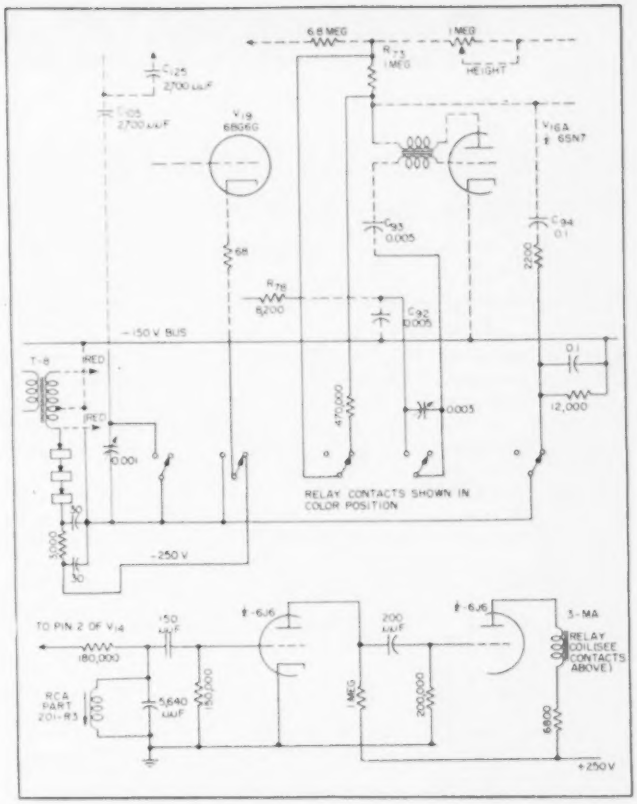

FIG. 5—Circuit of Chapin-Roberts automatic rate-recognition switch and deflection-circuit changes applied to Bendix 235M1 chassis. Circuit at bottom recognizes the scanning rate and throws relay. At top are shown 5-pole double-throw relay contacts which switch elements in deflection system

receiver. Thus far, in experimental transmission, cameras, monitors and sync generators have been operating from a separate motor-generator set producing 144-cps power. The requirement for such power is low, probably not more than one kilowatt if applied only to critical points. The alternator would, in this case, be locked in with the field frequency of the sync generator.

Estimates concerning cost and availability of such modified transmitting equipment vary widely. Many engineers believe that modifications of existing equipment, to render them hum free and to change scanning rates, can be accomplished in from 2 to 4 months, at costs running from 20 to 100 percent above the initial cost of the unit. One item of equipment which apparently cannot be modified but must be completely redesigned is the teletranscription unit.

Consideration has also been given to lighting. The average transmission loss of the color filters used in the CBS-type of filter-wheel camera is about 85 percent. To secure the same signal-to-noise ratio and depth of focus as with existing black-and-white equipment the lighting level would have to be increased about 7 times. In addition to providing more light, its color composition must be under better control and care must be taken to avoid flicker effects. Incandescent lamps on a-c supply and fluorescent lamps on d-c supply have been found satisfactory but single-phase fluorescents, unless operated from a 144-cps supply, produce noticeable flicker.—D.G.F.

Radiation Counters Aid

Differential radiation counters determine position of accumulation of radioactive material which, when added to bloodstream, collects in vicinity of tumorous tissue. Permit brain tumor recognition and location in matter of minutes

NEWLY PERFECTED methods of using radioactive isotopes as tracers in medical research have given rise to a need for high-speed counting equipment of greater versatility than has previously been available. It has been found necessary to provide improved indicating and recording devices, to use faster control and reset mechanisms, and to design new high-voltage supplies and input circuits to accommodate various types of detectors and permit greater flexibility.

The Isotron was designed to meet these requirements. The first model was built under contract for the Northwestern University Medical School with four specific applications in mind: (1) diagnosis and localization of brain tumors, (2) determination of thyroid iodine content as a means of diagnosing thyroid dysfunction, (3) investigation of peripheral vascular disease, and (4) investigation of blood circulation within the heart.

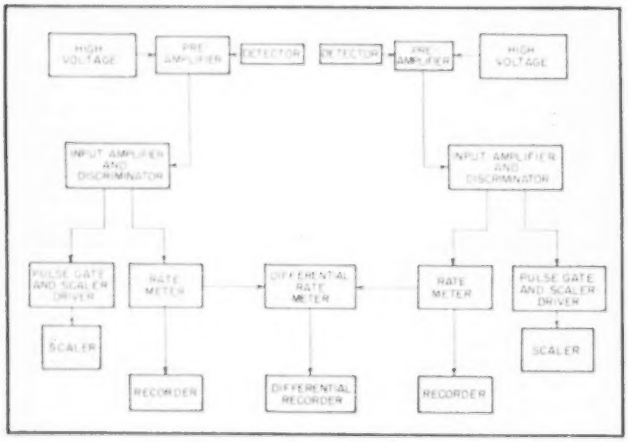

FIG. 1—Output of each detector and differential output are recorded for tumor location

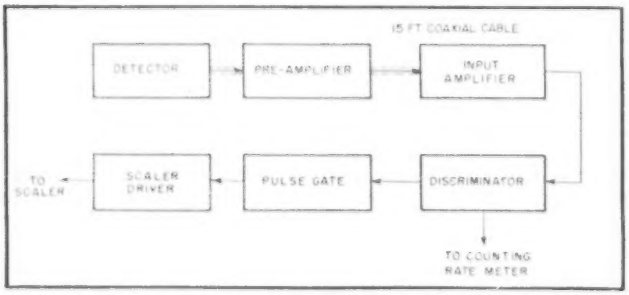

FIG. 2—Detector and preamplifier are housed in lead shields. Cathode-follower output from preamplifier permits use of 15-foot connecting cable

These specific projects introduce certain further requirements in addition to the generally desirable features mentioned. Heart research demands very rapid recording of the varying count rate. For this purpose a counting-rate meter is used with a high-speed magnetic oscillograph. Peripheral vascular investigations demand a detector housing which may be set in a wide range of positions, both vertically and horizontally. The tumor-detection technique necessitates a precise determination of the difference in counting rate at two separate points about the head. Thirty-two such difference readings are taken at two points simultaneously. An auxiliary circuit measures the difference between the two readings.

Basic Design

The equipment consists of two separate counting channels, each including a detector, a preamplifier, an input-pulse amplifying system and discriminator, a three-decade scaling circuit, a counting-rate meter, and a high-voltage power supply, as shown in Fig. 1. The detectors and preamplifiers are mounted on a mobile stand which was adapted from a commercial x-ray stand. The remaining units are housed in a mobile console containing six separate chassis in two stacks of three, each stack compris-

Brain Tumor Diagnosis

By RICHARD G. DAVIS
Nucleur Instrument and Chemical Corp.
Chicago, Illinois

ing one channel. The recorders are mounted at desk level between the two stacks, as shown in the photograph.

The two channels are identical in every respect except one channel, termed the slave channel, has a provision for switching the count-stopping and resetting control of its scalers to the corresponding circuits in the other channel. The other channel, termed the master channel, also houses a special voltmeter circuit which measures the difference between the two counting rates.

Detector Stand

The detectors are housed in lead shields to permit more accurate determination of count rate by minimizing the background count. The weight of these shields, some forty pounds altogether, necessitates the use of a counter-balanced stand. Considerable range in positioning is made possible by mounting the detectors on arms extending out from a yoke on the stand. This yoke is capable of vertical positioning and horizontal rotation. The arms themselves are easily moved both horizontally and vertically. Once a desired position is reached the entire system may be locked in place. For most positioning adjustments the yoke may remain locked as the arms are moved or the detector housings pivoted.

A short length of coaxial cable connects the detectors to the preamplifier housing. The preamplifiers are cathode followers whose low output impedance permits the use of a fifteen-foot cable to the input amplifier in the console.

High voltage for the detectors is provided by regulated supplies

Special counter-balanced detector heads are placed at various positions around the head of the patient. Electronic counter circuits and recorders determine exact location of brain tumor, as indicated by high concentration of radioactive tracer material

TUMOR LOCATING TECHNIQUES

Physical symptoms of brain tumors are extremely difficult to identify with certainty. Prior to the development of radioactive tracer methods, the diagnosis of brain tumors could be accurate only to within 80 percent, and no information was available as to the location of such a tumor if present.

Radioactive diiodofluorescien, when injected into the bloodstream, has a tendency to concentrate around tumor tissue. Such concentrations permit diagnosis of tumors with accuracies of 95.5 percent. By using a pair of differential detecting elements, the exact location of the tumor can be determined within a few minutes.

The workings of the electronic portion of the latest development in this valuable field of medicine are presented here. This month's cover shows a full-color view of the instrument at work mapping the progress of the radioactive tracer materials through the brain

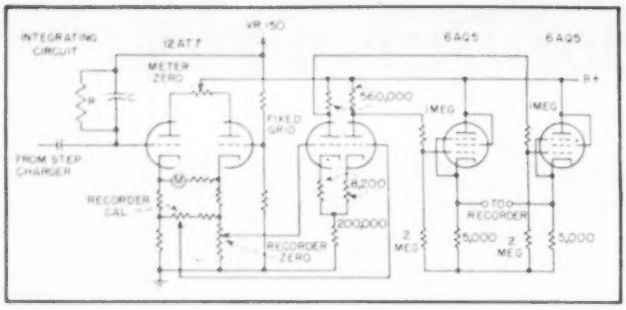

FIG. 3—Simplified schematic diagram of recorder-driving amplifier. Integrating circuit actually provides five choices of resistors and three capacitors for different counting rates from 400 to 40,000 per minute

whose outputs are continuously variable from 600 to 2,500 volts at currents as high as one milliampere. Conventional series-shunt regulators afford regulation within 0.01 percent per volt of line-voltage variation.

Input System

The input systems (Fig. 2) are capable of handling a wide range of pulse amplitudes. The four-tube input amplifier in each channel has a maximum gain of 400, and a high negative feedback factor makes gain independent of varying tube characteristics. A one-shot multivibrator using a 6J6 twin-triode functions as a pulse discriminator. The plate supply voltage to these stages is regulated to insure constant input sensitivity with varying line voltage. Adjustment of amplifier gain and of attenuation in the preamplifier provides threshhold sensitivities as low as one millivolt and as high as ten volts.

A pulse gate follows the discriminator. The pulse gate is a pentode amplifier whose screen grid is shorted through a low resistance to ground by the action of the scaler step-count switching circuit. This action, in effect, closes the gate instantaneously. Returning the screen to its normal voltage permits the pulse to be coupled into the power amplifier that drives the scaler. The count-stopping circuits have no effect on the rate-meter input.

Scaling Circuits

The scalers each comprise three standard decades,[1] giving scale factors of 10, 100, or 1,000. The decades themselves consist of a ring of five bistable stages followed by a scale of two. They are operable at speeds up to 200 kc at line voltages from 95 to 130 volts. A mechanical register capable of speed up to 25 digits per second is housed in each scaler. A precision timing clock is controlled by the stop-count switching circuit in each channel. It is reset to zero by the scaler reset switch.

Counting with the scalers is greatly facilitated by the automatic stop-count switching circuits. In addition to a manual stop-count switch, the count may be stopped by an automatic internal timer or by a preselected count circuit. Either of these systems simultaneously stops the timing clock. The internal timer recycles automatically. Contacts in the mechanical register are arranged to stop the count at register reading of 10, 50, or 100 when desired, making available the following possible preselected counts: 10, 500, 1,000, 10,000, 50,000, 100,000, 500,000 and 1,000,000. This operation also recycles automatically when the register is reset and the stop-count switch thrown. The type of count stopping used is determined by a scaler OPERATION SELECTOR switch.

The slave channel is equipped with a control selector switch which disconnects its own stop-count and reset circuits and causes its scaler to be controlled by the corresponding circuits in the master channel. This operation automatically synchronizes the two scalers.

The counting-rate meters consist of a pulse-forming stage and a step-charging network which feeds a resistance-capacitance integrating circuit whose voltage is measured by the d-c vacuum-tube voltmeter circuit shown in Fig. 3. The pulse shaper is a cathode-coupled one-shot multivibrator. It is triggered by the output of the pulse discriminator tube and, through the step-charger, delivers uniform pulses to the integrator.

Range Switching

There are five ranges from 400 counts per minute full scale to 40,000 counts per minute full scale. Range switching is accomplished by changing the value of the resistor in the integrating circuit. The integrating capacitors are 10 μf, 0.5 μf, or 0.1 μf, affording 3, 10, or 20-percent statistical error. A switch provides a fast-charging circuit for those capacitors not in use so that changing switch positions will not produce large discontinuities in the rate-meter reading.

The voltmeter uses a 12AT7 twin-triode with one grid at a fixed potential and the other grid voltage varied in accordance with the voltage across the integrating capacitor.

Recorders

The need for high-speed recording of counting-rate variations resulted in the selection of a magnetic oscillograph with frequency response up to 100 cycles. Three such recording units are used, one to record the output of each of the two channels and one to record their difference. Circuits are also provided to allow for instant pulse recordings. Recording may be triggered directly from the discriminator output or from the scaler output.

The 25-milliampere movements of the recorders necessitate the use of amplifier circuits of the type shown in Fig. 3. The amplifiers used consist of a high-gain stage of voltage amplification followed by a push-pull cathode-follower power amplifier. A symmetrical differential voltage amplifier provides push-pull output from a single-ended input. Degeneration in the cathode circuit provides added stability. The output of the voltage amplifier is direct coupled to the 6AQ5 cathode fol-

lowers, with some voltage gain sacrificed to obtain proper operating points for the 6AQ5 grids.

The input to the voltage amplifier from a point in the cathode circuit of the rate-meter voltmeter tube is applied to one grid of the next tube. The other 12AX7 grid is fixed at a point determined by a potentiometer in the fixed cathode of the voltmeter which functions as a recorder zero adjustment. Recorder calibration is independent of rate-meter calibration.

The amplifier which drives the differential recorder is essentially similar to the others. It takes a d-c input from corresponding points in the cathode circuit of each voltage meter tube. A one-milliampere meter shunting the recorder gives a panel reading of the difference rate. This amplifier differs somewhat in the matter of zero levels. The recorders are of a zero-center variety so that the two amplifiers, each of which record the rate of a single channel, must be electrically biased to zero. Accordingly, equal and oppositely directed currents flow through the recorder movement at zero and full scale while a balance occurs at half scale and no current flows. This is not the case with the difference amplifier, whose output is a center zero reading with deflection in either direction to indicate which channel is counting the higher rate and to show the magnitude of the difference.

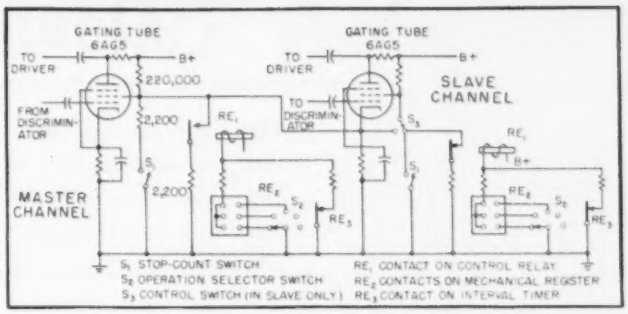

FIG. 5—Count-stopping circuits. It is possible to switch the count-stopping control of the slave channel to the circuits of the master channel by using S_3

Control Circuits

The automatic count-stopping circuits associated with the scaler are made to function by the action of the control relay. When the relay coil circuit is closed, relay contacts simultaneously stop the count and shut off the timing clock by duplicating the action of the stop-count switch. The circuit which energizes the relay is closed either by the automatic interval timer or by the contacts on the register as determined by the OPERATION SELECTOR switch. When this control is set for manual operation, the coil circuit is held open and the count must be stopped manually. The stop-count and reset circuits in the master channel are shown in simplified form in Fig. 4 with the stop-count switch in the count position and the OPERATION SELECTOR in the PREDETERMINED COUNT position.

As shown in the simplified schematic in Fig. 5, it is possible to switch the count-stopping control of the slave channel to the circuits in the master channel by means of S_3. Provision is made for similar switching of the scaler reset by another pole of the CONTROL SWITCH.

Careful shielding of the input amplifiers and all signal leads into it is made necessary by the high gain of the amplifier itself. Considerable filtering of the amplifier plate supply voltage is necessitated by the line transients caused by the action of the timers.

The writer is indebted to John Cooper of Northwestern University Medical School and to Robert Buntaine of Nuclear Instrument and Chemical Corporation for consultation and advice in preparing this paper.

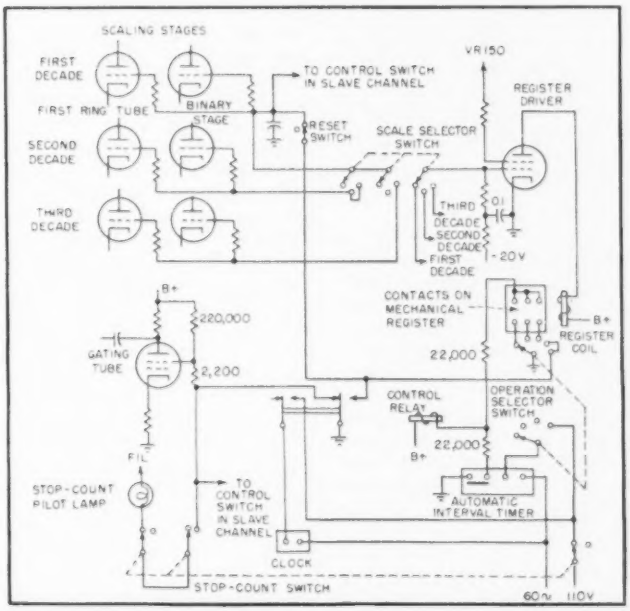

FIG. 4—Simplified schematic of scaler control circuits in master channel. Operation of selector switch permits timing of given count or counting during given time interval

Reference

(1) R. Weissman, Stable Ten-Light Decade Scaler, ELECTRONICS, p 84, May 1949.

Designing the

Development and fabrication of a high-gain television radiator omnidirectional in the horizontal plane with vswr better than 1.15 over the band from 529 to 535 mc. The 40-foot self-supporting structure mounted atop a 500-foot tower has a gain of 17 and width of 3 degrees

By R. M. SCUDDER

Engineering Products Dept.
RCA Victor Div.
Radio Corp. of America
Camden, N. J.

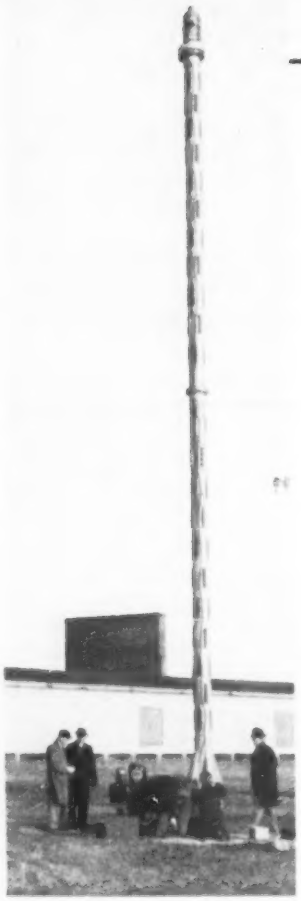

Bridgeport antenna undergoing final field tests



Scale model of the top half of antenna

AN experimental uhf television transmitter has been installed at Bridgeport, Connecticut, to study program service characteristics[1]. In order to get proper coverage from the present 1-kw picture transmitter it was necessary that the antenna have high gain, a pattern omnidirectional in the horizontal plane and a low standing-wave ratio over the 529- to 535-mc band. The desired gain was approximately 20, which necessitated a vertical beamwidth of less than 2.5 degrees. A vswr of less than 1.11 throughout the specified frequency range was desirable to minimize ghosts.

The high-gain requirement dictated that the antenna should be made up of approximately 20 elements radiating omnidirectionally and in phase, each element having a gain close to that of a half-wave dipole. Since the radiation had to be horizontally polarized, yet omnidirectional in the horizontal plane, a linear array of dipoles could have been used except that the feed system would have been cumbersome and complex. A linear array of half-wave slots spaced electrically one wavelength apart along a rigid coaxial line allows the use of a simple feed system. It furnishes the necessary horizontal polarization, and is made up of elements whose power radiation can be readily controlled. By spacing four slots around the rigid coaxial line, the array radiates in an omnidirectional fashion. Figure 1 shows the center two of the 20 elements.

The outer conductor of the coaxial line is 10¾-inch diameter by ½-inch wall steel pipe to make the 40-foot structure self-supporting. The center conductor is standard 3⅛-inch copper tubing.

Antenna Feed

It was decided to feed all slots in each half of the antenna in phase, treating each layer of four slots as an individual element, and to match each individual layer independently of the others. The feed system consists of a single conductor in the center of the 10-inch pipe, with the pipe itself the outer conductor of a coaxial line. The antenna is fed from the center, so that there will be no net vertical beam tilt with changes of frequency. This system, therefore, employs a coaxial line broken at the center. It feeds the two halves of the antenna in series, out of phase, which necessitates placing the probes on opposite sides of the slots.

In order to check the feasibility of such an antenna with a minimum expenditure of time and money, a 0.1 scale model, illustrated, was built, representing half the total antenna. This approach was possible because the final antenna was to be fed from the center

Bridgeport UHF Antenna

and be made up of two identical halves, one being the mirror image of the other. At first only one layer (consisting of four slots spaced around the pipe) was cut in the model pipe, and from this single layer all the parameters of the various layers were determined. These parameters included power radiated by the layer for various exciting-probe depths, phase shift of layer for various exciting-probe depths, as well as the depth and position of a single probe placed between the slots for matching the layer. A single probe to match all four slots in the layer was considered desirable, since it would result in a minimum number of holes to be drilled in the full-scale model. The setup shown in Fig. 2 was made to determine dimensions.

A test run was made to determine the power radiated by the layer as a function of exciting probe depth. For each setting of the exciting-probe depth, the matching-probe depth and position with respect to the layer were varied until the layer was matched. The amount of power being radiated by the layer was measured by the drop in power indicated on the output meter shown in Figure 2. For each setting of the exciting-probe depth, the physical position and depth of the matching probe were recorded. This procedure was followed for a large number of probe depths, and a curve drawn.

To measure the phase shift of the layer for various exciting-probe depths, all probes were first removed and the bleeder cable and probe placed in the guide as shown. The position of the probe and the attenuator at the top of the setup were varied until a null was indicated on the output meter.

The position of this probe was then noted on a scale at the top of the lower guide as the zero phase-shift reference. The exciting probes and matching probes were then reset at various depths and positions, and the bleeder probe moved along the guide until a null was again read on the output meter. The difference between the new bleeder-probe setting and the reference gave directly the delay caused by the layer for the various probe settings. This phase-shift data was



FIG. 1—Cross section of the feed system

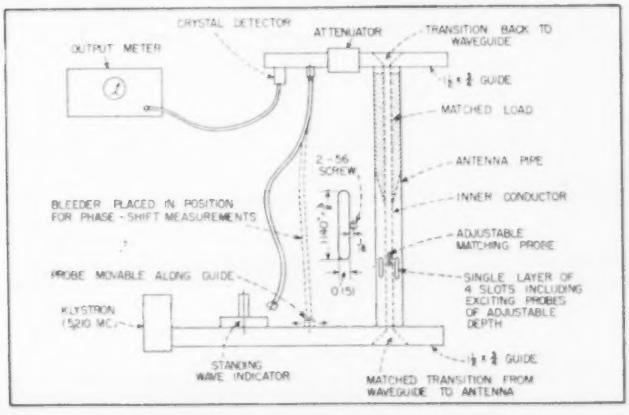

FIG. 2—Setup for determining antenna parameters

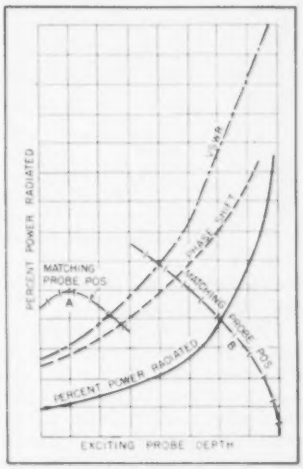

FIG. 3—Design data for scale model taken from measurements on single layer of slots

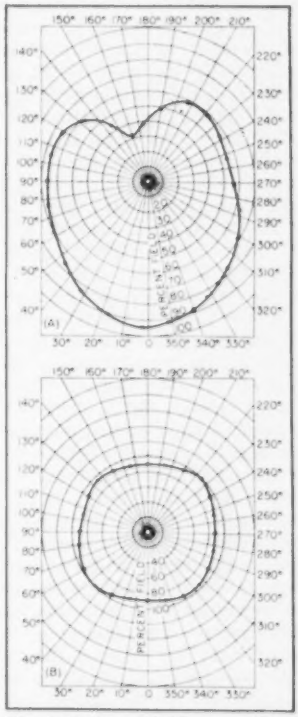

FIG. 4—Horizontal field pattern (A) of model antenna showing distortion from unwanted mode and (B) final pattern of scale model antenna

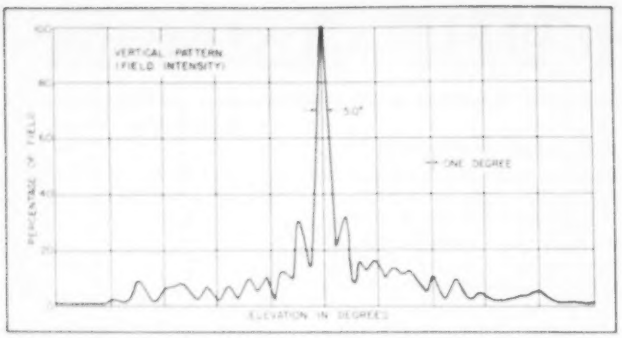

FIG. 5—Final vertical field intensity pattern of scale model antenna

then plotted on the same curve as the previous data.

The design of the complete antenna, including all probe settings and layer positions for in-phase excitation, was determined from the set of curves in Fig. 3. The phase-shift information indicated that eleven layers would be employed in each half of the antenna.

To make use of these curves, it was first necessary to determine how much power, relatively, should be radiated by each individual layer. Since the gain of the antenna is of prime importance, uniform illumination of the aperture is required. Therefore, all layers should radiate equal amounts of power. Consequently, the layer nearest the feed point (the center of the antenna, but the bottom of the scale model) should radiate 1/11 of the energy which reaches it; the second layer should radiate 1/10; and so on. It was then necessary only to pick off these various power levels from the curves and read off all other parameters, including phase shift. From the phase-shift information, the spacing between adjacent layers was calculated so that all layers would radiate in phase.

Using the information obtained from the curves, 10 more layers, including the matching-probe holes, were cut in the model. However, before the probes could be assembled, special attention had to be given to the last layer at the top of the scale model. Since this layer must radiate all the energy that reaches it, it alone must match the pipe with no other layers in operation. This effect was accomplished by experimentally adjusting the depth of the exciting probes and the position of a shorting plunger at the top of the pipe.

With this layer adjusted, the remaining layers were assembled according to the information on the curves. The vswr of the model, after complete assembly, was found to be approximately 1.15. This was considered sufficiently well matched for pattern measurements to proceed.

Pattern Measurements

The scale model was set up and a vertical pattern taken. This pattern was satisfactory in most respects, although the beam was tilted two tenths of a degree downward. This effect indicated that the top portion of the model was excited slightly ahead of the bottom section in phase, resulting in a gain loss of less than 2 percent.

The horizontal or azimuth pattern shown in Fig. 4A was found to depart excessively from circular. Upon investigation, it was learned that the numerous probes inside the pipe created an artificial dielectric that allowed the TE_{11} mode to be propagated up the pipe. This mode could be set up by either the waveguide transition at the bottom of the model, or any one of the matching probes along the pipe. Placing a suppressor at the bottom of the pipe and staggering the matching probes around the pipe in a spiral fashion failed to correct the condition. The propagation of this mode could have been prevented by reducing the size of the pipe, except that the pipe size had been determined from mechanical considerations. Eliminating any means of exciting the mode appeared to be the most practical solution. Circular symmetry along the full length of the pipe requires at least four matching screws for each layer. However, in order to allow for mechanical tolerances in both the scale model and the full-size antenna, it was thought advisable to use two matching probes per slot, or eight probes per layer. These two probes act as a two-stub tuner, and are placed $\frac{1}{8}$ wavelength apart. Such an arrangement permits easy correction of any change of slot impedance that

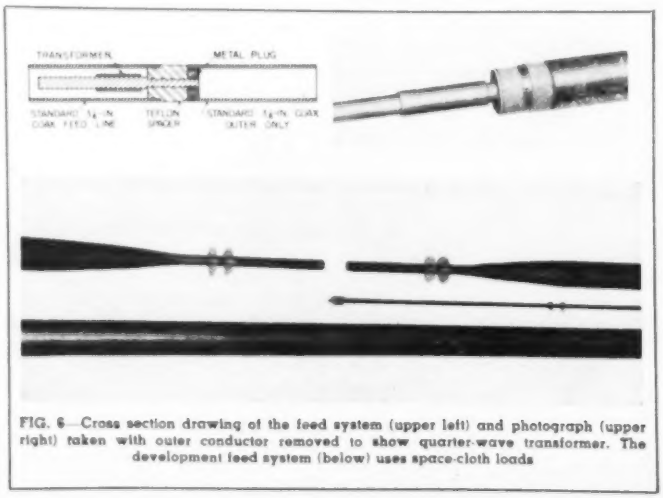

FIG. 6—Cross section drawing of the feed system (upper left) and photograph (upper right) taken with outer conductor removed to show quarter-wave transformer. The development feed system (below) uses space-cloth loads

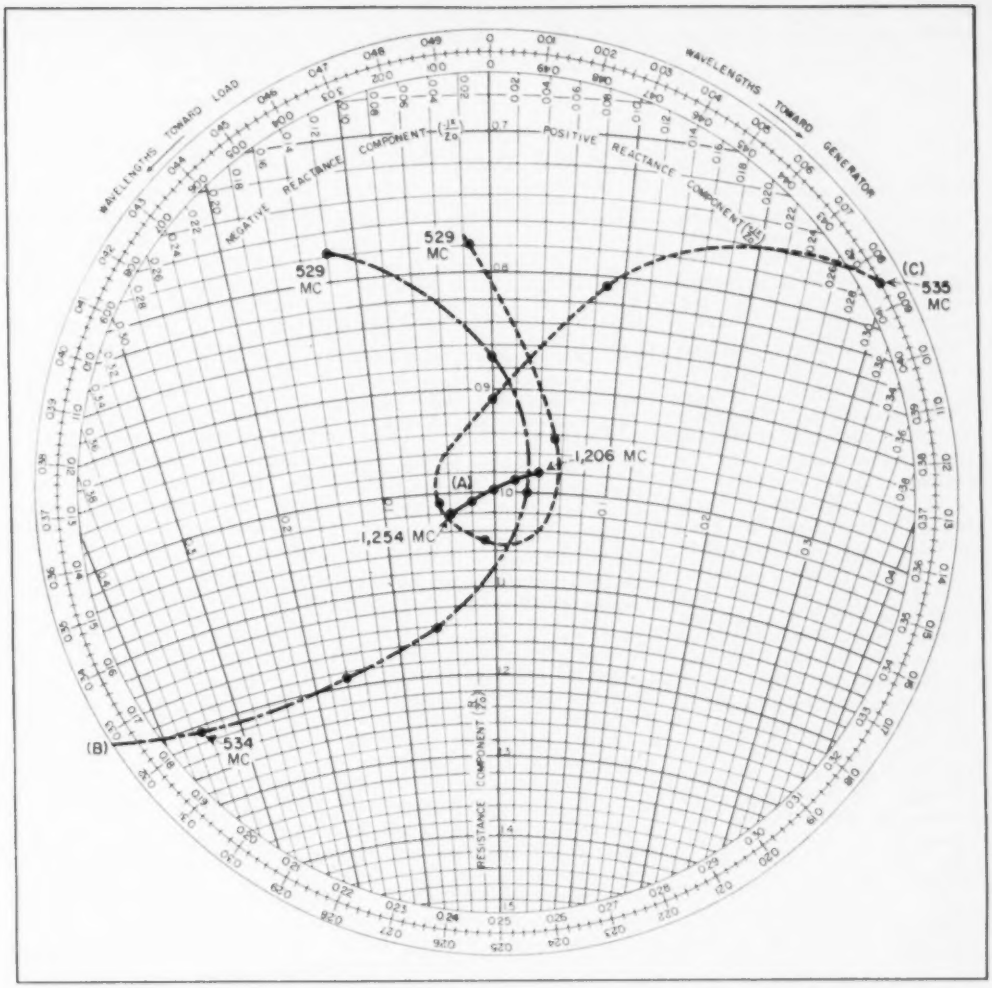

FIG. 7—Impedance characteristic of development model fed with quarter-wave transformer (A), of full-size model before adding transformer (B) and admittance characteristic of full-size model after addition of broad-band transformer (C)

might occur in the full-size model. A ½-wavelength spacing between the probes was chosen so that the necessary reflection coefficient could be obtained from the pair without introducing phase shift appreciably greater than that introduced by a single probe.

After rematching the model, layer by layer, using these matching probes, another horizontal pattern was taken. This pattern, Fig. 4B, shows that the field strength varied from 100 down to 88 percent, which is about what was expected from such a slot arrangement. Such variations are quite acceptable.

A vertical pattern, shown in Fig. 5, indicates that the beam has an upward tilt of approximately 0.2 degree. Two matching screws per slot cause some increased phase shift between slots over that received with only one probe per layer. However, this pattern also is quite acceptable. The half-power beamwidth is 5 degrees. The relatively high side lobes are largely due to the uniformly illuminated aperture. Integration of this pattern indicates a gain of 11.2 over a half-wave dipole. This means a gain of approximately 22.4 for the full-size antenna, since these patterns are for half an antenna.

In order to check the calculated gain, the gain of a horn was measured by placing it in front of a conducting mirror and then measuring the reflection coefficient caused by the mirror. Using the horn as a standard for substitution measurements, the gain of the model measured 10.5, which would mean a gain of 21 for a full-size antenna. This is not the gain measured at the peak of a horizontal

lobe, but rather the average gain between the peak and a low point in the azimuth pattern.

No impedance beamwidth measurements were made on the model, since the transition from waveguide to the coaxial antenna was not itself broadband. In order to make bandwidth measurements, all probes would have had to be removed and the transition readjusted for each frequency change. Therefore, it was decided to make these measurements on the full-size antenna.

In order to mount the full-scale antenna horizontally on 5-foot trestles, a convenient working distance from the ground, it was necessary to devise a means of preventing or correcting interference with the impedance measurements by the ground. The possibility of using space cloth was checked, using the scale model. A piece of space cloth (377 ohms per square), equivalent in width to 9 feet, separated by a quarter wave from a conducting plane, produced a vswr of 1.005 at an equivalent distance of 5 feet from the model. A Bakelite sheet a quarter-wave thick, with a dielectric constant of approximately 4, which very closely approximates the effect of ground with a dielectric constant of 16, was placed an equivalent distance of 5½ feet from the scale model. It produced a reflection coefficient corresponding to a vswr of 1.04. Accordingly, the full-size antenna was measured on the trestles with the space cloth beneath it.

Antenna Feed

The feed system previously outlined for the full-size antenna consisted of a standard 3⅛-inch 51.5-ohm coaxial line broken at the center of the antenna. Figure 6 includes a cross-section sketch of this system showing the break and the spacing insulation. The Teflon spacer gives not only a rigid gap in the line, but also acts as an end seal for the coaxial feed line.

The development of this feed system was done at approximately 2½ scale for ease and speed in handling. As shown in Fig 6, this feed system was inserted in a pipe corresponding in size to the 10-inch pipe in the full-scale model and space-cloth coaxial loads were



FIG. 8—Vertical field intensity pattern of full-size model at 532 mc

placed inside the pipe to simulate a perfectly matched antenna. With no transformer in the feed line, the vswr was 1.86. By placing a 37.2-ohm transformer in the feed line (Fig. 6), the impedance characteristic became that shown in Fig 7A.

Power Division

A check was made, using this model, to determine whether the power fed into the antenna would divide equally between the top and bottom halves of the pipe. It was found that 50.9 percent of the power was fed into the top half, while 49.1 percent was fed into the bottom half. This power split was considered satisfactory. The feed system was supported by four sets of dielectric posts threaded into the 10-inch pipe, as well as the shorting plates at each end of the antenna.

The full-size antenna was constructed using the dimensions, including slot size, probe depths and slot spacing of the scale model and the half-scale feed system. The only departure from the scale model in the full-size antenna was that alternate layers of slots were rotated 45 degrees. This change was made to improve the circularity of the horizontal pattern, and to give some insurance against the propagation of the TE_{11} mode along the pipe. The final model employs ⅛-inch thick polyethylene slot covers to weatherize the antenna. These have little effect on the impedance of the antenna.

An impedance check showed that it would be necessary to use the same matching technique employed on the scale model. However, before matching the antenna proper, the feed system was checked using a matched load in the 10-inch pipe and found to be satisfactory.

The procedure for matching the antenna proper was the same as that outlined for the scale model. The last layers were matched first by adjusting the probe depth and shorting-plate position. Adjustments proceeded towards the feed point layer by layer until the complete antenna was matched.

The matching probe settings in each layer were found to differ somewhat from the settings indicated by the scale model. Also, the settings of corresponding layers in the two halves of the antenna, which were presumably identical, were found to differ. These observations indicate that this type of radiating element is relatively sensitive to mechanical tolerances.

When the antenna was matched, an impedance versus frequency check was made. The resulting curve, shown in Fig. 7B indicates that the antenna is more frequency-sensitive than was anticipated. However, by using transformers in the feed system, the final impedance shown in Fig. 7C was obtained.

The vertical pattern of the full-size antenna at center frequency in Fig. 8 shows that the secondary lobe level is higher than that of the scale model, while the half-power beamwidth is somewhat less than half that of the scale model. This data indicates that the pipe is not uniformly illuminated along its length, but the illumination increases toward the top and bottom of the pipe.

A check of the horizontal pattern shows that the field strength varies less than 5 percent around the pipe, indicating that no TE_{11} mode exists in the antenna. By integrating the vertical pattern, the gain at center frequency was found to be 17.3. This is a figure somewhat short of the anticipated gain. It results chiefly from the nonuniform illumination.

Reference

(1) R. F. Guy, UHF Television Field Test, ELECTRONICS, p 70, April 1950.

Compact Amplifier for Aircraft Tests

Design of carrier amplifiers required for measuring small-magnitude, high-frequency pressures or stresses in small aircraft, including data on stable carrier generator and voltage stabilizing circuits. Sensitivity is 8 μv input per ma output up to 250 cps

By JOHN V. FOSTER and TAFT WRATHALL

National Advisory Committee for Aeronautics
Ames Aeronautical Laboratory
Moffett Field, Calif.

TO EVALUATE an airplane successfully, many physical measurements must be made in flight. When measured magnitudes of pressure or stress are small or the frequencies high, carrier amplifiers are widely used to get higher sensitivity and better frequency response than can be obtained with direct-recording oscillographs.

To facilitate flight testing of airplanes in which space is at a premium the NACA has developed the miniature carrier amplifier described below. The most important features desired were: compactness; good amplitude stability with changes in supply voltage, temperature and vibration; flat frequency response to 250 cps; small phase lag difference between channels; high sensitivity.

To avoid errors caused by carrier frequency drift when using reactive-type pickups or wire strain gages having excessive line capacitances, an American Time Products type 2001-1A, 2,000-cps tuning fork was used as the frequency source. This fork has a frequency change less than 0.001 percent per deg C. The output from this fork is fed into a wave-shaping and amplitude-control circuit shown in Fig. 1. The shaping is achieved by the action of drawing grid current through the grid limiting resistors and by overdriving the amplifiers. When the signal reaches the toroid-tuned circuit it is essentially a square wave having a fundamental frequency of 2,000 cps. This tuned circuit has a high Q that sharply rejects all harmonics of the square wave. The output of the last stage is then a sine wave of constant amplitude. The function of the two 1N35 crystal rectifiers and bias voltage E is to maintain a constant-amplitude square wave across the toroid coil.

Voltage Supply

The maximum voltage variation in a typical airplane power supply is from not less than 23.5 to not more than 28.5 volts. This change causes a corresponding variation from 11.7 to 13.0 volts in the regulated filament voltage. The same supply voltage change causes less than 1-volt variation in the 280-volt plate supply. Type B-46 ballast tubes are used for filament regulation and a typical degenerative-feedback voltage regulator shown in Fig. 2 is used for the plate-voltage supply. As Table 1 shows, these small voltage changes have negligible effect on the carrier output. Six power-output stages operating with parallel inputs are pro-

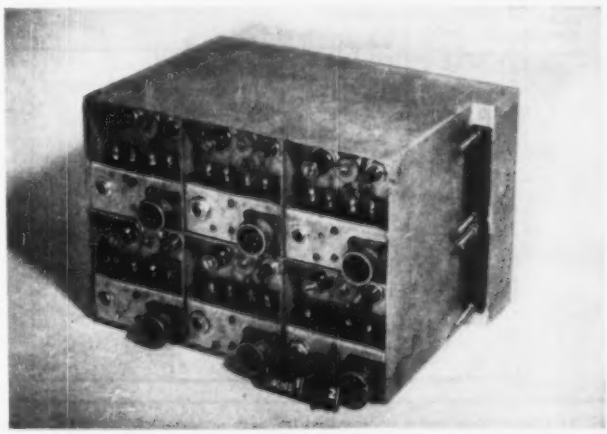

Front of six-channel amplifier, showing size relative to rule at lower right

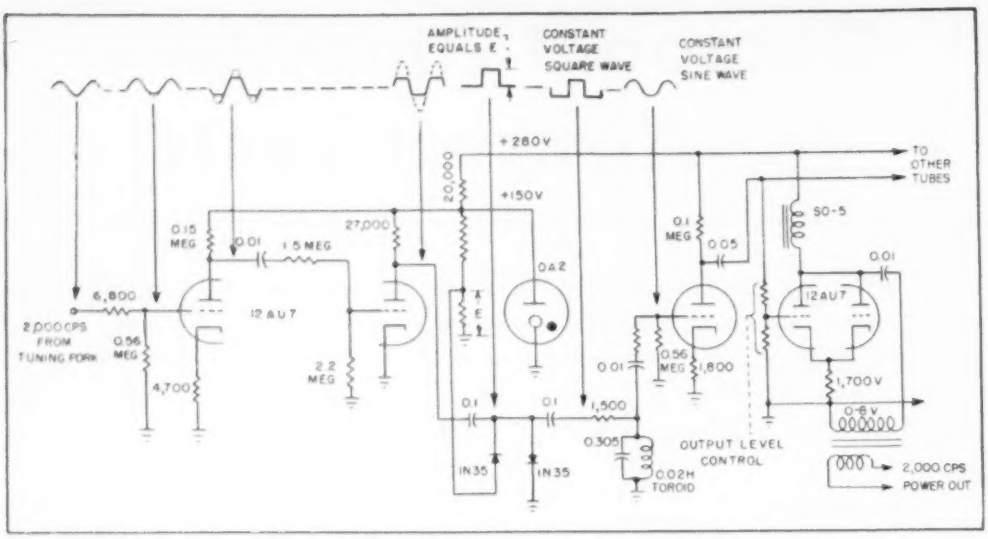

FIG. 1—Wave-shaper and amplitude control feeds six output tubes with parallel inputs similar to that shown

vided, one for each channel. Easily replaceable resistors are provided for individual adjustment of outputs. Figure 3 shows the maximum undistorted output of these regulator units at various load resistances.

The amplifier channels shown in Fig. 4 use Ouncer line-to-grid input transformers that are mounted in soft-iron magnetic shields. Crosstalk between channels is low enough to be considered negligible. Dual triodes used in the amplifiers are mounted on soft rubber to minimize the effect of vibration. The 12AY7 is less microphonic than the 12AX7 and is used except when maximum gain is desired. Twice the overall gain is achieved using the 12AX7 instead of the 12AY7 but the two are interchangeable in the circuit. Maximum voltage gain from the primary of the input transformer to the plate of the output tube is 25,000 using minimum feedback.

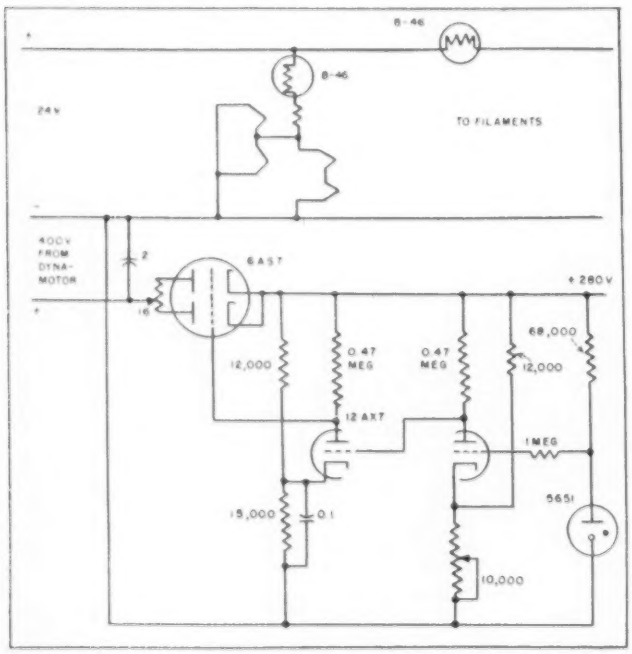

FIG. 2—Ballast tubes and a degenerative-feedback regulator control filament and plate respectively

High stability is obtained by using large feedback that is adjusted with the gain control. More feedback decreases the gain. The final position of this switch puts the 0.5-μf cathode-bypass capacitor from the grid of the 12AU7 to ground, effectively giving zero output to permit galvanometer positioning. Phase-lag difference between channels without adjustment of galvanometer elements or special compensating networks is less than 6 degrees at 200 cps. The tuned circuit between the first and second stages eliminates hash and extraneous low-frequency vibration pickup. Shunt feed in the output stage prevents saturation of the small output transformer. Germanium

Summary of Amplifier Characteristics

Maximum sensitivity	8 microvolts input per ma output
Output current range (± 1-percent linearity)	3 ma to 70 ma
Voltage gain to output transformer	230,000
Flat modulating frequency range	0–250 cps
Total physical volume	765 cu in.

crystal rectifiers minimize temperature effects.

Most carrier systems have built-in circuits for reactive and resistive line balance. To conserve space a portable box of variable capacitors is used to determine capacitance values. Its plug-in construction permits rapid determination of these values after which small fixed units (C_x) are soldered to lugs on the amplifier chassis. Resistive balance is obtained by miniature potentiometers, one mounted on each amplifier unit. The six individual amplifiers are mounted in a 6-cell bank with a multiple-point plug on each unit. This plug automatically engages with the common power plug on the main chassis when pushed into place. A jack on the front of each unit permits the insertion of an external meter in series with the recording meter.

Figure 5 shows the overall modulated-frequency response from input to output.

All components were carefully selected for minimum size and temperature coefficient. Electrolytic capacitors are particularly critical, having a large change in capacitance with temperature. Most of those checked had a capacitance at −40 F to −60 F that was only 10 percent of their value at room temperature. In the final design only one electrolytic was used, in the power supply where the value is not critical.

Since the construction of this equipment, several possible improvements have been considered. A Wien-bridge oscillator could probably be used as the basic frequency source instead of a tuning fork. Such an oscillator employing a high-Q circuit is inherently stable even over a wide temperature range. This modification would allow the unit to be smaller and less expensive. Ordinarily, in designing instrumentation for small airplanes it is advantageous to break up the units into small cable-connected components to allow for placement in available but remote locations. Interconnecting cables add volume and circuit complication. With basically very small equipment, it becomes practicable to stack all components together into a single unit.

Table I—Oscillator Output vs Filament and Plate Voltages

Filament Volts	Oscillator Volts	Plate Volts	Oscillator Volts
13.0	6.20	300	6.26
12.0	6.20	280	6.20
11.0	6.20	260	6.18
10.0	6.18	240	6.13
8.0	5.90	220	6.06



FIG. 3—Maximum undistorted output of the regulator unit of Fig. 2



FIG. 5—Overall modulated-frequency response of an amplifier channel

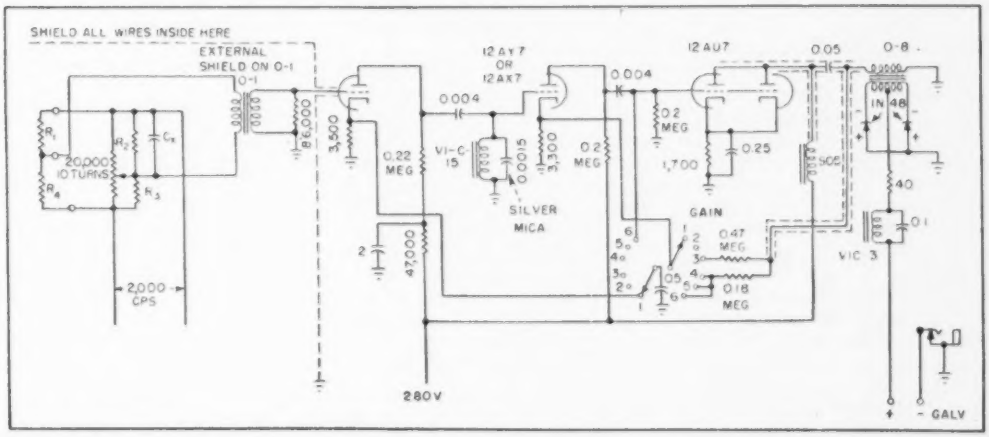

FIG. 4—Typical amplifier channel. Resistors R_1 and R_4 represent wire-wound skain gages. Capacitor C_x is adjusted for capacitance balance

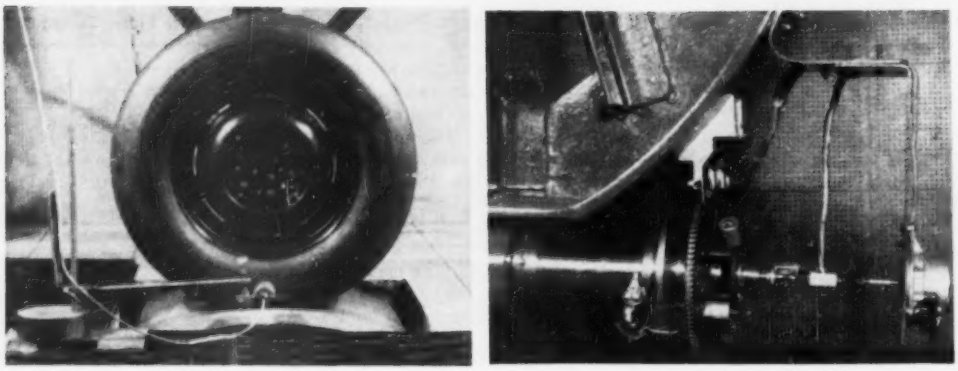

Experimental tire mounted to bear against surface of five-foot steel wheel protruding through floor of sound-proofed room, with microphone clamped in position to pick up airborne tread noise, and photoelectric commutator used to generate synchronizing pulse for selecting noise from desired tread pattern sample on tire. Aperture disc is on same shaft as tire, and rotates between phototube and light source that are mounted on worm gear so they can be rotated 360 degrees

Tire Tread Noise Analyzer

Samples of various tread designs are cut into single tire, and photoelectric commutator is used to ungate microphone amplifier circuit when desired sample bears against rotating drum. Resulting noise signal is studied with resonant transient analyzer whose frequency is varied by adjusting gain of feedback circuit

By S. A. LIPPMANN and K. A. FERGUSON

Tire Development Department
United States Rubber Co., Detroit, Mich.

THE HISTORY of the automobile is reflected in large part in the development of the tire. In the 1920's, the foremost consideration in the mind of the buying public was reliability and adequacy of operation. The early tires were notorious for their poor performance, and the early automobile was a close second.

Through the years, cars have become powerful machines, capable of long periods of operation without failure, and capable of being maneuvered at high speeds. The pneumatic tire has had a parallel development, with emphasis on its mechanical function. The advances in car and tire design have been so successful that at the current time saleability no longer is determined in general by endurance and mechanical capabilities, but by comfort and appearance. Comfort, therefore, has become a matter of prime importance to the manufacturer of tires.

One of the many factors involved in riding comfort is the noise of tires speeding over a road. The importance of this tire noise has grown over the years with the suppression of more bothersome internally produced vibrations in the car. The improvement in the nation's roads has also helped in bringing this factor to the fore. In dealing with the problem, development engineers have found electronic instrumentation a powerful tool. The equipment employed in one phase of the problem is described here.

From the viewpoint of the tire engineer, it is desirable to uncover the processes which generate airborne tire noise. The investigation of these mechanisms is approached through the study of the sound generated by specific elements of the tread design while the tire is running as it would on the road.

Sampling Technique

In the case of standard tires, there is the problem of isolating the noise of a particular element in the presence of the many which result from the tread design. To avoid this difficulty, use is made of an otherwise smooth treaded tire with the particular elements in consideration cut into the tread at various positions along the circumference. If there is sufficient circumferential spacing between the elements, the noises generated by any two do not overlap in time.

With this scheme of testing and the proper sampling equipment, it is possible to compare a series of variations in design with each

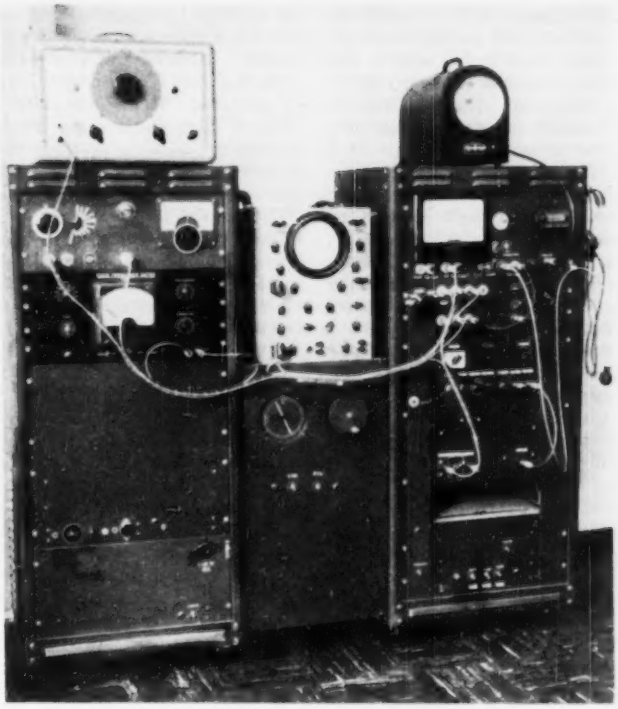

Equipment used in analyzing noise signal output of microphone positioned near tread of rotating tire. Strobolume at top of right-hand cabinet is used for examining treads while tire is in motion during test

other and with a standard element, while using only one tire. Thus, drift in the measuring instruments and change in testing conditions become negligible.

The design of the sampling equipment must take into account the fact that the noise resulting from a tread element, while similar in successive revolutions, nevertheless shows considerable random variation. Consequently, the noise is best treated as a transient signal.

Electronic System

The method employed is to produce a triggering pulse, synchronized with the angular position of the tire, which then initiates the opening of a gating circuit and the firing of a driven-sweep oscilloscope. The signal, picked up by a microphone, is amplified and passed through the gate into a transient analyzer. The output of this analyzer or the original noise signal may be observed or photographed with an oscilloscope. In addition, the triggering pulse actuates a revolution counter and, for visual observation, a high-speed flash lamp.

The problem of extraneous sounds and of reverberations is met by running the tire against the surface of a five-foot steel wheel which extends into a sound-insulated room. A directional microphone, located close to that portion of the surface from which the radiation is desired, picks up the signal. A conventional feedback amplifier with a stepped gain control supplies an amplified signal at an impedance level of 20,000 ohms. The selection of the significant portions of this noise signal in time is carried out by the synchronizing system.

Photoelectric Commutator

The synchronizing pulse originates in a photoelectric commutator whose setting is continuously variable. The photoelectric method is preferable to simpler mechanical devices because of its noiseless operation and the excellent definition of the pulse. The commutator consists of an aperture disc that rotates on the same shaft as the tire, and a phototube and light source that are mounted on a worm gear. The gear couples to the main control panel through a worm and flexible shaft arrangement. Readings of the position of this gear to within ½ degree are available at the control panel through a selsyn re-

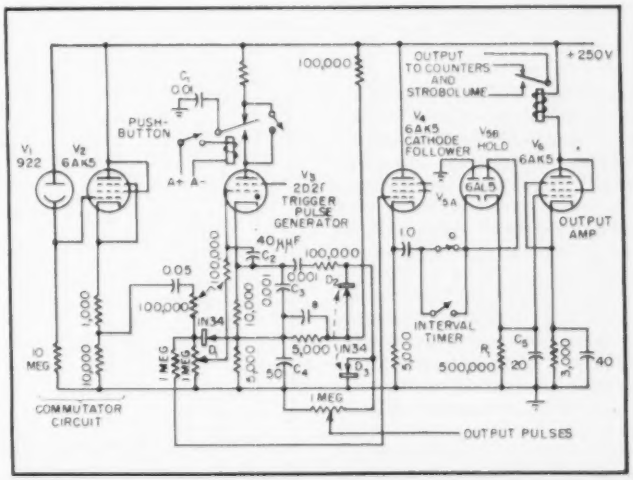

FIG. 1—Photoelectric commutator and trigger pulse generator circuits

peater system. A cathode follower, also mounted on the worm gear, lowers the impedance level of the commutator signal. This avoids capacitive shunting in the shielded cable leading to the control panel.

The characteristic output of the commutator is not in itself satisfactory for tripping the subsequent circuits and therefore is used to actuate an intermediate trigger-generating circuit. The desired trigger pulse should be steep at the leading edge so that synchronization of the scope and the gate circuit is independent of speed and, in addition, should be stabilized and adjustable in amplitude. For photographic recording, the trigger pulse must occur only once after depressing a hand switch, with release of this switch required for resetting.



FIG. 2—Output signal from photoelectric commutator, showing clipping at top due to shorting action of crystal diode in trigger-generating circuit, and corresponding output pulse (approximately 20 microseconds wide at base) obtained from trigger-generating circuit

Figure 1 indicates the circuit designed to meet these requirements. The commutator output is adjusted to a level just adequate to ignite a normally quiescent thyratron. The output of the thyratron, properly shaped, is the trigger pulse. By employing a capacitor to power the thyratron, single-shot or continuous operation is available. For continuous operation, C_1 charges during the standby period, from B+ through a resistor too large to sustain the discharge in the thyratron. For single-shot operation, charged C_1 is switched from B+ to the plate of the thyratron by means of a relay. At the next appearance of a signal from the commutator, the thyratron fires, and cannot fire again until the relay switches C_1 back for recharging. The relay is inserted between a pushbutton hand switch and the pulse generator for safety purposes.

Capacitors C_2 and C_3 in the cathode circuit insure rapid discharge of power supply capacitor C_3 through the thyratron, while still allowing the standby bias chain to be low in current drain. There are three 1N34 diodes in this circuit. Diode D_3 eliminates restoration difficulties in the coupling capacitor, D_2 together with the bypassed potential divider sets the level of the output signal, and the grid of the thyratron is kept from being driven positive by the clipping action of D_1. The output of this circuit is highly repeatable in time and in shape. Figure 2 shows this output and the commutator pulse which initiates it.

The photoelectric commutator also drives a revolution-counting unit and an electronically operated relay for flashing a GR 1532A Strobolume. Electromechanical counters are slow in responding and will not follow the commutator at high speeds. However, with a pulse-widening circuit, the proper drive is available. The commutator is buffered from the ensuing circuit by cathode follower stage V_4 in Fig. 1. Crystal diode D_4 provides restoration for the coupling capacitor. Diode section V_{5B} and C_5 act as a holding circuit with R_5 as a leak. The output of this holding circuit subsequently activates an output relay that trips either the counter or the flash lamp.

Gating Circuit

Since the gate circuit presents the noise signal to a transient analyzer, the gate must not introduce spurious electrical signals such as spikes or pedestals. In addition, the gate must be operated from a signal taken with respect to ground, it must sometimes stay open for an appreciable interval, and must not produce much distortion. Such gating systems as varistors, mixers, and pentode circuits do not meet all these needs, but the circuit of Fig. 3 does.

In operation, the signal from the trigger-shaping unit feeds monostable multivibrator V_3. The output of the multivibrator controls two gating circuits operating on the cathode bias principle. The audio signal is inverted in stage V_2. The direct signal is fed to one gate,

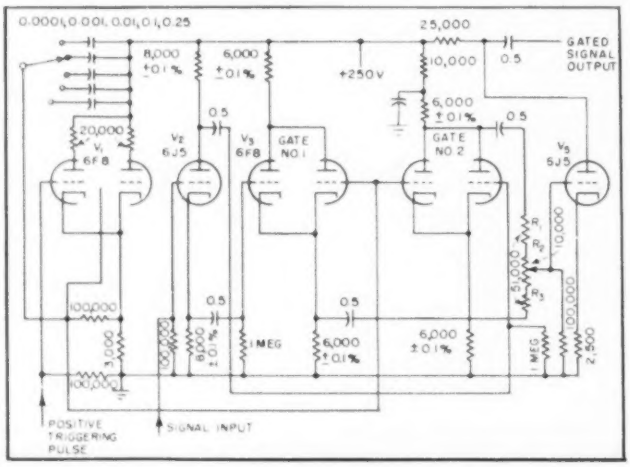

FIG. 3—Subtractive gating circuit for minimizing pedestals and transients

V_{3a} while the inverted signal is fed to the other identical gate, V_{3b}. The outputs of these two circuits are subtracted in R_1, R_2 and R_3, thereby greatly reducing the effect of the pedestal and other transients. However, because of the phase inversion, the subtraction does not cancel the signal.

The analysis of the frequency content of the gate noise signal takes place in the resonant analyzer. This device essentially consists of a high-Q series-resonant circuit to which the noise signal is applied. In the limiting case where the resistance of the circuit is negligible, the voltage across the inductive element is

$$E_{out} = E_{in}(t) - 2\pi f \int_0^t [E_{in}(\tau)] \sin 2\pi f(t-\tau)\, d\tau \quad (1)$$

where t = time, E_{out} = output voltage, E_{in} = input voltage, τ = variable of integration, and f = frequency to which resonant circuit is tuned. In the presence of resistance, a damping factor occurs in the integral. For the inductors used, this damping factor is unimportant and will be neglected here. For signals starting at $t = 0$ and terminating at time T, as for the gated noise signals, Eq. 1 reduces to a measure of the total amplitude of the harmonic content at f.

The circuit employed in the resonant analyzer is given in Fig. 4. Inductors L_{2A} or L_{2B} and capacitors C_1 to C_{10} form the nucleus of the analyzer. The input signal appears in the resonant circuit across 100-ohm resistor R_1, which is small enough not to affect the Q of the circuit materially. At the higher frequencies variable capacitor C_{11} permits continuous tuning of the analyzer.

For lower frequencies, the physical size makes the use of variable capacitors undesirable, and a feedback loop supplies the continuous adjustment. The signal across L_2 is inverted by V_3 and a fraction determined by R_3 is added to the input at cathode follower V_2. The total input signal E_i at R_1 then is

$$E_i = k_1 (E_{in} - k_2 E_{out}) \quad (2)$$

where k_1 is the gain of the cathode follower V_2 and k_2 is the net gain of the feedback loop including the adding circuit and feedback amplifier V_3.

The second term $(-k_1 k_2 E_{out})$ supplements the potential difference across the inductors and adds to the effective inductance in the circuit. For this reason, the resonant frequency becomes

$$f = 1/2\pi \sqrt{L C (1 + k_1 k_2)} \quad (3)$$

where L is inductance and C is capacitance. Potentiometer R_3 sets the value of the feedback gain k_2 and thus controls the frequency.

In general, it is desirable for the tapped capacitor bank to be employed in such a way that k_2 is as small as possible. Feedback of the resistive component of the drop across the inductor progressively lowers the Q of the resonant circuit as the gain k_2 increases. The additional stages contained in the resonant analyzer are for amplification, change of the impedance level, monitoring and isolation.

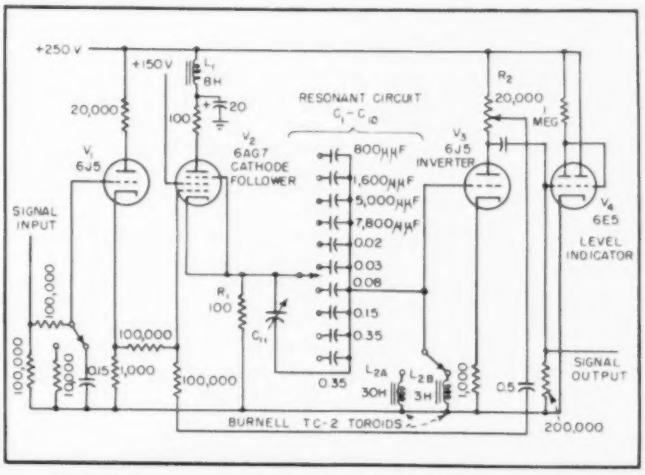

FIG. 4—Resonant analyzer used for determining harmonic content of signals



FIG. 5—Performance test of resonant analyzer. When upper 200-cps sine wave is applied to gating circuit output signal grows linearly during application of pulse and slowly dies out in quiescent period as in lower oscillogram

Performance

A typical performance test of the analyzer is shown in Fig. 5. The analyzer is set to resonate at the same frequency as a sinusoidal signal applied to the gating circuit. On firing the gate, the analyzer receives a pulsed wave train and reacts to this input in accordance with Eq. 1. The output signal is a sine wave whose amplitude increases linearly during the duration of the pulse, and maintains a relatively constant value thereafter.

Although the resonant analyzer is inherently a timing source, the nature of the input forcing functions makes it an uncertain time base. Consequently, it is desirable to incorporate an independent standard in the equipment for calibrating the sweep speed of the oscilloscope. This timing unit is composed of a Sylvania model 145 audio-frequency signal generator and a General Electric model DD7 frequency meter of the cycle-counting type.

The equipment has proven to be adaptable not only for the study of tire noise but also for examining other transient disturbances.

Overtone CRYSTAL

Quartz crystals can be made to operate directly on odd overtones up to 150 mc, with high power output and better stability than crystal would normally have at its fundamental. Technique involves shunting crystal with proper value of inductance and tuning plate tank for the desired overtone frequency

By GEORGE H. LISTER

President
Electronic Research & Mfg. Corp.
Cleveland, Ohio

THE INCREASING use of frequencies above 30 mc for limited-range communication and control purposes means that closely spaced channels are needed to provide for the many services that would like to use these frequencies. This close spacing, at least at the present state of the art, requires crystal control to provide the required carrier frequency stability.

Crystals can be ground to operate on fundamental frequencies as high as 30 mc. The Bureau of Standards has, in fact, processed crystals to 100 mc, but their commercial manufacture is probable only at some much later date. Making crystals physically thinner presents so many problems that some other means was sought for producing high frequencies directly from low-frequency crystals.

The goal was to find a circuit operating technique that in effect would slice a crystal electrically into the desired thinner plates, so that thick crystals could be made to vibrate with adequate power output at values much higher than their fundamental frequency. The development to be described achieves this goal by utilizing in a unique way the presence of overtone activity in certain types of quartz crystals. Overtone activity, to be described, should not be confused with operation as a frequency multiplier, wherein the plate tank is tuned to a harmonic of the fundamental.

Nature of Overtones

Many crystals, particularly BT and AT cuts, exhibit strong overtone activity wherein the crystal appears to consist of layers of active material operating in shear modes, with opposite outside faces going in opposite directions as shown in exaggerated form in Fig. 1. For the third overtone the crystal acts as if it had three equal layers; for the fifth, five layers; for the *n*th overtone, *n* layers, where *n* is always an odd number. The thickness of each vibrating layer is approximately 1/*n*th the thickness of the crystal at its fundamental.

Overtone crystals (improperly called harmonic crystals) have been on the market for some time, but most of these utilize the third overtone (generally around 30 mc) because higher-order overtones could not be developed by conventional circuitry. Investigation showed, however, that almost all carefully processed AT or BT-cut crystals exhibit activity on higher overtones such as the 5th, 7th, 9th, 11th and 13th. Many crystals even show activity at the 23rd overtone and a few have actually indicated activity on the 29th overtone, which for a 10-mc crystal would be around 290 mc.

The overtone frequency of a crystal is not an exact multiple, or harmonic, of the fundamental. Harmonics can only be obtained electrically, whereas crystal overtones are the result of pure mechanical vibration. The frequencies of overtones approach corresponding harmonic values but are either higher or lower by an unpredictable amount. For this reason, overtone crystals are ground to the desired overtone frequency and marked with that value, the fundamental being ignored.

An analogy is the string of a piano, which vibrates over its entire length to produce the fundamental note and over shorter lengths to produce overtones. The frequencies of these musical overtones are close to corresponding harmonic values but not equal to them, as any musician will testify.

It should also be pointed out that a crystal will vibrate at only one overtone at a time. The overtone at which it vibrates depends on the resonant frequency of the circuit of which the crystal is a part.

ADVANTAGES OF OVERTONE CRYSTAL OSCILLATORS

- Direct crystal control up to 150 mc with 10-mc or lower-frequency crystals
- Overtone frequency is only frequency present in circuit, hence no spurious radiation
- Direct frequency modulation is possible and practical, including carrier-frequency shift by d-c for keying or telemetering
- Temperature-frequency stability better than crystal itself
- Excellent voltage-frequency stability even up to 70 volts plate voltage change
- Vibration and severe jarring do not affect frequency
- Higher efficiency and much smaller vhf and uhf equipments, reducing battery drain and weight of mobile units

OSCILLATOR Design

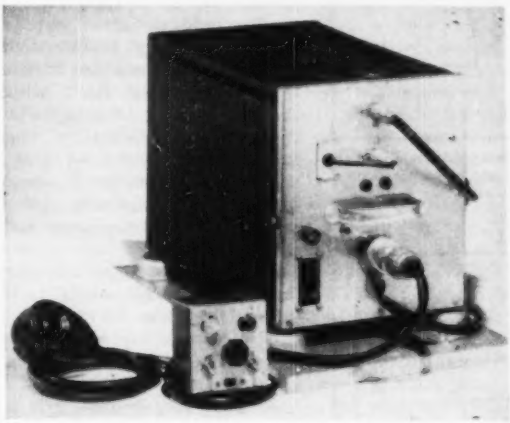

- Example of 460-mc mobile unit using overtone crystal oscillator
- Developmental model shown delivers 22 watts frequency-modulated output at 468.72 mc with ±10-kc carrier stability. Total current drain from 6-volt battery is 10 amp for receiver and 31 amp for transmitter. Total weight is 43 lb
- Transmitter crystal with fundamental of approximately 8.68 mc operates directly on 78.12 mc, which is 9th overtone. Reactance modulator for oscillator is driven by single a-f stage. Following crystal is low-power neutralized 6C4 isolating amplifier and 832A tripler stage with long-line plate tank coupled by balun to 4-150A final stage operating as doubler in cavity with 550 volts at 90 mc. Deviation is ±25 kc, with automatic deviation control. Audio fidelity is within 2 db from 60 to 10,000 cps
- Overtone crystal oscillator in receiver operates at 76.46 mc and is followed by 6AK5 six-times multiplier to get ample injection voltage for mixer. Grounded-grid amplifier stage precedes mixer; following it are three 10-mc i-f stages, limiter, discriminator, squelch circuit and final audio stage delivering 0.8 watt output. Sensitivity is better than 1 microvolt for complete limiting

Overtone crystals are ordered to an exact frequency, which is the frequency at which the electrical reactances of the crystal are equal and opposite and thus cancel. This frequency value is the true overtone value of the crystal alone, without holder or circuit. The circuits referred to operate at frequencies slightly removed from this series resonance value.

Oscillator Circuit Analysis

A study of existing circuits was made to determine why crystals exhibiting higher-order overtone possibilities would not perform on these overtones in conventional circuits. The conventional crystal oscillator circuit of Fig. 2 contains all of the important elements affecting the operation of a crystal. Typical equivalent values for a 10-mc crystal having a Q of 160,000 are $L = 0.02533$ h, $C = 0.01$ μf and $R = 10$ ohms. A typical value for C_T, the sum of C_1, C_2, C_3 and C_4, is 35 $\mu\mu$f.

The curves in Fig. 3 correspond to conventional operation of a quartz crystal at its fundamental frequency. The reactances of L and C vary with frequency in the manner shown in Fig. 3A, giving the curve of X_T as the algebraic sum of the reactances of the crystal.

The susceptance of crystal reactance X_T is shown in Fig. 3B. When added to the susceptance of the shunt capacitance C_T existing across the crystal terminals, curve Y_T is obtained. The reactance curve of this total crystal circuit susceptance is given in Fig. 3C. This curve indicates that a crystal used in a conventional circuit will operate as a parallel resonant circuit at an antiresonant frequency f_a. At this frequency the total susceptance Y_T in Fig. 3B is prac-



FIG. 1—How an overtone crystal works. The crystal acts as if electrically sliced into odd number of layers



FIG. 2—Conventional crystal oscillator circuit, drawn to emphasize the important elements affecting crystal operation

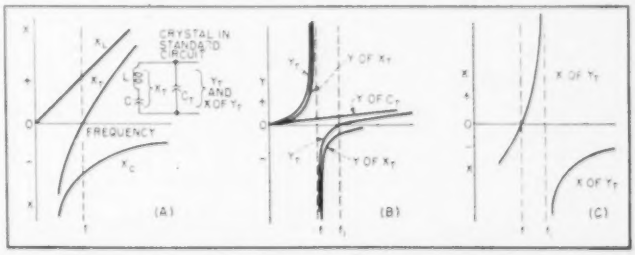

FIG. 3—Reactance and susceptance curves for standard crystal circuit

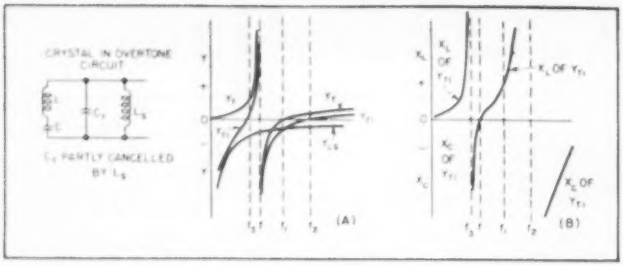

FIG. 4—Reactance and susceptance curves for overtone crystal oscillator operation. These curves are drawn for a crystal operating as an equivalent inductance. Similar curves may be drawn for the capacitive crystal

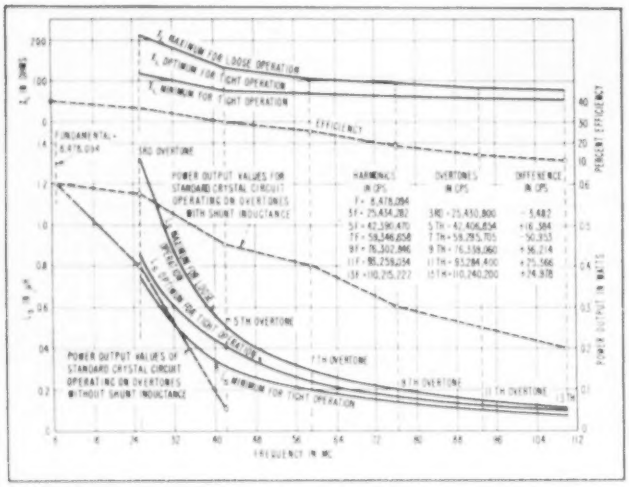
f_1 MAXIMUM FOR LOOSE OPERATION
f_1 OPTIMUM FOR TIGHT OPERATION
f_1 MINIMUM FOR TIGHT OPERATION
EFFICIENCY
FUNDAMENTAL - 8,478,094
3RD OVERTONE
POWER OUTPUT VALUES FOR STANDARD CRYSTAL CIRCUIT OPERATING ON OVERTONES WITH SHUNT INDUCTANCE
HARMONICS IN CPS
OVERTONES IN CPS
DIFFERENCE IN CPS
5TH OVERTONE
7TH OVERTONE
9TH OVERTONE
11TH OVERTONE
POWER OUTPUT VALUES OF STANDARD CRYSTAL CIRCUIT OPERATING ON OVERTONES WITHOUT SHUNT INDUCTANCE
FREQUENCY IN MC
PERCENT EFFICIENCY
POWER OUTPUT IN WATTS

FIG. 5—Characteristics of typical crystal operated on overtones through 13th in circuit using 6J6 with 150 volts on plate

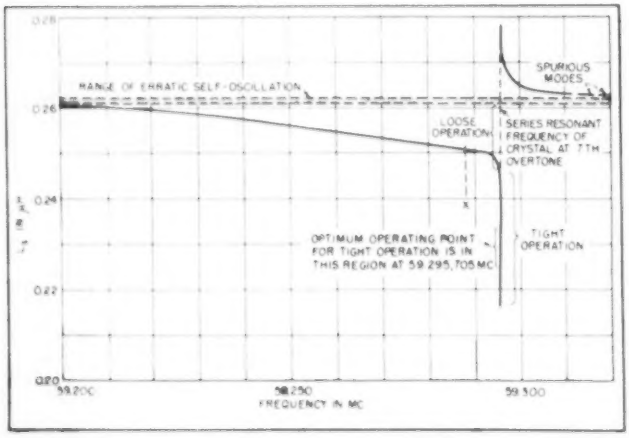

FIG. 6—Frequency characteristic at 7th overtone (59,295,705 mc) of quartz crystal having natural frequency of 8,478,094 mc, operating in 6J6 circuit

tically zero and the total reactance approaches infinity. This value f_1 is the fundamental frequency value stamped on the crystal holder, and represents the crystal in its usual circuit, not the crystal alone.

The fundamental crystal oscillator frequency f_1 is only slightly higher than the resonant frequency f of the crystal itself without holder or circuit. Due to the large ratio between C_T and C, slight changes in C_T have but a small effect on the oscillator frequency f_1, hence the conventional oscillator circuit has good frequency stability.

Now suppose that we add capacitance across the crystal. This causes the curve for Y of C_T in Fig. 3B to rise higher, so that Y_T crosses the X axis at a lower frequency and thereby makes f_1 approach f. Adding to C_T thus lowers the fundamental frequency of the crystal oscillator circuit slightly. This characteristic is widely used by engineers of radio and television stations for adjusting their carriers exactly to the assigned frequency. However, adding to C_T causes the impedance of the tuned grid circuit (comprising the crystal and circuit capacitance) to decrease. The result is lowered output, and added capacitance thus produces only a small frequency change while at the same time reducing output considerably in a conventional crystal circuit.

This brief review of crystal oscillator theory sets the stage for an explanation of how a crystal can be made to operate directly on an overtone in essentially this same circuit.

Overtone Operation

If a 10-mc crystal is used in the circuit of Fig. 2 as before but the plate circuit is tuned to approximately 30 mc, the value of C_T remains about the same as before, but the equivalent C of the crystal becomes approximately one-third of what it was at the fundamental. The equivalent L of the crystal is likewise reduced to approximately one-third. The ratio of C_T to C now is approximately three times that of the circuit at the fundamental, just as if we added capacitance to C_T at the fundamental.

Referring back to the values of the example, tuning the plate to approximately 30 mc so the crystal operates on its third overtone has the effect of adding capacitance of about 3 × 35 $\mu\mu$f across the crystal at the fundamental. The result is that the 10-mc crystal operates on its third overtone just as though it were a 30-mc crystal, except that now we have a low-impedance grid circuit and greatly reduced output.

When the plate circuit is tuned to the 5th overtone (about 50 mc in this example), the value of C_r again remains essentially the same as at the fundamental but C drops to about one-fifth of what it was at the fundamental. As a result the ratio of C_r to C goes up still more, the grid circuit impedance gets still lower, and power output drops practically to zero. Above the fifth overtone, the circuit will not oscillate at all.

Overtone Circuit Requirement

An oscillator circuit that will permit crystals to operate on high-order overtones must have a high grid-circuit impedance. One way of achieving this impedance is to utilize the ability of a piezoelectric crystal to appear as a capacitive impedance when energized at a frequency below the series resonant frequency of the crystal L and C. The crystal can then combine with an input circuit that is inductive to form an antiresonant grid circuit having high impedance as desired.

To make the input circuit appear inductive, the normal circuit capacitance C_r is shunted with an inductance of such value that the combination of the two appears as a high-value inductance at the operating frequency of the crystal.

The curves in Fig. 4 show how addition of shunt inductance L_s affects the susceptance and reactance of the crystal oscillator circuit of Fig. 3. The total susceptance Y_t of the grid circuit is added to susceptance Y_{Ls} of the new shunt inductive reactance to get curves Y_{Tt} for the combination. The resulting reciprocal curves (X_t of Y_{Tt}) in Fig. 4B are the reactances of the combined input circuit without taking into account the values of resistance in the circuit. The curves indicate that two antiresonant frequencies are possible, f_a being above and f_b being below the series resonant frequency f of the crystal at the overtone selected. Actually, only f_b is obtained in practice, because at that frequency the grid circuit has maximum impedance. The curves are intended to show only a method of obtaining a high grid circuit impedance (X_t of Y_{Tt}) at operating frequency f_b, hence are not drawn to scale.

An overtone crystal is operated in the capacitive condition rather than in the inductive condition as is usual practice at low frequencies, for one important reason. AT or BT-cut crystals when flat or convex, as are most crystals, have spurious modes or activity points above the natural frequency of the crystal. This often results in erratic operation when the circuit is operated at crystal overtones in the inductive crystal condition. By deliberately choosing the capacitive crystal condition, operation is below the natural frequency of the crystal (or below the corresponding value for overtones) and spurious-mode operation is almost impossible.



FIG. 7—Variation of frequency with temperature for 9th overtone at 77 mc, for typical overtone crystal operated 7.5 kc below series resonant frequency to permit frequency modulation

Overtone Oscillator Data

The curves in Fig. 5 show the characteristics of an overtone crystal calibrated, ground and finished to operate on its 9th overtone at 76.339,060 mc. The exact frequencies of this crystal operating at its many other overtones are tabulated, along with the differences between these overtones and the multiples or harmonics of the 8.478,094-mc fundamental crystal frequency.

The amount of inductive reactance needed to provide operation at the many overtones of this crystal when in the capacitive condition is also shown, along with the power output and efficiency of a test oscillator at each overtone. The plate tank circuit in all cases was inductively coupled to a Bird Termaline wattmeter for power measurement. Wherever possible the plate power input to the test oscillator was kept constant at the different overtones.

The results shown in Fig. 5 indicate that an overtone crystal can meet all of the requirements of a crystal oscillator of the power type up to the 11th mode. Such a crystal is satisfactory up to the 15th mode for a receiver local oscillator since such an oscillator has lower power requirements.

The overtone values of a crystal are not always fixed. Those given are for optimum operating conditions, but can easily be shifted to slightly higher values or considerably lower values by changing the value of shunt inductance L_s with a slug or other means. A study of the frequency characteristics at one overtone, the 7th, is shown in Fig. 6. The nominal or optimum overtone value is approximately in the middle of the vertical portion of the curve, corresponding to about 0.23 μh for L_s. Decreasing L_s from this value lowers the output but increases the frequency only a little.

Increasing L_s has a similarly negligible effect on frequency up to the knee of the curve, but further increases in L_s then make the overtone frequency decrease appreciably. The relation is quite linear, hence frequency modulation becomes a simple matter.

It should be pointed out that L_s can be a fixed inductance smaller than needed, shunted by a trimmer capacitor that is used for adjusting the operating frequency near the selected overtone.

Frequency Modulation

To produce frequency modulation, L_s is set to a value in the linear range such as at X, and a reactance tube or other variable reactance is connected across L_s to sweep its inductive reactance above and below the value for point X. Crystal frequency follows the varia-

tions in the reactance, giving the desired frequency modulation. Point *X* is here about 7.5 kc below the nominal overtone value, but the frequency excursion would be limited to about ±5 kc in order to stay off the knee of the curve. In a uhf or vhf f-m transmitter, multiplier stages following the overtone oscillator would multiply this 5-kc deviation of the oscillator. Point *X* is still a stable crystal frequency but one that can be caused to change because the magnitude of change needed is not too great.

Greater frequency deviations could be obtained by moving point *X* further away from the knee of the curve, but circuit stability is then sacrificed. For this reason, overtone oscillators in f-m transmitters use relatively small crystal frequency swings and rely on frequency multipliers to provide the required deviation at the final carrier value.

A "tight" overtone crystal oscillator is defined as one that is operating over the nearly vertical portion of the curve of Fig. 6. Operation at other points on the curve is described as "loose," permitting adjustment of the output frequency or frequency modulation.

Stability

In the tight positions the temperature-vs-frequency stability of the overall circuit essentially is that of the crystal. However, in almost all loose positions the output frequency can be corrected by proper choice of temperature coefficients for components to result in an overall temperature-vs-frequency stability that is considerably better than that of the crystal itself. This is illustrated in Fig. 7; the entire curve is below the coefficient of the crystal itself, which is approximately 1.0 part per million per degree C.

Voltage stability of a typical overtone crystal oscillator operating at the 9th overtone at 77 mc is illustrated in Fig. 8. Even for the total 70-volt plate-voltage change represented by the entire curve, voltage stability is excellent with circuit component values shown.

Since the crystal frequency can be caused to change, a deliberate change by some element such as the plate bypass capacitor can, if that element is of the proper coefficient and size, correct the entire circuit for effects of temperature variations. Overtone crystal circuits have been produced which will maintain the frequency to better than one part per million over a temperature range of 0 to 185 F, which is many times better than the crystal itself in normal circuitry.

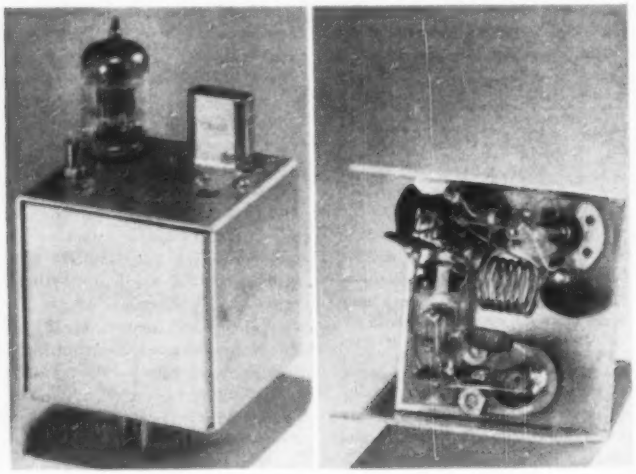

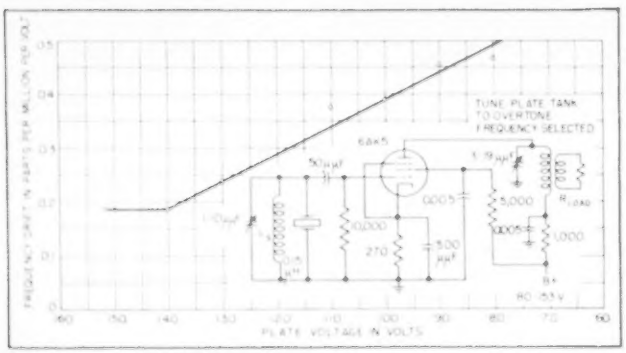

FIG. 8 Overtone crystal oscillator constructed as plug-in unit. Overtone frequency is 77.00 mc. which is 9th overtone of crystal having fundamental of approximately 8.55 mc. Power input is 1.8 watts and power output 0.3 watt for 150-volt plate supply. Curve shows stability of output frequency over 70-volt variation of plate voltage provided by external power supply

F-M Version

A study of Fig. 6 shows that if the circuit is frequency-modulated, large excursions of the variable reactance can cause the crystal to stop oscillating at either extreme of the change. If L_c is reduced below a certain critical value (about 0.215 μh in this case), the circuit stops oscillating. If L_c is increased above another critical value, the circuit goes into erratic self-oscillation. With further increases in L_c, the circuit will change over to a type of oscillation in which the crystal appears as an equivalent inductance, represented by the curve at the upper right. With still further increases, above about 0.27 μh, the circuit ceases oscillation.

A form of automatic deviation control becomes necessary to maintain assigned channel bandwidth and to make impossible the stopping of the oscillator with excessive amplitudes of the modulating voltage. Figure 9A shows a typical reactance modulator used with an overtone crystal oscillator, while

Fig. 9B shows the resultant injected capacitance C_i of the modulator circuit. Slight modifications in the circuit result in the C_i/E_g curve shown in Fig. 9C. By operating such a revised circuit at point X with no modulating voltage applied, and coupling that modulator through fixed-capacitor C of a value substantially equal to C_i at point X, the resultant C_i at the crystal appears as in Fig. 9D. The value of C_i then can vary between two limits, one of which is zero and the other the value of C. Such a simple automatic deviation control circuit holds the frequency excursion to definite limits. Even the failure of the modulator tube can only cause frequency changes that are within the channel assigned.

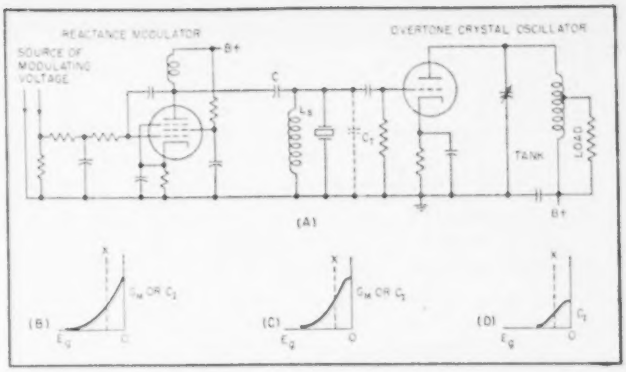

FIG. 9—Frequency-modulated crystal oscillator using overtone crystal, and curves showing injected capacitance provided by reactance modulator under various conditions

Crystal Heating

At the frequencies under consideration (70 to 110 mc, corresponding to the 7th, 9th or 11th overtone of a 10-mc crystal), the usual grid-to-plate capacitance of small triodes such as the 6C4 and 6J6 provides feedback that can be excessive. The rapid change in frequency which often occurs in the first few seconds after starting a crystal oscillator usually is the result of heating of the crystal due to excessive feedback and resultant high r-f voltage across the crystal electrodes.

In all antiresonant circuits the crystal is a capacitance with the quartz as a dielectric. Excessive r-f voltage across this capacitance will cause undue heating of the crystal which the holder cannot dissipate. The feedback should therefore be controlled to a point where only enough excitation is provided to permit satisfactory output from the circuit.

The use of a pentode or similar tube with properly adjusted feedback results in highly stable circuits with little crystal heating. Feedback adjustment is experimentally determined and subsequent production of oscillators for any given overtone of operation simply provides a fixed spacing and form factors of grid and plate coils.

Since an overtone crystal operates directly on its overtone value, with no output at the fundamental, sideband problems are practically nonexistent. For example, if a crystal is operated on its 9th overtone at 90 mc and fed to a doubler and tripler to get 540 mc, the lowest undesired component that can produce sidebands at 540 mc is 90 mc. This is too far off from the carrier to be of any consequence in properly designed circuits.

With conventional frequency multiplication to 540 mc from a 10-mc fundamental, sidebands removed from the carrier frequency by a value equal to the fundamental or double or triple the fundamental value are present in the output of the final stage. Frequency multiplication from a fundamental in both transmitters and receivers is thus a serious deterrent to close spacing of uhf channels.

Conclusions

Equipment using circuits meeting all of the requirements for both transmitting oscillators and local oscillators of receivers has been in operation over 18 months. Performance during that time has been entirely satisfactory for mobile and fixed station uses. Fixed stations in extremely unfavorable locations, such as on oil drilling rigs, have proven the circuits to be stable, efficient and adequate for all purposes investigated. The circuits operate at conservative values of plate voltage, plate current and plate dissipation, so that long and stable tube life can be expected.

The audio quality resulting from the frequency-modulated oscillators is exceptionally good and approaches that obtained by f-m broadcasters. It is dependent only on the small speech amplifier used ahead of the modulator and the point on the curve chosen to operate the crystal. Actually, the crystal may be modulated with d-c applied to the modulator grid, which causes instantaneous frequency shift in a direction depending on the polarity of the modulating voltage. The amount of the shift is determined by the limiting values in the circuit and the amplitude of the modulating voltage.

For cooperation in developing and testing the crystal overtone oscillators described here and for work leading to patent applications, the author expresses appreciation to A. R. Panetta, now with Boston University, and to R. C. Blauvelt and R. N. Lister, chief engineer and plant superintendent, respectively, of Electronic Research & Mfg. Corp.

Bibliography

William A. Edson, High Frequency Crystal-Controlled Oscillator Circuits, Progress Report No. 2, 1948, Signal Corps Project 142B at Georgia Institute of Technology, Atlanta, Ga.

W. P. Mason and I. E. Fair, A New Direct Crystal-Controlled Oscillator for Ultra-Short-Wave Frequencies, *Proc. IRE*, 30, 464, 1942.

H. Goldberg and E. L. Crosby, Series Mode Crystal Circuits, *Tele-Tech*, p 24, May 1948.

B. E. Hill Jr. and S. L. Kenyon, Investigation of Oscillator Circuits for Use With CR-9/U Over-Mode Crystal Units, Naval Research Laboratory Report No. R-3158.

F. Butler, Series Resonant Crystal Oscillators, *Wireless Engineer*, June 1946.

J. K. Clapp, A Crystal Mode Indicator, *The General Radio Experimenter*, p 1, Feb. 1949.

F. E. Terman, "Radio Engineers' Handbook," McGraw-Hill, 1943, p 493; Fig. 12 shows positioning of spurious modes of quartz crystals.

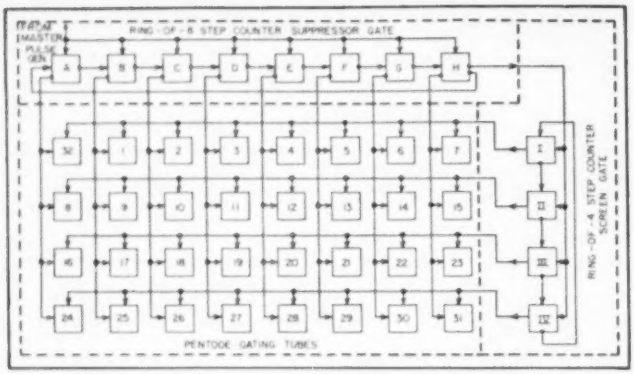

FIG. 1—Ring-of-8 and ring-of-4 counters feed coincidence voltages to screens and suppressors of pentode gating tubes



Master pulse generator operates the ring-of-8 counter chain

32-Channel High-Speed

System employs binary counters and a network of coincidence gating tubes to commutate 32 channels of information with essentially negligible switching time. Substitution of thyratrons in counting circuits reduces power supply requirements at some sacrifice in switching speed

HIGH-SPEED electronic commutators are inherently complex, especially when designed to have a negligible switching interval. Simplicity and straightforwardness are essential in reducing initial cost and servicing requirements.

In the 32-position commutator described here, almost 100 percent of the switching time is available for signal information. A minimum of tubes and components is used, and sampling rates of 1,000 cps may be obtained.

Binary System Used

For a given count, a binary counter uses a minimum number of tubes. If a binary counter were employed to obtain a count of 32, this could be done by making use of the fact that $2^5 = 32$ and only 5 double triodes would be required. However, to make use of this counter, coincidence gating would be employed. A gating tube having 5 separate grids plus a signal grid in addition to plate, cathode and heater would be required. There is no such tube commercially available. Even if one were obtainable, the interwiring problem would be unnecessarily complicated.

A practical 32-position commutator system employing a ring-of-8 combined with a ring-of-4 step counter can be used to coincidence gate the suppressor and screen respectively of the readily obtainable miniature type 6AS6 pentode. This requires only 12 counting tubes as compared with 32 formerly required, and the interwiring problem is comparatively simple.

A block diagram of a 32-step commutator using a ring-of-8 combined with a ring-of-4 step counter is shown in Fig. 1. If a 1,000-cps sampling rate is desired, the master pulse generator runs at 32,000 cps and operates the ring-of-8 step counter. After every 8th count, a pulse is sent from *H* to the ring-of-4 step counter and advances it from I to II, II to III, and so on. The ring-of-8 runs at 4,000 cps, while the ring-of-4 will run at 1,000 cps.

The outputs of the two ring counters gate the screen and suppressor respectively of the 32 gating tubes, as shown in Fig. 1.

By referring to the relative pulse outputs of the ring-of-4 and ring-of-8 counters shown in Fig. 2, it can be seen that the screen and suppressor pulse on any one gating tube will be simultaneously positive only once every 32 counts. Since any gating tube must have a coincidence of positive pulses at both suppressor and screen in order to conduct, a 32-position commutator results.

When such a sytem is used with an *n* position commutator, it can be shown that the minimum number of counting elements will result if $\sqrt{n}$ counts are placed in each step counter. This of course can only be done if *n* is an integer. As an example, in a 36-position commutator, two ring-of-6 step counters could be used, or a total of 12 tubes. A 100-position commutator requires two ring-of-10 counters, or a total of 20 tubes. If *n* is not an integer, the number of tubes in each counter should be chosen so that their product is *n* while their sum is a minimum. For the 32-position



Under-chassis components are potted in a thermosetting plastic

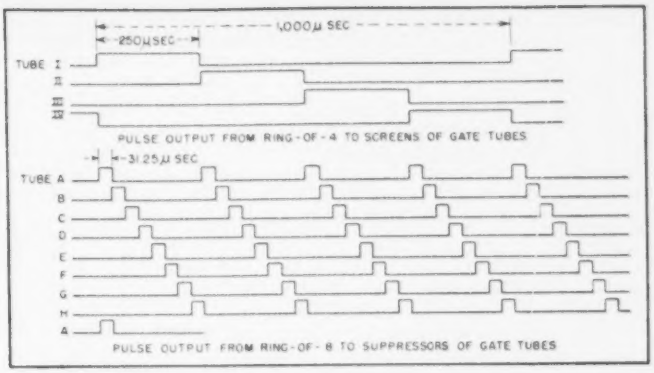

FIG. 2—Each gating tube is turned on for 31.25 microseconds once every millisecond by the ring-of-8 and ring-of-4 counter circuits

Commutator

By NORMAN ALPERT, JOSEPH LUONGO and WARREN WIENER

Servo Corporation of America
New Hyde Park, N. Y.



Vacuum-tube commutator chassis samples 32 channels at a rate of 1,000 cps

commutator previously described, $8 \times 4 = 32$ and $8 + 4 = 12$.

Vacuum-Tube Commutator

A schematic diagram of a 32-step vacuum-tube commutator using a ring-of-8 combined with a ring-of-4 step counter is shown in Fig. 3. Both step counters are composed of identical Eccles-Jordan flip-flop circuits using miniature 12AU7 tubes which are capable of speeds in excess of 200 kc. However, from the standpoint of negligible commutation interval and stability, the step-counter should not run at a rate much faster than 32 kc.

The ring-of-8 consists of stages *A* through *H*. Stages *B* through *G* have been omitted for simplicity—each of these stages is identical to stage *A*. The 32 gating-tube circuit numbers are shown in circles next to the signal input terminals in each case. Stages 2 through 6, 10 through 14, 18 through 22 and 26 through 30 have been omitted and they are identical to gating tube circuit 1. As indicated by the arrows, ring-of-8 counter stage *C* is connected to the suppressor grids of gating tubes 2, 10, 18 and 26; *D* is connected to 3, 11, 19 and 27, and so on. Horizontal rows of gating tubes have their screens gated by ring-of-4 counter circuits I through IV.

To obtain the 1,000-cps sampling rate, the master pulse generator supplies negative pulses of 32,000-cps repetition rate. These pulses trigger the ring-of-8 step counter to successive positions every 31.25 microseconds. After every eighth count, the trailing edge of the pulse from the counter tube *H* is differentiated, amplified and inverted by V_1 and negative pulses of 4,000-cps repetition rate are supplied to the ring-of-4 step counter. This counter is thus advanced successive positions every 250 microseconds.

Figure 2 is a graphic representation of the sequence of events. The outputs from the ring-of-4 are each used to pulse the screens of 8 gated miniature 6AS6 amplifier tubes. Coincidentally, the outputs from the ring-of-8 are each used to pulse the suppressors of 4 gated amplifier tubes, one in each of the 4 rows of 8 gated tubes connected to the ring-of-4 stepping counter.

Sequential Gating

By using stepping counters totalling 12 stages, 32 amplifier tubes are gated sequentially and a 32-position commutator is the result. In the circuit shown in Fig. 3, gating tubes numbered 1 through 30 sample 30 individual input signals. The 31st and 32nd gating tubes provide separate constant-amplitude synchronizing pulses through cathode followers V_{5a} and V_{5b}. If these synchronizing pulses are not required, the circuit is readily modified so that the 31st and 32nd tubes can sample 2 additional input signals.

As illustrated, the plates of gat-

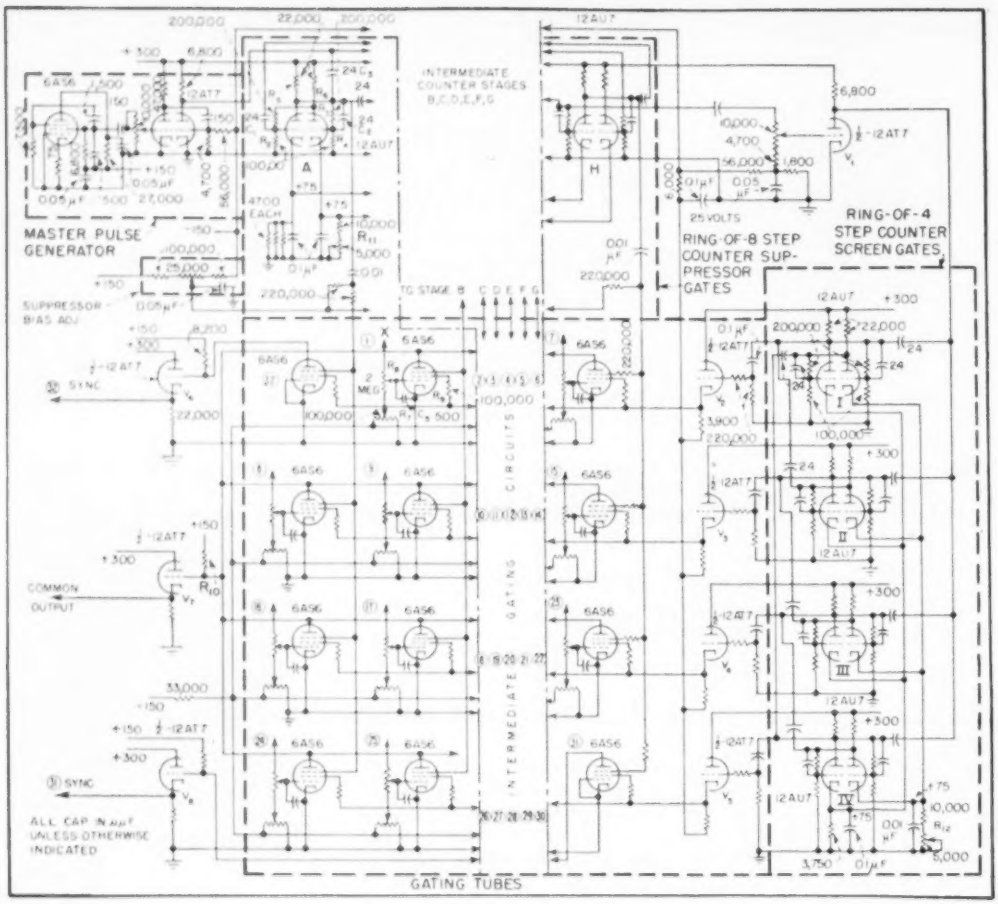

FIG. 3—Complete circuit of 32-channel electronic commutator. Five intermediate counter stages and twenty gating tube stages have been omitted. They are identical to companion circuits shown

ing tubes 1 through 30 are connected to a common plate load resistor R_a across which the combined commutated output is developed. This in turn is connected to cathode follower V_7 which provides a low-impedance output.

A typical gating-tube circuit such as No. 1 operates in the following manner. Gain control R_1 is adjusted for proper amplification of the signal connected to terminal X. Potentiometer R_2 sets the grid bias at a point in the middle of the linear portion of the dynamic curve in such a manner that the plate-voltage level is equal to all the pedestal levels of the other gating tubes.

The suppressor is normally held at cutoff by the common suppressor bias adjustment control while the screen voltage is normally −25 volts which also represents cutoff. In order for the gating tube to be turned on, the screen supply voltage, obtained from a cathode follower such as V_1, V_2, V_3 or V_4, becomes a positive pulse of about +100 volts which is applied to the screen through current-limiting resistor R_3. Simultaneously, the suppressor supply voltage obtained from the ring-of-8 stepping counter becomes a positive pulse of about 100 volts, thus driving the suppressor to saturation, and normal tube gain results.

The signal applied to the control grid will then appear across the common load resistor R_{10}. Capacitor C_1 attenuates any unwanted spikes which might be picked up by the control grid and thereby show up as fictitious signals in the combined output.

The ring counters shown in Fig. 3 are inherently very stable, require no components having close tolerances, will operate from an unregulated power supply and are not critical regarding trigger pulse waveform. Occasionally, over long periods of time, it may be necessary to adjust controls R_{11} and R_{12} in order to equalize the ring counter cathode voltages labeled +75 volts.

A detailed description of the operation of this circuit has been described previously in ELECTRONICS.[1]

Master Pulse Generator

The pulse generator used to operate the ring-of-8 counter employs a 6AS6 miniature pentode in a transitron oscillator circuit, as shown in the upper left hand corner of Fig. 3. The transitron oscillator is particularly adaptable as a pulse generator since crude pulses are generated at the screen of the pentode. Consequently less processing of pulse shape is required than with a conventional sinewave oscillator. Since the wave shape and amplitude of the pulse are dependent almost entirely on the R-C parameters, change in filament and electrode voltages will have slight effect on its operation.

The transitron screen output is differentiated and amplified by one-half of a 12AT7. The resultant signal is again differentiated and amplified by the second half of the 12AT7 to produce negative pulses of 120 volts peak amplitude, having a pulse width at the base of about 5 microseconds and a repetition rate of 32,000 cps as determined by the transitron oscillator. These pulses provide satisfactory operation of the ring-of-8 stepping counter.

Two photographs show the transitron pulse generator in which all components except the two tubes are potted in a thermosetting type of plastic to insure stability under adverse conditions of vibration and humidity.

Thyratron Commutator

A schematic diagram of a 32-step thyratron commutator using a ring-of-8 combined with a ring-of-4 step counter is shown in Fig. 4. Both step counters are composed of identical thyratron stepping counters using 2D21 thyratrons. Due to the deionization time of the thyratrons, the maximum rate at which this step counter can run with good stability is 16 kc, corresponding to a sampling rate of 500 cps.

A pulse generator (not shown but similar to the transitron pulse generator shown in Fig. 3) supplies positive pulses of 16,000-cps repetition rate. These trigger the ring-of-8 step counter to successive positions every 62.5 microseconds. The ring-of-4 counter operates in a manner similar to the vacuum-tube counter previously described. The outputs of the ring-of-8 and ring-of-4 counters are also applied to the 32 gating tubes as shown in Fig. 3.

The count is advanced by triggering one thyratron which in turn prepares the next thyratron for triggering and extinguishes the preceding thyratron by means of a 1,000-$\mu\mu$f capacitor connected between cathodes. The thyratron ring counters of Fig. 4 are very stable, require no components having close tolerances, will operate from an unregulated power supply and are not critical regarding trigger pulse wave form.

Application

Using stepping counters totalling 12 stages, 32 amplifier tubes can be gated sequentially to produce an electronic commutator which will be equivalent to a 32-position selector switch rotating at speeds of the order of 1,000 revolutions per second.

If vacuum tubes are used in the ring counter section of the commutator, switching speeds in excess of 200 kc can be obtained, but since one half section of each counter tube is always drawing current, the continuous drain on the power supply is quite high. If thyratrons are used, only one thyratron is conducting at any one time and the drain on the power supply is negligible. However, to offset this advantage, the switching speeds of the thyratron ring counter cannot be much faster than about 16 kc due to the deionization time requirement.

An electronic commutator of the type described is superior to one in which a radial beam type of tube is employed in that almost 100 percent of the switching time is available for transmission of signal information and, in addition, it provides a more flexible and noncritical system.

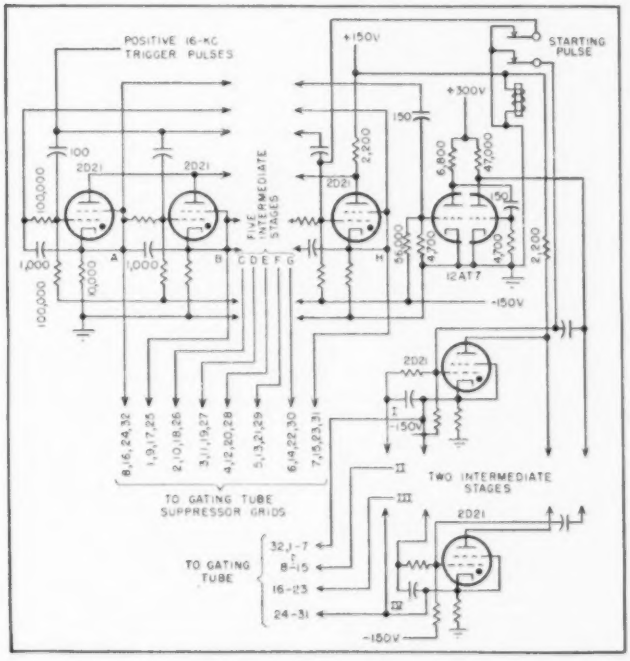

FIG. 4—Substitution of 2D21 thyratrons in counting stages reduces power supply requirements, since only one thyratron fires at a time. Sampling rate is reduced to 500 cps due to ionization time. Screen-grid leads to gates, lower center

Reference

(1) Richard Weissman, Stable Ten-Light Decade Scaler, ELECTRONICS, p 84, May 1949.

Production Experience

Problems involved in converting a mass-produced television receiver having an i-f at the old 20-mc RMA Standard and the modifications required to manufacture the receiver with the new 40-mc Standard. Field experience shows minimum interference problems

By D. W. PUGSLEY
Television Designing Engineer
Receiver Division
General Electric Co.
Electronics Park
Syracuse, N. Y.

USE OF a 40-mc intermediate frequency in television receivers eliminates or minimizes all the problems attendant to the older 20-mc i-f and presents relatively few new problems not encountered at the lower frequency.

This paper discusses a present-day television receiver that incorporates a 40-mc i-f, the problems encountered in putting this receiver into production, the problems encountered during production, and the field experience with this receiver. Discussion is limited to problems connected directly or indirectly with the i-f.

The receiver was originally built, in large quantities, with a 20-mc i-f. It was then converted to 40 mc and again built in large quantities. Thus, actual production experience with both frequencies on the same basic chassis has been experienced.

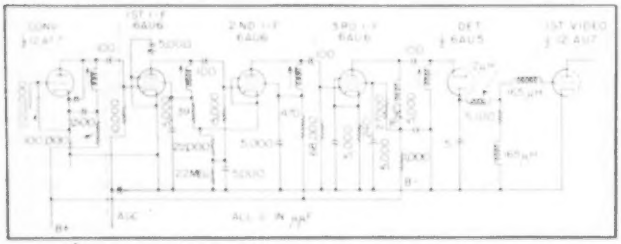

FIG. 1—Circuit of the 20-mc i-f amplifier first used in the receiver

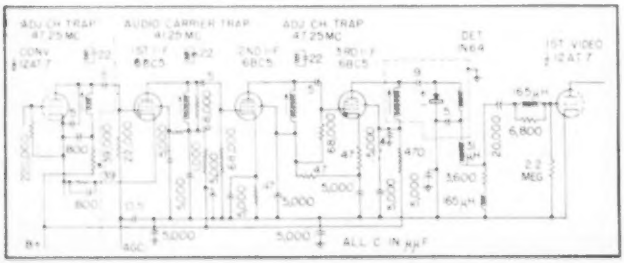

FIG. 2—Redesign for 40-mc operation involved changing tube type and adding traps

The chassis was originally brought out as model 805, an intercarrier receiver. For various reasons, the chassis was designed without a power transformer. Also, for U. L. reasons, the chassis was made cold, that is, not directly connected to the power line.

This receiver was put in production early in 1949. It was started with a 20-mc i-f because it was felt that not sufficient knowledge or experience with the 40-mc i-f was yet available. Also Major Armstrong still had a powerful f-m station broadcasting in the 40-mc region.

Change in production to the higher i-f was made after the Alpine f-m station had ceased broadcasting in that region. By this time several receivers had been built and field tested.

Much of the factory test equipment was converted during factory vacation shutdown. However, some duplication was necessary. For a period after vacation both frequencies were in use. Gradually, however, receivers incorporating the older frequency were built and shipped and only receivers incorporating the new frequency were left in production. The change in frequency was coordinated with a change in model numbers.

Simultaneously with the change in i-f, several other changes were made. These other changes tend to obscure, to some extent, a direct

with a 40-mc I-F Receiver

BACKGROUND

In 1945 the author, as a member of the RMA Television Receiver Committee, was appointed Chairman of the Subcommittee of Standards of Good Engineering Practice. This Subcommittee adopted an i-f of 21.25 to 21.9 mc for the sound i-f and 26.75 to 27.4 mc for the picture i-f.

Practical experience with the intermediate frequencies has been relatively good except for the problems engendered by oscillator radiation. In addition there have been several minor difficulties such as double conversion effects, direct i-f interference from amateurs, industrial equipment, international short-wave stations, and f-m station image interference.

The problem of oscillator radiation became so severe that in April 1948 the Television Receiver Committee met and rescinded its recommended standard i-f.

The author became chairman of a special task force which restudied the problem. Foremost among those involved in this study were John D. Reid and P. G. Holst. One year later, the Task Force recommended an i-f of 41.25 mc for sound and 45.75 mc for the picture. This was subsequently adopted as a standard by RMA

comparison of the before-and-after receiver. In the ensuing discussion, such factors will be mentioned and their effect eliminated from the comparison as nearly as possible.

Circuit Changes

Figure 1 shows a schematic diagram of the 20-mc i-f amplifier. Three stagger-tuned stages incorporating 6AU6 tubes were used.

Figure 2 shows a schematic diagram of the 40-mc i-f amplifier. Again three stagger-tuned stages are incorporated, but the tubes have been changed to type 6BC5.

The most difficult part of this development was to make the amplifier stable and symmetrical with all values of age or contrast bias. This problem was aggravated by the fact that a transformerless cold-chassis receiver was involved. The fact that the problem was satisfactorily solved at 40 mc in such a receiver should lend encouragement to those engineers intending to develop a 40-mc i-f strip.

Figure 3A shows the i-f bandpass curve shape for the 20-mc amplifier at various values of bias voltage. The scale for the ordinates has been adjusted for each curve so that the curves may be laid on top of each other. It can be seen that this curve holds together fairly well, although it is certainly not perfect.

Figure 3B shows the bandpass curve shape for the 40-mc amplifier, again at various values of bias voltage. It shows that even better results were obtained than for the 20-mc amplifier.

These curves were taken on receivers built on the production line, and are fairly typical of average production. It should be pointed out, however, that at the start of the production lines not all receivers came out this well. A great deal of effort was expended on tracing down the variables before uniformity of production was achieved.

The cures adopted were the usual sort of things, such as very short lead lengths on certain critical bypass capacitors, bypassing to the right spots, elimination of common impedances, and so on. Very little shielding was actually necessary.

Gain Tests

To obtain realistic comparative gain measurements the following technique was adopted. Figure 4 shows the connections to the converter grid. First the r-f amplifier and oscillator connections were removed. Then the signal generator was connected to the grid through a 100-$\mu\mu$f capacitor. A bias of -2.5 volts was placed on the grid through 220,000 ohms.

A microammeter was placed in the second detector load circuit to measure output. The age voltage was removed from all i-f stages and

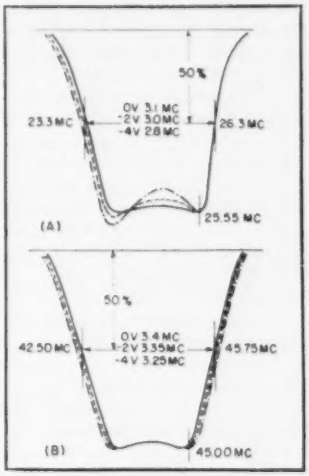

FIG. 3—Bandpass curves for the two amplifiers



FIG. 4—Arrangement of circuit for measuring gain

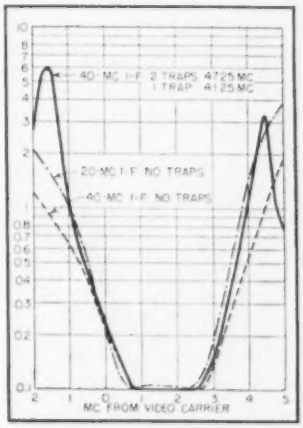

FIG. 5—Superimposed selectivity curves for direct comparison

a bias of −1 volt applied to all i-f tubes.

Using this technique, a gain of 66.4 db was measured for the 20-mc strip, and a gain of 69.4 db was measured for the 40-mc strip. Thus the gain of the 40-mc i-f amplifier was actually 3 db greater than the gain of the 20-mc amplifier.

The bandwidth of the 40-mc amplifier was made greater than the bandwidth of the 20-mc amplifier, being 3.0 mc at 20 mc and 3.25 mc at 40 mc. The increased gain and bandwidth were due to the change in tube type. Although this added to the cost of the receiver, the increased performance was felt to be worthwhile.

When the frequency was changed one own-channel sound trap and two adjacent-channel sound traps were added. These traps were all simple fairly low-Q traps for economy and to fit available space. The net result of this addition was that the adjacent-channel sound trap-page was increased from 24 db to 35 db.

The selectivity curves of the 20-mc amplifier and of the 40-mc amplifier, with and without traps, are superimposed on each other in Fig. 5. The frequency scale is altered to show megacycle spacing from the video i-f carrier. Probably one of the added traps can be charged to improved performance, the other two being necessary to obtain equivalent performance.

One anticipated difficulty with the higher i-f was regeneration on channel 2 but the problem was solved without the necessity of adding neutralization to the 12AT7 converter tube. Figure 6 shows the converter plate circuit, and, as shown, no neutrolizing coil is used.



FIG. 6—Final converter does not require neutralization

Shown for cost comparison, a 20-mc i-f coil is at left and a 40-mc coil with added trap at right

This may or may not be true for some other tube.

Field Experience

Another of the anticipated difficulties was second harmonic i-f interference in channel 6. The second harmonic of the sound i-f is at 82.5 mc, which is ¾ of a megacycle below the picture carrier of channel 6. It was found possible to reduce the interference to a non-objectionable degree without elaborate precautions. The level of the interference was found to be roughly comparable to the level of third-harmonic i-f interference previously encountered with the 20-mc i-f on channel 5.

Another anticipated difficulty was that of direct i-f interference. Experience over a nine-month period has shown less difficulty with this i-f than with the 20-mc i-f. Very few actual cases of such interference have thus far been reported. In all cases the difficulty was solved with an i-f trap in the antenna lead-in.

Experience with this chassis shows that it may not be necessary to install an i-f trap in every receiver, but traps could be service parts, to be installed when and where necessary.

A 40-mc i-f receiver was subjected to intense 27.12-mc radiation alongside a diathermy unit by a large manufacturer of such equipment. This test was made by him because of the large number of complaints he had received due to his equipment causing tvi. As could be expected, during prolonged tests there was no sign of tvi.

UHF Provision

Combination vhf and uhf receivers would require an i-f higher than 20 mc. If the same i-f is to be used for both services, the highest practical one is 40 mc, unless one resorts to double conversion or some other stunt not normally employed. This i-f will be very practical at uhf, especially if the FCC follows the recommendation of RMA and JTAC that the allocation plan provide image protection for such an i-f.

Double-conversion problems exist at 40 mc as well as at 20 mc however; head end design must take this possibility into account.

One of the severe image problems encountered with the 20-mc i-f is caused by f-m stations being on the image of channel 2. This particular image problem is entirely eliminated at 40 mc. An image problem of similar magnitude at 40 mc has not been experienced.

One anticipated benefit was the elimination of interference between television receivers due to oscillator radiation. This result has been very satisfactory.

Extra Cost

The changeover from three 6AU6 i-f tubes to the 6AG5 type and later to 6BC5's resulted in a cost increase of 30 cents. At the same time, some increase in gain was obtained.

The cost of two traps should be charged to the conversion to 40 mc. The photograph shows a comparison of the 20-mc i-f coil without the trap and the 40-mc coil with the trap. The cost differentials may be judged from the illustration.

In addition there are five more capacitors used in the 40-mc amplifier, between the converter and second detector. Some of these may be charged to the change in i-f and some to improved performance and stability.

MICROWAVE SWEEP GENERATOR

Motor-driven plunger-cavity arrangement provides continuous klystron output from 2,600 to 3,400 mc at a sweep rate of 8 to 10 cps. Permits oscilloscope indication of match between wide-band traveling-wave tubes and transmission lines

By L. COBURN EISAMAN
Sylvania Electric Products, Inc.
Bayside, N. Y.

Microwave sweep generator facilitates adjustment of matching between wide-band tubes and transmission lines

THE SWEEP OSCILLATOR described here was developed to aid in the study of matching between traveling-wave tubes and transmission lines over a wide frequency range in the 10-cm region. Through its use, much valuable time is saved by providing continuous indication on a cathode-ray tube, rather than the time-consuming process involving point-by-point measurements with a manually-tuned signal generator.

During the course of development, attempts were made to use paddle arrangements in waveguide-type cavities. These did not give enough bandwidth, and the tracking of reflector voltage proved very difficult or impossible to achieve.

To provide adequate bandwidth, a sweep oscillator was built using a type 6BL6 reflex klystron[1]. This tube is designed for broad-band operation in a single mode over the range of 2,000 mc to 4,000 mc in a coaxial resonator cavity.

Cavity Resonator

The cavity used has a noncontacting plunger which is mechanically driven at the desired sweep frequency. The plunger clears the inner and outer conductors of the cavity by about 0.01 inch, as shown in Fig. 1. Spacing is maintained by three small rollers mounted directly behind the plunger and riding on three flats cut on the outside of the inner conductor. Another set of rollers ride outside the cavity. Springs give the plunger a degree of mechanical rigidity without impairing its back-and-forth motion. The rate of sweep, 8 to 10 cps, is

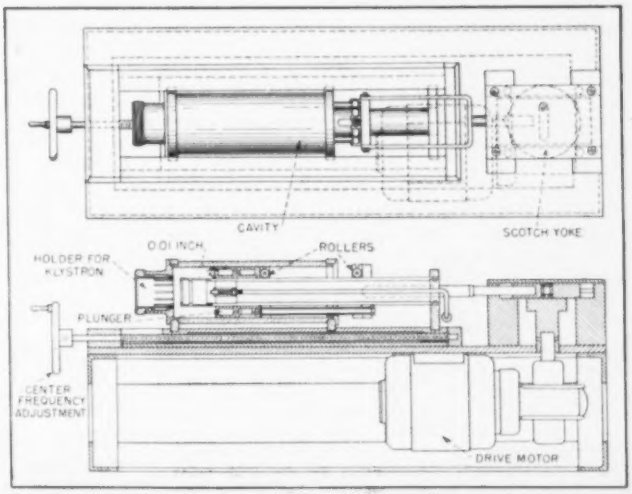

FIG. 1—Mechanical details of 2,600 to 3,400-mc klystron sweep generator

Work done under Bureau of Ships Contract No. NObsr-53166

low enough to prevent whipping, but high enough to provide continuous oscilloscope indication.

The cavity is operated in the $\frac{1}{2}\lambda$ mode. The sweep from 2,600 to 3,400 mc requires a wavelength change of 2.78 cm and, therefore, the plunger displacement is 0.75 × 2.78 cm or approximately 0.93 inch. The plunger is driven by a scotch yoke operated by a 1 7-hp, 5,000-rpm universal motor with a 10-to-1 speed reduction gear. Motor speed is controlled by means of a variable transformer. The motor output shaft runs at about 260 rpm to give the correct sweep rate. The scotch yoke converts rotational motion into simple harmonic motion of the plunger.

Reflector Voltage Tracking

The klystron reflector voltage has to be varied as the frequency is changed to maintain oscillation over the desired range, as indicated by the reflector-mode characteristics in Fig. 2. In sweeping from 2,600 to 3,400 mc, the reflector voltage (working on the center line of the $2\frac{1}{4}$-mode area) must be increased from about 90 volts to 175 volts. If maximum power output at all frequencies were desired, the reflector voltage would have to follow this center line curve exactly. In this application, where the sweep length is relatively short, the voltage is varied linearly (with respect to wavelength) and stays well within the limits of the $2\frac{1}{4}$-mode area.

The linear relation is obtained by a small a-c generator coupled to the output shaft of the motor that drives the scotch yoke. The generator is excited by a 6-volt battery and produces one cycle of sinusoidal voltage per revolution of the motor. Thus the a-c voltage generated bears a linear relationship to the wavelength of the cavity resonator. The generator stator can be rotated by hand to obtain proper phase between a-c voltage and plunger displacement.

At such a low speed the output voltage provided by the a-c generator is only of the order of one volt rms. This output voltage is stepped up by a two-stage capacitance-coupled amplifier to provide the voltage required to track the reflector over the required range.

The d-c component of the reflector voltage is taken from a regulated supply and the a-c output of the amplifier is fed through a capacitor to the reflector. Since the cavity is at ground potential and the voltage is applied between cathode and reflector, the reflector supply is not grounded.

Circuit Connections

The block diagram in Fig. 3 shows how the complete circuit is connected to the klystron. The reflector sweep voltage also provides a synchronizing voltage for the X-axis of the oscilloscope used to view the r-f output of the cavity. This gives a picture of r-f output versus wavelength since the tracking voltage is a linear function of wavelength.

Due to the off-ground feature of the sweeping voltage, the 60-cycle hum presents a problem. Filter capacitors placed between reflector

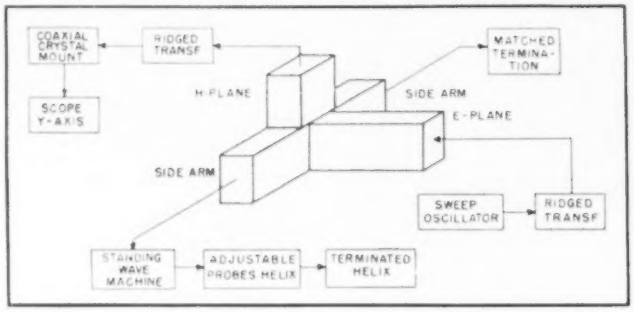

FIG. 4—Setup for studying match between broad-band microwave devices

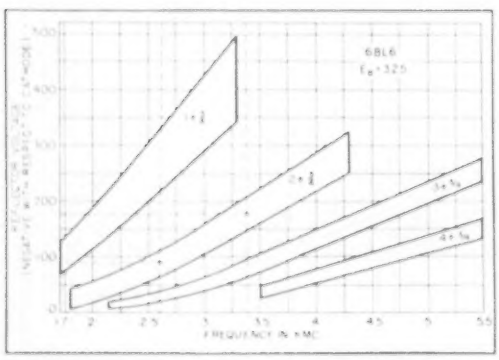

FIG. 2—Reflector-mode characteristics for the 6BL6 reflex klystron operating in a cavity resonator. The dashed lines show the frequency range usually swept

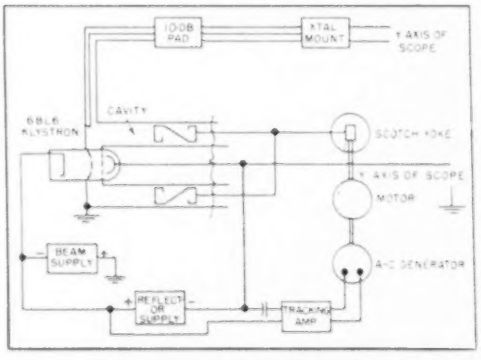

FIG. 3—Sweep oscillator block diagram. Reflector voltage is swept linearly with plunger displacement to maintain oscillation over the desired 800-kc range

and ground reduce the amplitude of the sweep voltage. The filtering finally adopted is a compromise between these two factors.

The r-f output from the cavity is fed through a 10-db pad before it is detected or fed to a piece of test apparatus. The padding matches the load to the cavity, thereby giving cavity and tube a better chance to provide a more constant output over the band.

The r-f power, whether it is the power reflected from some matching transformer or the complete output of the sweep oscillator, is detected by means of a 1N21B crystal diode mounted at the end of a coaxial line. The crystal mount is adjustable to present a good match over the band.

The output of the sweep oscillator is shown in an oscillogram which was taken directly from the cathode-ray oscilloscope during operation. The double trace is due to the fact that the power output at any frequency is not a symmetrical function of reflector voltage. When the cavity is tuned, say from the high-frequency end, the power output is one value; but when the cavity is tuned from the other direction, the power output is slightly different.

To overcome this reverse trace, one can short out the crystal on the return stroke by using a cam-operated switch. This also gives a zero output line that is useful for matching purposes.

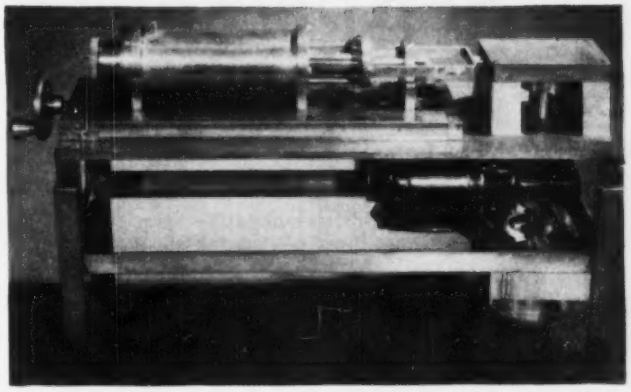

Motor-driven plunger sweeps cavity over wide range of frequencies in 10-cm region. Klystron pins are visible at left end of cavity

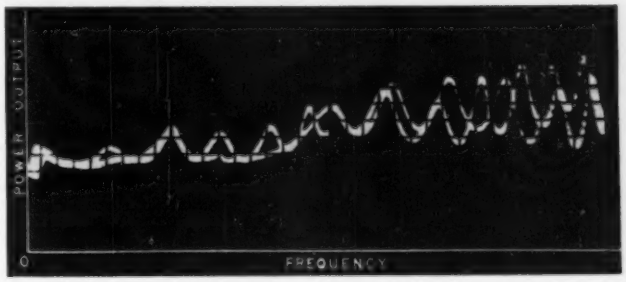

Double trace of output vs frequency oscillogram is due to asymmetry of reflector voltage-output curve

Application

The sweep oscillator is used to perfect matching sections between waveguides and helices in traveling-wave tubes, a magic tee being used for detecting the reflected power. The matching section is adjustable, and it is a simple procedure to perfect a match over the 800-mc range in a relatively short time.

The necessary equipment to do this is shown in Fig. 4. The parameters of the matching section are varied in such a fashion that the scope shows only a small amount of reflected power over the band.

This again is a compromise between a reasonably flat match over the entire band and a very good match over a much shorter band. Naturally, for broad-band work, the flat match is desirable.

From the trace on the oscilloscope one can estimate the amount of reflected power from the match by comparing it to a 100-percent mismatch. In practice such estimates have been correct within a few percent when checked by actual measurements of the voltage standing-wave ratio point-by-point over the band. The sweep oscillator has also been used to match into fluorescent noise sources and to check other broad-band equipment.

The sweep oscillator was designed to be as versatile as possible. The center frequency and, therefore, the whole band, may be changed by the handle shown in Fig. 1.

This moves the complete cavity so that the plunger displacement can be shifted all through the band of the cavity. Also, the same cavity with a different noncontacting plunger, operating in the $\frac{1}{4}\lambda$ mode, will generate power from 800 to 2,000 mc. The tube then employed would be the 6BM6 reflex klystron.

The author wishes to acknowledge the excellent work done by other members of the staff at these laboratories, particularly L. F. Ankersen, who did much of the actual mechanical designing, and W. Ramsey who designed and constructed the power supplies and the tracking amplifier.

Reference

(1) P. G. Bohlke and F. C. Breeden, External Cavity Klystron, Electronics, p 114, July 1947.

Shape Recording with

A memory system for automatic machinery uses pairs of square waves to record the effect of position on a magnetic tape. A servo system replacing customary metal cams is actuated by the varying positive-negative relationship to position the reproducing tool

By ROBERT R. PERRON

Research Division
United Shoe Machinery Corp.
Beverly, Mass.

IT IS USUAL PRACTICE in automatic machinery to use metallic cams as memory devices for shapes or patterns and as methods of moving mechanisms or work through predetermined paths. Cams are satisfactory and inexpensive in many applications and when made of metal they have the feature of being able to exert considerable force upon followers and mechanisms. However, the nature of cams is such that they are often not sufficiently adaptable.

In the development of automatic machinery, devices are often of interest that have greater flexibility than cams in the sense that the shapes remembered thereon are easily impressed and changed. These memory systems can be defined as a means whereby a function of space can be recorded and later reproduced. This article describes a flexible memory system for the recording and reproducing of shapes by means of a new type of magnetic-tape recorder.

Conventional Systems

Existing methods of recording intelligence in a magnetic medium, such as amplitude modulation, amplitude-modulated carrier and frequency modulation[1,2] do not provide sufficient accuracy for precise shape recording. Amplitude modulation, in which the intensity of magnetization varies in accordance with the intelligence, has inaccuracies that arise for the following reasons:

(1) Demagnetization of the magnetic medium carrying the recorded intelligence represents a loss of about 25 db in output[3] after the first few playings. It causes the output to deviate considerably from the input. Even though little further loss would be encountered after initial aging, a means for automatically compensating for this loss is required.

(2) Magnetic tape or wire wound on a spool encounters crosstalk between adjacent turns[3]. A section of strongly magnetized

HOW THE SHAPE RECORDER WORKS

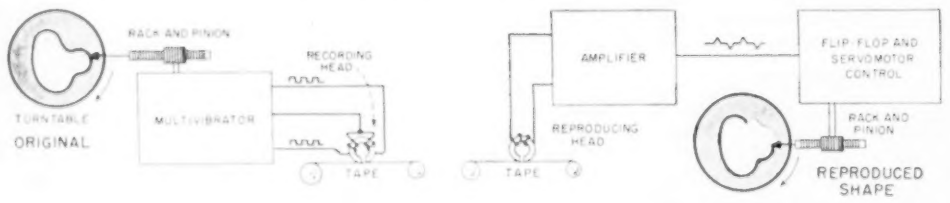

• **THE SHAPE** to be reproduced is fastened to a turntable that rotates at a constant, reproducible speed. A feeler, following changes in contour, actuates the multivibrator control through a rack and pinion. The multivibrator generates pairs of square waves of current. The ratio of the time length of the positive portion to the total length of a pair is proportional to the function being recorded. The square-wave pairs flow in sequence through a recording head and the resulting flux density is recorded on magnetic tape.

Pulses are used because with amplitude modulation, about 25 db of output would be lost after the first few playings. Frequency modulation is objectionable because speed changes result in amplitude distortion.

• **IN REPRODUCTION**, the head differentiates the recorded flux and the voltage peaks are fed to a flip-flop circuit that reconstructs the original square waves. A servomotor, driven in accordance with the conduction-time ratio, positions the stylus to generate a replica of the original shape.

The reproducing turntable must be driven at the same speed as the recording table, or, the relative speeds of turntable and tape must be maintained.

• **PRECISION** of reproduction is independent of playback velocity or changes in amplitude of the recording owing to demagnetization and crosstalk.

Ratio-Modulated Tape

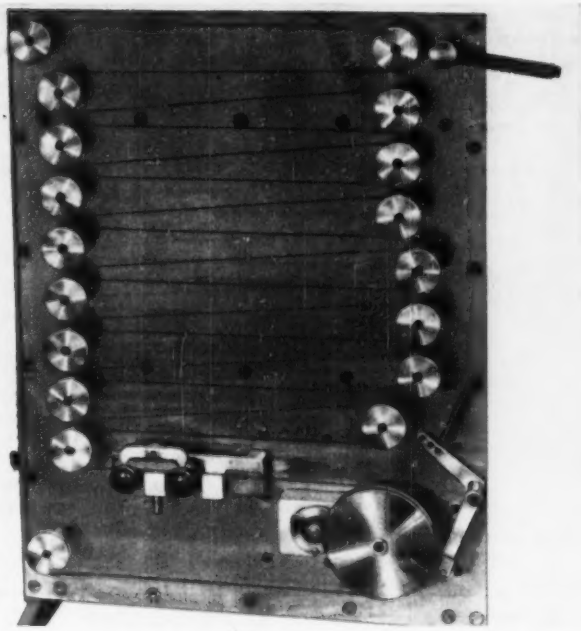

Endless-tape mechanism in which 24-foot tape repeats memorized orders to machine



FIG. 1—Ratio-modulated low-frequency square wave (A) and the instantaneous intelligence (B) appearing in a square wave modulated by a sine wave



FIG. 2—Recorder multivibrator actuated by the shape follower

medium tends further to magnetize or demagnetize an adjacent section and distortion results. With coated magnetic tape, however, this effect is small because of the large ratio of paper to magnetic medium.

(3) The voltage generated in a pickup head by a magnetic tape having a flux ϕ is

$$E = KVN \frac{d\phi}{dt} \times 10^{-8} \text{ v}$$

where N is the number of turns in the pickup coil and V is the tape velocity. Hence, when ϕ is constant, so that $d\phi/dt = 0$, we have $E = 0$; and, therefore, constant flux recorded on the tape would generate no voltage. It would, therefore, not be possible to reproduce constant current representing a cam dwell, that is, a portion of a shape having constant radii. A modulated-carrier system would overcome this difficulty but would still be objectionable for lack of accuracy.

Frequency modulation is objectionable because any changes in speed or flutter in the playback of the recording always results in amplitude distortion of the reproduced shape.

Ratio Modulation

In a ratio-modulated system, devised to overcome these weaknesses, the ratio of the positive pulse duration to the total period of a square-wave pair is caused to vary in accordance with the intelligence to be recorded. Such a ratio-modulated square wave is shown in Fig. 1. One period of the wave pair is $t_1 + t_2 = T = 1/f$. Since the square-wave amplitude is kept constant after reproduction from the magnetic tape, the intelligence (shown by the dashed line) is continuously proportional to the average value of the square wave, which equals the ratio t_1/T. Because the intelligence is given by a function of a time ratio, changes in tape speed or magnetization density have no effect on the fidelity of reproduction.

A simplified diagram of the recorder is shown in the accompanying box labeled "How the Shape Recorder Works" and a schematic of the recorder multivibrator is shown in Fig. 2. The multivibrator frequency is determined by the time constants of R_1C_1 and R_4C_2. It was chosen to be about 180 cycles. With R_1 and R_4 fixed, the conducting time of each tube is determined by capacitors C_1 and C_2. They comprise a pair of 430-$\mu\mu$f straight-line variable capacitors geared together in such a way that when the capacitance of C_1 increases that of C_2 decreases. The total capacitance, $C_1 + C_2$, remains constant and consequently the multivibrator frequency is kept constant as the capacitors are varied differentially. The capacitors are gear-driven by a rack that follows the periphery of the shape to be recorded. The function of R_2 and

R_1 is to eliminate high-frequency parasitics.

The recording method used in the apparatus is shown in Fig. 3. Since in this method the magnetic medium is always driven to saturation, the recording process simultaneously erases all previous intelligence on the tape.

A square pulse of current is allowed to flow through recording-head coil L_1 (Fig. 2) by conduction of multivibrator tube V_1. The magnetizing force is equal to magnitude *EF* in Fig. 3, and the tape flux density is carried up from point *O* to saturation at *A* on the magnetization curve *OA*. The square-peaked magnetizing pulse *EFGH* produces the flux pulse *LMNP* on the tape. Tube V_1 of the multivibrator then conducts at point *G* and almost instantaneously current ceases to flow through coil L_1 and flows through L_2. The current is caused to flow through L_1 in such a direction that the flux polarity in the recording-head gap is reversed from that generated by the current in L_1. This current reversal causes pulse *HIJK*. The induction decreases along *ACD* of the hysteresis curve and reaches a maximum when saturation again occurs at *B*. Current pulse *HIJK* produces the flux pulse *PQRS* and then the cycle repeats itself.

Advantages

An erasing head and oscillator are not necessary since the magnetizing force operating on the tape is made strong enough to align the magnetic domains of the tape in accord with the gap flux regardless of the previous tape history.



FIG. 3—Graphical analysis of the magnetizing effect of the ratio-modulated square wave

It is possible to derive a flux change from the tape at least twice as great as that obtainable from usual systems. This is possible since the magnetizing force is carried to tape saturation in a positive direction and then in a negative direction. As a result, the flux change is from *N* to *Q* in Fig. 3 whereas in a usual system, it would have a maximum change from *N* to *P*. A reproducing system with less gain can therefore be used.

Tape Drive

In the mechanism illustrated, approximately 24 feet of tape are driven over a series of idlers by means of a 4-inch-diameter driver. The tape is driven by a synchronous motor that maintains the tape speed constant at 1.25 feet per second. From a consideration of frequency response versus tape economy, this speed was found to

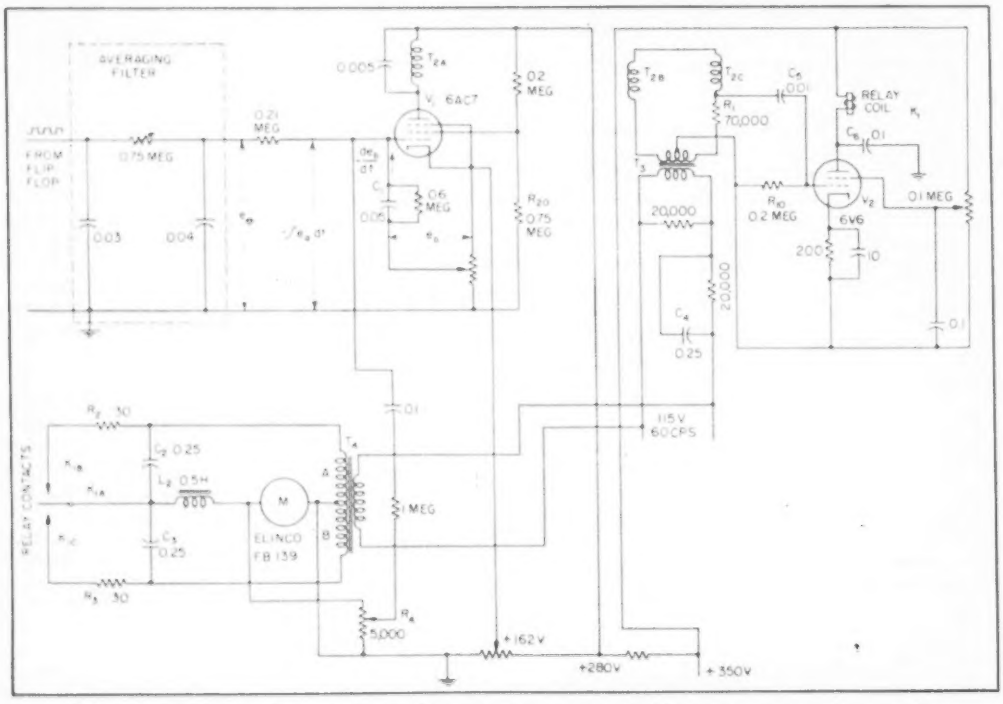

FIG. 4—Reproducing circuit that follows flip-flop wave shaper converts spiked signals to movement of servo stylus

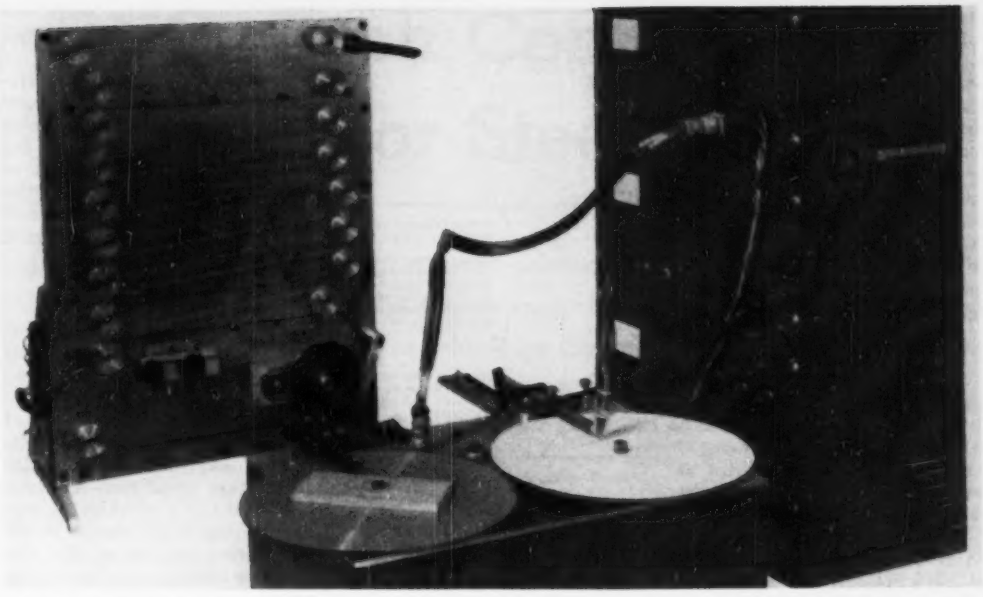

Complete shape-recording and reproducing apparatus in which a stylus duplicates the shape of a rectangular block of wood

be optimum, and was therefore chosen.

In application of this system, the tape is driven in synchronism with its associated machine. The important factor is maintenance of synchronism between the tape and machine speed so that at any instant a particular portion of tape is always associated with a particular angular position of the machine cycle. One method for maintaining synchronism is the use of a perforated tape sprocket-driven by the machine.

Reproducer

The intelligence carried by the tape in the form of square pulses of flux causes spikes of voltage to be generated by the reproducing head. Alternating positive and negative spikes are produced because the reproducing head differentiates the square pulses of flux. The peaks are amplified and their amplitude is adjusted to trigger the flip-flop circuit.

The function of the flip-flop circuit is to construct a square wave, which is a replica of the original square peaked current wave flowing through the recording head, from the reproducing head peaks. The flip-flop output is then passed through an averaging filter and finally to a servo.

Servomechanism

Since the end result desired with this recorder is to reproduce the recorded shape by means of a stylus, a servomechanism is required, as shown in Fig. 4. The servo input voltage e_s is impressed on the control grid of V_1. The plate current of V_1 flows through the primary T_{2A} of a saturable reactor T_2. The secondary coils T_{2B} and T_{2C} of the reactor and connected to a source of a-c voltage from T_3. The reactor secondary coils T_{2B} and T_{2C} in conjunction with resistor R_1 form a phase-shift circuit. Hence, a change in plate current of V_1 will cause the voltage applied to the grid of V_2 to change its phase relationship with the line voltage. In the plate circuit of V_2 is connected the coil of a Western Electric series 275-276 mercury relay. This relay has a spdt contact arrangement that vibrates in synchronism with the grid voltage of V_2. The phase relation of the relay armature with the line is determined by the plate current of V_1. In operation, contact K_{1A} of the relay remains connected to contact K_{1B} for 180 degrees of the a-c excitation and then rapidly transfer to contact K_{1C} for remaining 180 degrees of cycle.

The servomotor circuit consists of transformer T_4, choke L_2, motor-armature M, current-limiting resistors R_2 and R_3 and spark-suppressing capacitors C_2 and C_3. In operation, the relay becomes a full-wave rectifier and d-c flows through the motor armature. The direction and magnitude of current is determined by the phase relation between relay contact operation and voltage of the transformer T_4 secondary. When the relay and winding T_{4A} are in phase, contact K_{1A} of the relay transfers from one side of T_4 to the other at the zero-voltage points of the a-c voltage cycle. Full-wave rectification takes place, a maximum voltage appears across the motor armature and it rotates in a positive direction. A change in phase of 180 degrees in the relay operation causes the armature to rotate at a maximum velocity in a negative direction. When the servosystem is balanced, the phase relation between the relay and T_4 is 90 degrees, and the average current through the motor armature is zero. It has been found that

stabilization of the servo can be obtained by adding to the input signal e_i a derivative $-de_o/dt$ of the balancing voltage e_o and a degenerative integral $-\int e_a\,dt$ of the motor armature voltage e_a. The magnitude of $-de_o/dt$ is controlled by adjustment of capacitor C_1 for optimum performance and is then fixed. The magnitude of $-\int e_a dt$ is controlled by potentiometer R_a, which can be adjusted for optimum servo performance at different loading conditions.

Performance

A typical shape reproduction is shown in Fig. 5. The maximum deviation is 0.04 inch, which is a recording reproduction accuracy of 0.66 percent when expressed in terms of the maximum turntable radius. This initial precision was obtained without directing appreciable effort toward making the system a precision device.

This shape represents about the maximum pressure angle that could be followed with the straight-line follower mechanism employed. To follow the pressure angle that approaches 70 degrees on this shape, a very smoothly operating follower guided by ball bearings and exerting a minimum pressure against the pattern was required.

Tests conducted with the apparatus indicated that variations in playback velocity of ± 30 percent produced no perceptible change in the reproduced accuracy of the intelligence. The reproduction was also unaffected by reduction in tape flux which occurred during the first few playbacks.

Life tests conducted with Brush tape indicated that 1,000 playbacks could be obtained before erratic reproduction of the record began to occur. This erratic reproduction results from the wearing off of the 0.0005-in. coating of magnetite on the paper base. When it occurs, the quantity of magnetic material is reduced to such a point that the reproduced signal has insufficient strength to trigger the flip-flop circuit consistently.

Design Data

For many applications in which a short memory of only one or two cycles is required, paper tape can be used. If a record were called upon for more than a thousand reproductions, it would be necessary to use a metal tape.

The choice of multivibrator frequency is influenced by several factors. The frequency response of the system determined what the maximum square-wave frequency could be while still maintaining a good square-wave flux characteristic in the tape. A high-frequency square wave is desirable from the viewpoint of filtering the flip-flop output. The time constant for an averaging filter to smooth out lower-frequency waves would impose greater phase lags in the system's response.

On the other hand, a low-frequency square wave is also desirable. It will increase the precision of the system, particularly if the flip-flop circuit were to behave so that it triggered at different grid-voltage magnitudes during different cycles because of possible circuit instabilities.

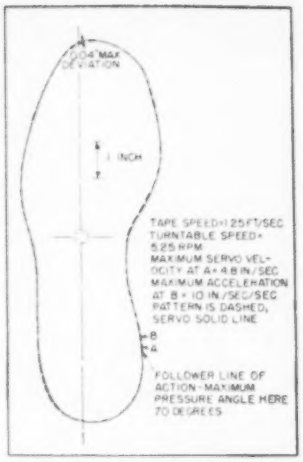

FIG. 5—Shoe-shape reproduction from magnetic-tape recording



FIG. 6—Ideal peaks from reproducing head (A) and actual peaks (B) showing how noise can affect signal (slopes are exaggerated)

Optimum Frequency

With an ideal square-peaked flux wave, an immediate reversal of flux occurs in the tape and the voltage output of the recording head consists of spikes. Since the slope of the spikes would be infinite, variations in magnitude of the flip-flop grid voltage would cause no variations in the time at which the flip-flop triggers. This ideal is shown in Fig. 6A. Changes in grid voltage from a to b or a_1 to b_1 will not affect ratio t_1/T.

However, the reproduced peaks are as shown in Fig. 6B. This deterioration results from the frequency-response limitations of the reproducing head and the fringing and demagnetization effects that occur when the tape flux changes polarity. Let it be assumed that the flip-flop circuit does not always trigger at a uniform level of grid voltage but that it might trigger at grid voltages varying between the extremes ab or a_1b_1. Then maximum $\Delta t_1 = t_{1\,MAX} - t_{1\,MIN}$ and, due to the slope of peaks A and B (Fig. 3) the intelligence can have a maximum variation,

$$\Delta I_{MAX} = \frac{K\,(t_{1\,MAX} - t_{1\,MIN})}{T}.$$

It is, therefore, desirable that the peak wavefronts have a slope approaching infinity to minimize Δt_1. Since $\Delta I = K\,\Delta t_1/T$ and $f = 1/T$, then f should be kept low yet high enough to transmit readily the highest frequency of the intelligence.

REFERENCES

(1) H. B. Shaper, Frequency-Modulated Magnetic-Tape Transient Recorder, *Proc. IRE*, p. 753, Nov. 1948.

(2) L. G. Killian, Data Recording on Magnetic Tape, *Electronic Industries*, 4, p 3, Apr. 1948.

(3) L. C. Holmes and D. L. Clark, Supersonic Bias for Magnetic Recording, ELECTRONICS, p 156, July 1945.

Quench Controller for Steel

Improved control of quench time in cooling heat-treated steel parts is obtained by taking advantage of the fact that hot steel is not ferromagnetic. The cooled part becomes magnetic and changes flux linkage between inductors so that an amplified signal actuates alarms

By WALTER K. HALSTEAD and L. D. JAFFE

W. S. Macdonald Co., Inc.
Cambridge, Mass.

Watertown Arsenal
Watertown, Mass.

AT HIGH TEMPERATURES (above 750 C), steel assumes a crystallographic structure known as austenite, which is not ferromagnetic. On cooling, the austenite tends to change to other structures which have undesirable mechanical properties. Formation of these undesirable structures takes time, however, and may be prevented by cooling the part very rapidly.

Quenching in cold water provides the most rapid as well as the most economical method of cooling. If the cooling is fast enough, the austenite will remain until the steel reaches a temperature known as M_s (martensite-start), which depends upon the composition and is usually between 100 and 400 C. On further cooling, the austenite progressively transforms to a structure known as martensite, which is desirable from the standpoint of mechanical properties and happens also to be ferromagnetic.

If rapid cooling is continued below the M_s temperature, through the range where martensite forms, the stresses set up by its formation are likely to crack the part, making it worthless. Thus, the part should be removed from the quench tank when it reaches the M_s temperature.

Actually, the steel at the surface of the part cools more rapidly than the steel in the interior, and may include a considerable percentage of martensite while the interior is still completely austenitic. Usually the metallurgist would like to stop the quench at such a point that the piece, on removal to the air, will equalize out at about the M_s temperature.

Up to the present, the best available instrument for controlling the quench has been a clock but this method has three drawbacks:

The M_s temperature desired varies significantly from lot to lot of steel. To determine it experimentally requires additional equipment, expense and delay.

Even when the M_s temperature is known, the time of quench necessary to reach it depends upon the size and shape of the steel part. To fix this time either additional experimental work or hit-and-miss trying is necessary.

The quenching time to reach a fixed temperature does not stay constant but changes significantly because of fluctuations in such factors as the temperature of the part when quenching starts, the amount and character of oxide scale on the surface of the steel prior to quenching and the temperature, agitation and impurity content of

Instrument at left rings bell and lights lamp when heat-treated steel part has been quenched sufficiently in cold water

the quenching water that is used.

It was thought that these difficulties could be overcome by obtaining a signal from the part itself at the time that martensite formation began. To do this, advantage could be taken of the magnetic nature of martensite. As mentioned, it is generally desirable to interrupt the quench when the part would equalize near or at the M_s temperature, the surface portions being below M_s at the instant the quench is stopped and the innermost portions being above M_s. Accordingly, the signal is desired not at the instant that the first trace of magnetic material appears at the surface of the part, but rather after martensite formation has occurred to a depth predetermined by the metallurgist.

Design

The following requirements were considered in the design of the controller:

It must accommodate a wide range of sizes and shapes and indicate the amount of martensite formation to a good degree of accuracy. The measurement must be independent of the position of the part within the quench tank and not be affected by temperature or agitation of the quenching medium. The controller must be sufficiently free of drift to require only occasional recalibration, it must indicate the control point with a visual and audible alarm, and it must not interfere with normal practice.

The heart of the controller is a system of coils, essentially a loosely-coupled air-core transformer which is placed in the quench tank. Introduction of ferromagnetic material in the transformer field changes the flux linkages between the driver, or primary coil, and the pickup or secondary coils, resulting in a net useful signal. The choice of coil configuration is determined largely by the available space and the sensitivity and stability requirements. In any case, the controller as a whole should be designed to balance out any nonvarying signal from the inherent coupling between the coils as an air-core transformer, from the surrounding magnetic coupling paths and from the eddy currents of nearby conducting masses and of the sample itself.

Magnetic flux in the coil system is directly proportional to the exciting current and hence in phase with it, while induced voltages are proportional to the rate of change of flux and therefore lag 90 degrees behind a sinusoidal exciting current. Since eddy currents themselves are already the product of electromagnetic induction, the induced voltage caused in the pickup coil by eddy currents in adjacent metallic objects lags an additional 90 degrees behind the directly induced voltage between the driver and pickup coils. It is therefore possible to balance out the eddy-current pickup separately from the directly-induced voltage. This balancing can be done either in the coil system, or by injecting properly phased voltages into the controller amplifier.

Coil Circuit

The design of the coil system is shown in Fig. 1. The centrally located driver coil excites two identical pickup coils equidistant from the driver. The pickup coils are connected in series opposition so that the voltages induced in them cancel as long as the magnetic coupling in the two halves of the system are equal. This system was chosen because, for the high balance ratios required, greater stability is obtained from a geometrically balanced system.



FIG. 1—System of coils installed in quench tank

When a ferromagnetic piece is introduced in the upper region, the coupling between the driver and upper pickup is increased, raising the induced voltage in the upper coil and resulting in a net signal at the output terminals. For a piece of given overall dimensions, the unbalance signal is a direct function of the thickness of the magnetic cross section.

Only one-half of the coil system can be used as a work space, since a sample in the other half would cause a signal of opposite phase; a sample straddling the driver coil yields no net signal at all.

Exact balance between the two pickup coils could be obtained in three ways: mechanically, by slight adjustments in the position of one of the coils; magnetically, by introducing a small piece of steel in the half with the lower coupling; and electrically, by winding one of the coils with a few more turns than the other, bringing out a tap from a previous turn so that the tapped section straddles the balance point and connecting a potentiometer across this section of the coil. The electrical method of balance was chosen to permit location of all adjustments and controls on the front panel of the controller.

With reasonable care in the original construction of the coil system, the tapped section needs to cover only a few percent of the total turns of its coil. In the in-

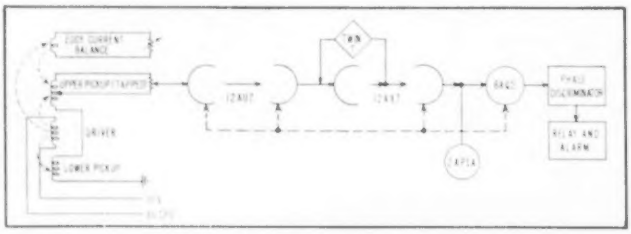

FIG. 2—Block diagram of the complete system

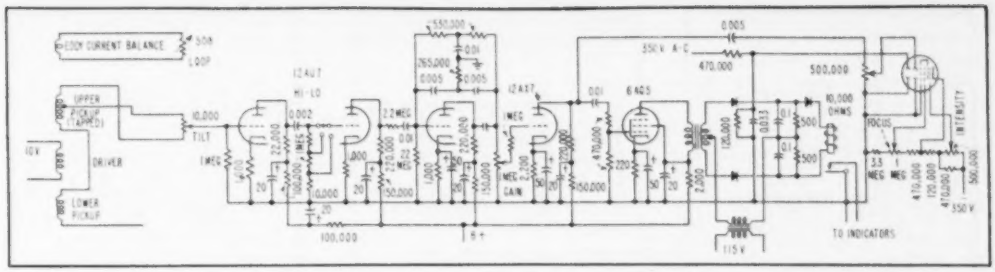

FIG. 3—Circuit of coil arrangement and electronic portion of the quench controller. The lower pickup coil returns to B—

strument, however, this same adjustment is used to establish the control point (see below). Therefore the tapped section of the upper coil covers about 20 percent of the turns. A ten-turn wire-wound potentiometer is connected across this section to permit adequate sensitivity of adjustment.

The above balance is good only for those signals which are derived from direct coupling between the driver and pickup coils; eddy-current balance must be obtained separately. These signals lag 90 degrees behind the direct-coupled signals. To balance them out, a few turns are wound on top of the upper pickup coil and connected to a rheostat in the controller. This eddy-current balance coil induces an adjustable signal of proper phase in the upper pickup coil.

The coil size and separation shown in Fig. 1 may seem unduly large when it is noted that the parts to be quenched do not exceed two inches in diameter by eight inches long. The size allows the part to be moved about in the tank during quenching in accordance with good heat-treating practice.

A block diagram of the controller is shown in Fig. 2. Sixty-cycle power was chosen for coil excitation. Four stages of voltage amplification and one output power stage are used.

The amplifier circuit is shown in Fig. 3. The heater of the first twin triode is operated from d-c to avoid the appearance of spurious sixty-cycle signals at the input.

A three-position attenuator switch after the first stage, with ratios of 100:10:1, allows for coarse adjustment of the quench controller to the size of sample to be quenched. A continuously variable gain control after the third stage gives fine adjustment between attenuator steps. The third stage is tuned to the fundamental frequency of the system by means of a twin-T feedback network.

The available amplification in this system may seem unduly large, but is necessary because of the combination of rather small samples (2 x ¾-inch diameter with a 10 to 20-percent magnetic cross section) with a rather large coil system (17½-inch I.D.). It was considered better to provide the extra gain than to use separate coil systems for samples of widely differing size.

From the final stage, the signal goes into a phase discriminator whose output operates a sensitive d-c relay. This relay responds only to in-phase signals caused by increased magnetic coupling in the upper half of the coil system.

The relay contact closes a six-volt circuit on a red signal light and an alarm bell. A jack for the connection of remote alarm equipment is also provided.

Monitor

A built-in two-inch cathode-ray oscilloscope serves as a balance indicator and signal monitor. The signal from the fourth amplifier stage is applied to the vertical deflection plates. The horizontal plates are driven by a sixty-cycle voltage of fixed amplitude and phase, adjusted so that it is in phase with a signal from the coils caused by magnetic unbalance alone.

The pattern on the crt is a horizontal line when direct as well as eddy-current pickup is in balance in the coil system. A pickup unbalance due to magnetic differences in the halves of the coil system causes the pattern to tilt. This can be corrected by adjusting the potentiometer across the tapped coil section (TILT control). An eddy-current unbalance causes the pattern to open up into a loop. This is corrected by adjustment of the current in the eddy-current balance coil (LOOP control).

Operation

In operation, after initial balance has been established, the gain control must be set. The most practical procedure for determining the gain setting appears to be as follows: prior to heat treating place the steel part, which is then ferromagnetic, in the work area. Adjust the gain until the alarm just operates, and read the gain setting. Increase the gain by a predetermined factor, which depends upon the amount of martensite desired in the part when the quench is to be stopped.

When, during heat treatment, the hot part is placed in the quench tank, an increased out-of-phase component immediately appears in the pickup coil because of eddy-currents in the part. An in-phase component does not appear until the surface of the part cools to the M_s temperature. As cooling continues and the amount of magnetic martensite in the part grows, the in-phase component increases until, at the preset amount, it trips the alarm.

The quench controller was developed for use in the metallurgical laboratory. Its reproducibility of operation has been established and it has proved amply sensitive and stable to indicate, for example, whether there is 10 or 20-percent martensite in steel parts of widely varying size.



FIG. 1—Quadratic electro-optic effect employs perpendicular field



FIG. 2—Linear electro-optic effect is exhibited by many crystals



FIG. 3—Linear magneto-optic effect creates rotary polarization

Electrical Color Filters

Varying electric and magnetic fields are used to control color of transmitted light. Principle of double refraction is applied. Tests of system indicate possible color television applications

ELECTRICALLY AND MAGNETICALLY controlled color filters show promise for application in production of colored motion pictures on black and white film, in color facsimile transmission systems and, possibly, in color television.

Electrical color filters depend upon the fact that certain materials exhibit the property of birefringence, or double refraction, when electrically or magnetically stressed[1]. When polarized light is transmitted through such a birefringent material, a color-controlling phase shift may be introduced. Tuning, or changing colors, may be accomplished mechanically[2] by rotating the axis of a variable phase shifter, electrically or magnetically.

Early electrical color filters using crystals of zinc sulfide were unsuccessful since the crystals were small, colored and cloudy[3,4]. Crystals of ammonium dihydrogen phosphate or ammonium dihydrogen arsenate, $NH_4H_2PO_4$ or $NH_4H_2AsO_4$, have been grown and processed for optical purposes[4,5] furnishing more useful materials. Recently a patent has been granted[7] relating to color filters of this nature.

The phenomena which can be utilized in conjunction with polarized light in the electric or magnetic control of color are: the linear electro-optic, or Pockels effect; the quadratic electro-optic, or Kerr effect; the linear magneto-optic, or Faraday effect; the quadratic magneto-optic, or Cotton-Mouton effect; and the effect of a magnetized mirror on the plane of polarization of an incident beam of light. This latter effect is called the magneto-optic Kerr effect.

The authors have verified experimentally the feasibility of using each of these phenomena, with the exception of the magneto-optic Kerr effect, for the electric or magnetic control of color.

Quadratic Electric Effect

Of the electro-optic effects the most completely investigated is the quadratic or Kerr effect shown in Fig. 1. This effect is exhibited by many substances, notably nitrobenzene, which become birefringent when electrostatically stressed, their birefringence being a function of the electric field intensity. If a linearly-polarized light ray passes through such an electrically-stressed substance, it is split into two component rays, known as the ordinary and extraordinary rays. These rays are polarized at right angles to each other, and a phase difference introduced between them. The magnitude of the phase difference can be adjusted by control-



FIG. 4—Quadratic magneto-optic effect also uses perpendicular field

By VICTOR A. BABITS

and

H. FRANK HICKS, JR.

Department of Electrical Engineering
Rensselaer Polytechnic Institute
Troy, N. Y.

ling the electric field.

On emergence, the light which was plane polarized when entering the substance will, in general, have become elliptically polarized. For certain values of electric field intensity the emergent light will be circularly polarized, and for certain values plane polarized. In the quadratic electro-optic effect, the electric field is perpendicularly applied to the light path. The angular phase difference introduced between a component of light polarized in the plane of the electric field and a component polarized normal to the plane of the electric field is

$$\delta = 2\pi JaE^2$$

where δ = angular phase difference; J = the Kerr constant, which in general is a function of the wavelength of light; a = length of light path in substance and E = electric field intensity.

The Kerr constant J is tabulated for many substances in such references as the "International Critical Tables".

Linear Electric Effect

The linear electro-optic effect shown in Fig. 2 is exhibited by many crystals. As in the quadratic electro-optic effect, an angular phase delay is introduced between the two mutually perpendicularly-polarized components of linearly-polarized light as the light passes through the electrically-stressed substance. In the linear electro-optic effect, the electric field is applied parallel to the light path, and the axes of resolution for the two components of light are determined by the crystal structure. The angular phase difference introduced between two perpendicularly polarized components is

$$\delta = 2\pi PaE = 2\pi PV$$

where: δ = angular phase difference; P = linear electro-optic constant which, in general, is a function of the wavelength of light; a = length of light path in substance and V = voltage applied to substance.

Values of the linear electro-optic constant are not readily available, but have been investigated[2].

If the incident light is linearly polarized, the emergent light will, in general, be elliptically polarized, except for phase differences which are odd multiples of 90 degrees or integral multiples of 180 degrees, when it will be circularly and linearly polarized, respectively.

Linear Magnetic Effect

The linear magneto-optic effect shown in Fig. 3 is exhibited by many substances in all states, and is evidenced predominantly by a rotation of the plane of polarization through the angle β, and by birefringence when light passes through a substance parallel to a magnetic field. This birefringence and rotation of the plane of polarization, or rotary polarization as it is sometimes called, may be explained by assuming the plane polarized light is, when entering the magnetically stressed substance, split into two oppositely circularly-polarized components which travel with unequal velocities in the substance. Since the substance becomes an optically active medium under the influence of the magnetic field the absorption coefficients of the substance for the ordinary and the extraordinary ray are different. This different absorption of the plus and minus circularly-polarized components is called circular dichroism.

Owing to the angular phase shift introduced between the two oppositely circularly-polarized components, and to circular dichroism, the light emerging from the magnetically-stressed substance is elliptically polarized, and its plane of polarization has been rotated through the angle β.

The angular rotation of the plane of polarization of linearly-polarized light passing through a substance displaying the linear electro-optic effect is

$$\beta = RaH \cos\gamma$$

where:
β = angular rotation of the plane of polarization of light; R = magneto-optic, or Verdet's constant, which is a function of the wavelength of light; H = magnetic field intensity; a = length of light path in substance and γ = angle between optical path in substance and magnetic lines of force. Values of the magneto-optic constant R are readily available in many references.

Quadratic Magnetic Effect

The quadratic magneto-optic effect shown in Fig. 4 has received the least attention of any of the usable optical effects enumerated. As in the quadratic electro-optic effect, the field is perpendicular to the optical path. Experimentally this effect appears to be very promising because of the ease with which the required field may be produced for some substances.

As we know, birefringence and rotary polarization are exhibited by many substances in the absence of externally applied electric or magnetic fields. These materials, along with the phenomena already enumerated, permit the development of devices which can introduce either fixed or variable amounts of phase difference, or rotate the plane of polarization of light by fixed or variable amounts according to the magnitude of the

electric or magnetic field, the mechanical tension, the thickness of the substance or the concentration of a solution.

Theory of Color Filters

A simple optical system called a polariscope is shown in Fig. 5. The polarizer and analyzer may be Nicol prisms, or sheets of Polaroid. The polarizer and analyzer transmit light vibrating in a given sense only. Light vibrating in other senses is either totally reflected as in the Nicol prism, or absorbed as in Polaroid. If light incident upon the polarizer is completely unpolarized, the maximum transmission through the polarizer approaches 50 percent, although surface reflections and internal absorptions reduce this figure to some extent.

Standard derivations yield equations for the intensity of light emerging from the polariscope.

$$I'' = \frac{I_o}{2}\cos^2 \delta/2$$

$$I' = \frac{I_o}{2}\sin^2 \delta/2$$

where I'' = the intensity of the emergent light when polarizer and analyzer are parallel; I' = the intensity of the emergent light when polarizer and analyzer are perpendicular (crossed); I_o = intensity of unpolarized, incident light and δ = the angular phase difference introduced by the phase device. It should be noted that for both these equations the principal axis of vibration of the phase device is at 45 deg to the plane of polarization of the polarizer.

The angular phase difference δ can be either fixed or variable. If a fixed phase difference is introduced, δ_f is

$$\delta_f = \frac{2\pi ca}{\lambda}$$

where δ_f = fixed phase difference introduced; c = proportionality factor which, in general, is a function of wavelength; a = length of light path in device and λ = wavelength of light.

If a variable-phase device is used, the phase difference introduced is

$$\delta_v = \frac{2\pi bf(Z)}{\lambda}$$

where δ_v = variable phase difference introduced; b = constant of proportionality which, in general, is a function of the wavelength of light, and the length of the optical path and $f(Z)$ = some function of the field intensity.

Substituting the expression for δ_v in the equation for I'':

$$I'' = \frac{I_o}{2}\cos^2 \frac{\pi ca}{\lambda}$$

Thus I'' is a maximum at those wavelengths where ca is equal to some integral multiple of π. Assuming, for instance, that ca is chosen to be equal to $4\lambda_o$, where λ_o is the wavelength of the color which it is desired to transmit, the expression for I'' becomes

$$I'' = \frac{I_o}{2}\cos^2 \frac{4\pi\lambda_o}{\lambda}$$

A transmission maximum will occur at λ_o, and adjacent transmission minima will occur at $8/7\lambda_o$ and $8/9\lambda_o$, (neglecting dispersion). A four-wavelength phase device was chosen as an example because, if the wavelength of maximum transmission is chosen as 535 mμ, then the three wavelengths of interest will be identical to the wavelengths of light referred to as Primaries A, as recommended by the Subcommittee on Color, Panel Six of the Radio Technical Planning Board.

As a simple example for the magnetic control of color, assume the fixed-phase device to be a four-wavelength plate for the green primary. With polarizer and analyzer parallel, the transmitted light will be green. By inserting a variable, magnetically-controlled phase device between analyzer and polarizer, in addition to the fixed-phase device, and adjusting it so the angle of rotation of the polarization plane of the transmitted light is 90 deg, the light emerging from the whole system will be the complement of the green primary. The rotation through 90 deg achieved by the magnetic device has the effect of changing the transmission characteristic from a $\cos^2$ to a $\sin^2$ curve. The 90 deg rotation in space could also be obtained by a variable

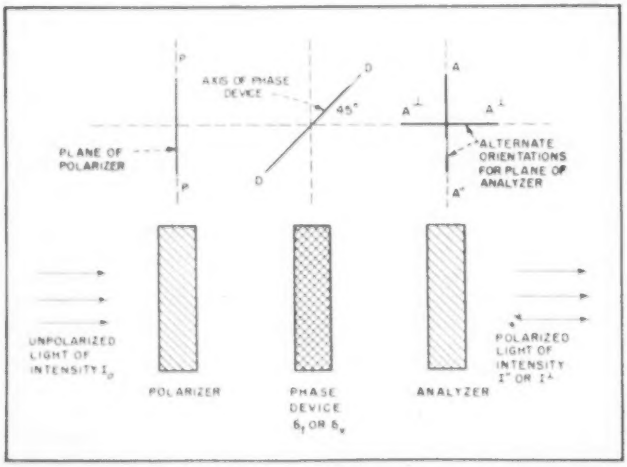

FIG. 5—Simple polariscope may be used with either fixed or variable phase device



FIG. 6—Two-stage electrically-controlled color filter transmits green, red or blue light

electric-phase device adjusted to one-half wavelength.

As a second example, consider the possibility of passing white light through more than one polariscope. The intensity of the emergent light will be the product of the transmission characteristics for each individual polariscope.

A two-stage electrically-controlled filter, which has been built and operated, is indicated in Fig. 6. The first stage consists of a fixed-phase device in which ca is made equal to $8\lambda_o$. The value of λ_o is chosen to be 535 mμ, the green primary. The eight-wavelength plate is inserted between polarizer P_1 and analyzer P_2. The transmission characteristic for the first stage is shown in Fig. 7A. With the eight-wavelength phase device, the maxima adjacent to λ_o occur at $8/9\lambda_o$ and $8/7\lambda_o$. Thus three maxima in the visible portion of the spectrum define the three primaries of interest. The second stage consists of a fixed-phase device, in which ca is made equal to $2\lambda_o$, and a variable-phase device VPD, both inserted between polarizer P_2 and analyzer P_3. The variable-phase device used in the actual filter is a 2 in. × 2 in. crystal of ammonium dihydrogen phosphate. With no voltage applied, the transmission characteristic of the second stage is due to the two-wavelength plate only. The maximum of this second stage occurs at the green primary and green is transmitted. The transmission characteristic for the filter set to transmit green is illustrated in Fig. 7 B.

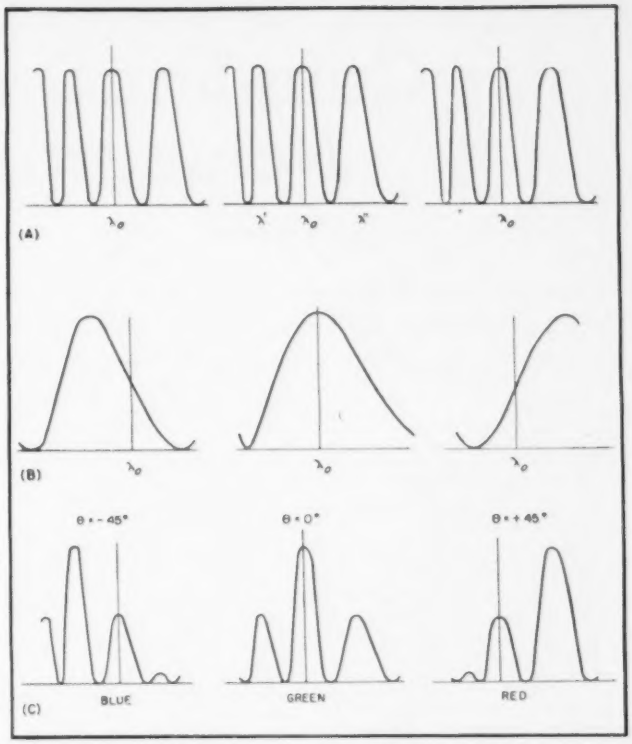

FIG. 7—Transmission characteristic of first stage (A) shows green primary and adjacent red and green maxima. With no voltage applied (B) only green passes second stage. Sequence of —4,500v, 0 v and +4,500v (C) yields blue, green and red

Electric Control

If voltage is applied to the variable-phase device in one direction, the phase difference introduced will add to that due to the fixed-phase device, shifting the peak of the transmission curve to coincide with the red primary λ''. The required phase shift is obtained by applying approximately 4,500 volts to the crystal. If the voltage is now applied in the opposite direction, the phase difference subtracts from that introduced by the fixed phase device and the peak is shifted to coincide with the blue primary λ'. These transmission characteristics are illustrated in Fig. 7 C.

For a color sequence of red, green and blue the voltages to be successively applied to the crystal are: plus 4,500 volts, zero volts, minus 4,500 volts. Since these voltages are of equal magnitudes and are applied for equal times, the average voltage is zero. Direct voltage can be applied to the crystal for no longer than one second without damaging the unit. This method of color control results in a feasible, electrically controlled color filter.

The system yields colors approximately 50 percent pure when an equienergy source is used. Other systems using two crystals, and based on the principles of the examples described above, yield colors which approach purities of 90 to 95 percent. The required waveforms in this system permit the use of standard electronic switching techniques.

Crystals in the system described may be replaced by any of the electrically or magnetically-controlled variable-phase devices enumerated earlier.

The total thickness of the two-stage filter may be reduced to somewhat less than one inch. Although the field angle through the crystal is limited to 6 to 8 degrees, the optical system can be designed so as to circumvent this limitation.

References

(1) T. de Nemes, Color Television with Electrical Color Filters, *Television & Shortwave World*, Feb. 1939.

(2) G. Otterbein, Ein Farbenlichtrelais, *Telegr. Fernspr. u. Funktechn.*, **27**, p 550, Nov. 1938.

(3) M. v. Ardenne, Ein neues Grossfarbenlichtrelais f. Intensitats-Farb—oder Polarisationsebenen-Steuerung, *Telegr. Fernspr. u. Funktechn.*, **28**, No. 6, p 226, 1939.

(4) B. H. Billings, A Tunable Narrow-Band Optical Filter, *Journ. of Optical Soc. of America*, **37**, No. 10, p 738, 1947.

(5) G. Busch, Neue-Seignette-Elektrika, *Helv. Phys. Acta*, **2**, p 269 and 272, 1938.

(6) B. Zwicker and P. Scherrer, Elektrooptische Eigenschaften der Seignette elektrischen Kristalle KH_2PO_4 u. KD_2PO_4, *Helv. Phys. Acta*, **17**, p 346, 1944.

(7) E. H. Land, Variable Polarizing Color Filters, U. S. Patent 2,493,200.

(8) F. de kolicsanyi, "Beobachtungen u. Messungen an elektrisch doppelbrechenden festen Körpern," Dissertation Erlangen, 1925.

(9) Ch. Schramm, Uber den elektrooptischen Effekt an Zinkblende, *Annalen d. Physik (5. Folge)*, **25**, p 309, 1936.

Gain-Bandwidth Nomograph

Equations involved in design of single-tuned amplifier circuits are incorporated in one large nomograph to speed up design calculations. Shows overall effect of varying the parameters when seeking the most economical tube arrangement for desired gain and bandwidth

By CHESTER W. YOUNG

Electronic Engineering Designer
Electronics and Guidance Section
Consolidated Vultee Aircraft Corp
San Diego, Calif.

THE design of vacuum-tube amplifiers involves determining the maximum gain and/or bandwidth using the most economical tube arrangement. The most practical first-approximation calculation for single-tuned circuits such as cascaded synchronously tuned i-f stages was found to be $G_m/2\pi C_t$, and the nomograph on the following page was therefore based on this ratio. The nomograph encompasses all of the interdependent equations used in amplifier design, hence shows the effect of variations in each parameter on the others.

Practical values of G_m and C_t that include the effect of the coupling networks can be found by taking approximately 85 percent of the maximum G_m and 160 percent of the value of C_t given in tube manufacturer's data. This makes the usable gain-bandwidth about 53 percent of the ideal, or roughly one-half. This relationship is found in Table I.

The nomograph solves the following equations:

$$Q = f_r/B \quad (1)$$

$$A = G_m \times R_L \quad (2)$$

$$AB = A \times B \quad (3)$$

$$AB = G_m/2\pi C_t \quad (4)$$

$$B = 1/2\pi C_t R_L \quad (5)$$

$$A_{max} = 1/2\pi f C_{gp} R_L \quad (6)$$

where Q = $R \omega C$ = circuit quality, f_r = circuit resonant frequency, B = 3-db bandwidth, A = stage gain, G_m = tube transconductance, R_L = total damping resistance, C_t = total shunt capacitance, A_{max} = maximum usable gain, and C_{gp} = total effective grid-plate capacitance.

Since the bandwidth between two 3-db frequencies of a tuned circuit is equal to the 3-db frequency of a parallel or series R-C circuit, the nomograph can be used also for video types of circuits. Also, as Eq. 5 states that bandwidth is independent of L, the nomograph ignores L. Use of this nomograph is best illustrated by an example.

Table I—Examples of Ideal and Practical Tube Capacitances

IDEAL

Tube Type	C_g $\mu\mu f$	C_p $\mu\mu f$	C_t $\mu\mu f$	G_m/C_t mc
6AC7	11.0	5.0	16.0	562
6AK5	4.0	2.8	6.8	750

PRACTICAL

Tube Type	C_{in} $\mu\mu f$	C_{out} $\mu\mu f$	C_t $\mu\mu f$	G_m/C_t mc
6AC7	17.0	8.0	25.0	312
6AK5	6.7	4.4	11.1	378

If the known values are f_r = 30 mc, B = 1 mc, C_t = 16 $\mu\mu f$, G_m = 5,000, and C_{gp} = 0.0082 $\mu\mu f$, find the values of Q, AB, A, R_L and A_{max}.

Step 1: Align points f_r = 30 mc and B = 1 mc, and read Q = 30.

Step 2: Align points C_t = 16 $\mu\mu f$ and G_m = 5,000, and read AB = 50 mc.

Step 3. Align AB = 50 mc and B = 1 mc, and read A = 50.

Step 4: Align A = 50 and G_m = 5,000, and read R_L = 10,000.

Step 4 (alternate): Since the loading resistance is directly related to bandwidth and shunt capacitance by means of Eq. 5, it may be found by aligning B = 1 mc and C_t = 16 $\mu\mu f$, giving R_L = 10,000 ohms as before.

Step 5: To ascertain whether A = 50 in Step 3 is a stable value of gain, a criterion of feedback through the tube grid-plate capacitance causing oscillation is determined. If the attenuation from plate to grid is set equal to the amplification from grid to plate as the critical value, then the desired gain must be less than the maximum usable gain. The value A_{max} is approximated by dividing R_L by the reactance of C_{gp} and thinking of this attenuation as a negative gain. This holds true when the input and output impedance are the

(Continued on page 118)

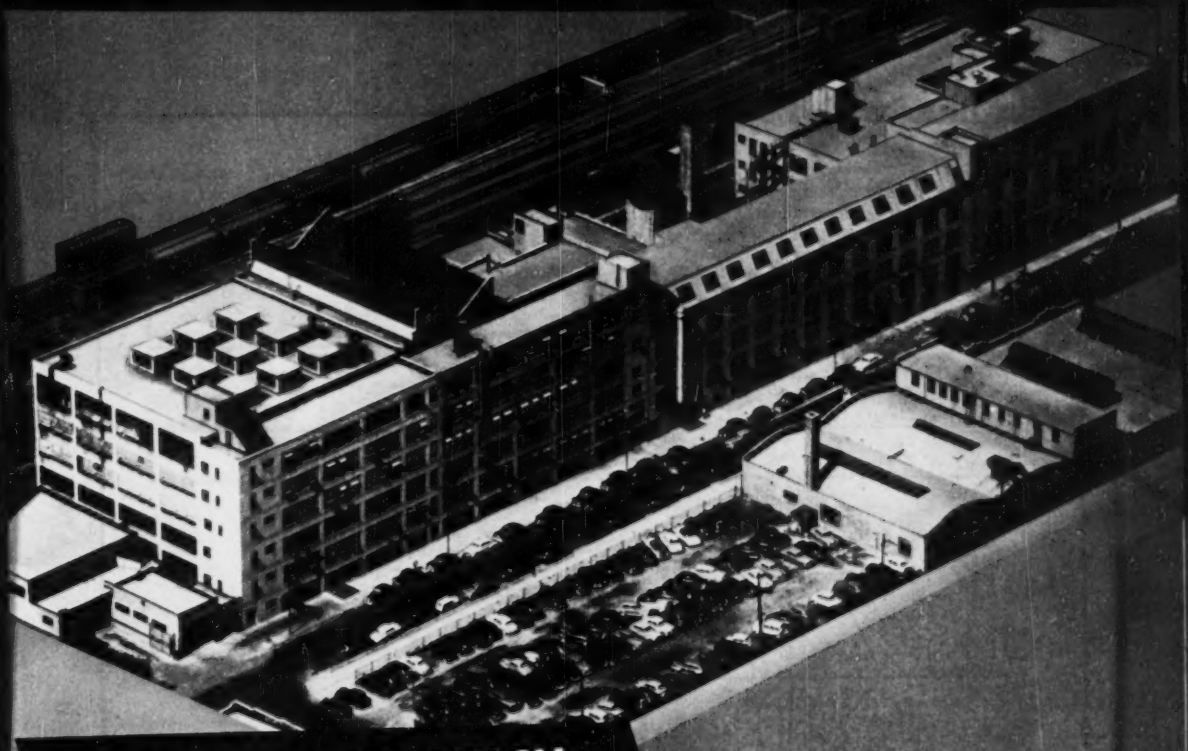

THERE'S SO MUCH MORE PUT INTO EACH Cinch PART, THAT... YOU GET MORE OUT OF IT!

Available at leading electronic jobbers — everywhere

Each Cinch component is testimony to Engineering vision and design . . . to the exactitude demanded in its manufacture and the appropriateness and durableness of its materials.

In commercial and National emergencies CINCH is available and ready.

Cinch
ELECTRONIC COMPONENTS

CINCH MANUFACTURING CORPORATION

1026 South Homan Ave., Chicago 24, Illinois

Subsidiary of United-Carr Fastener Corporation, Cambridge, Mass.

Gain-Bandwidth Nomograph (Continued)

same, as in a multistage synchronous tuned i-f amplifier. The reactance of C_{GP} is determined by aligning $f_o = 30$ mc and $C_{GP} = 0.0082$ $\mu\mu$f and reading $X = 6.5 \times 10^6$ ohms. Now align this value of X and $R_L = 10{,}000$ and read the maximum usable gain as 65 on the A_{max} scale. This value is greater than the desired gain of 50, so the amplifier is deemed to be stable.

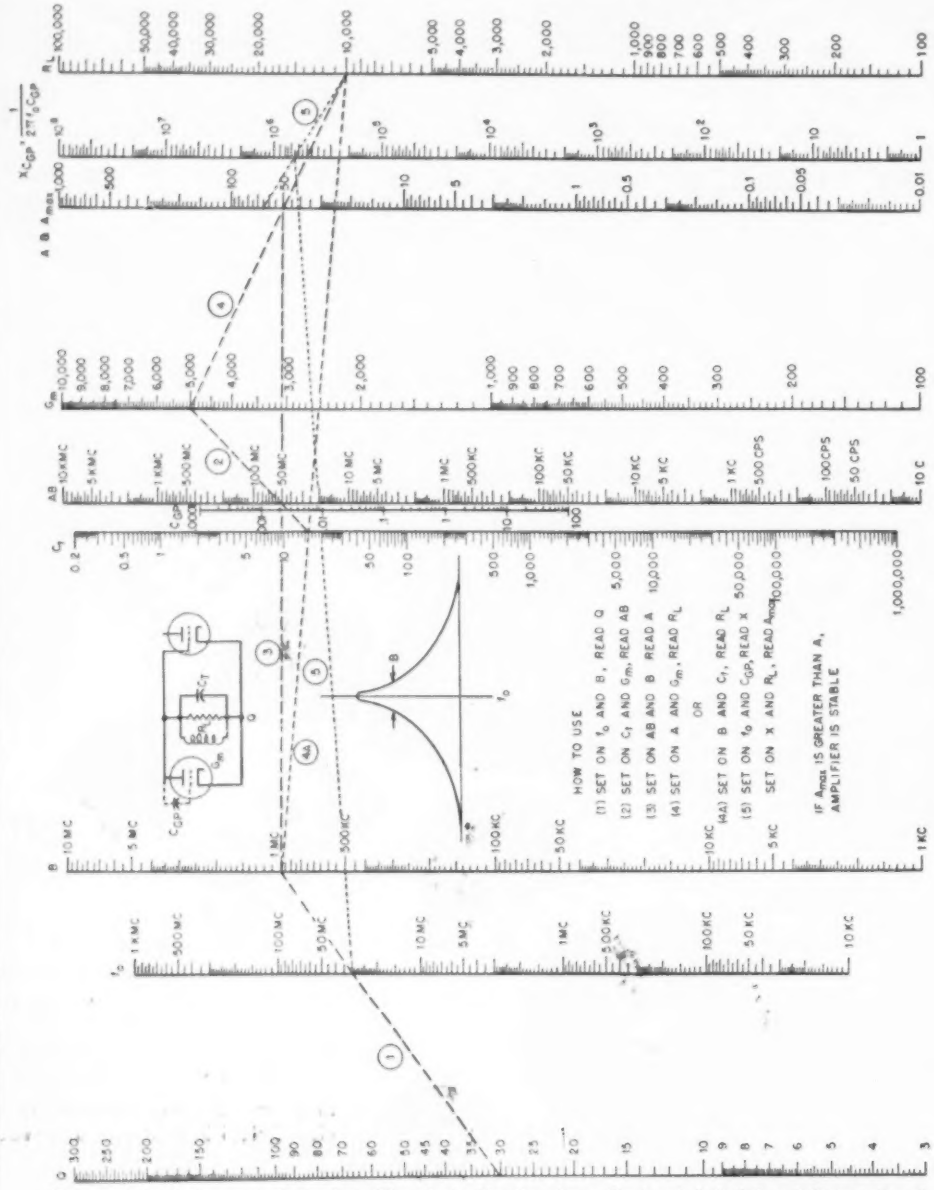
HOW TO USE
(1) SET ON f_o AND B, READ Q
(2) SET ON C_T AND G_m, READ AB
(3) SET ON AB AND B READ A
(4) SET ON A AND G_m, READ R_L
OR
(4A) SET ON B AND C_T, READ R_L
(5) SET ON f_o AND C_{GP}, READ X
SET ON X AND R_L, READ A_{max}
IF A_{max} IS GREATER THAN A, AMPLIFIER IS STABLE

Nomograph for designing single-tuned amplifier circuits like that shown. Numbered dashed lines indicate order of steps in designing an amplifier for desired stage gain and bandwidth and checking its stability

Service Beyond The Sale!

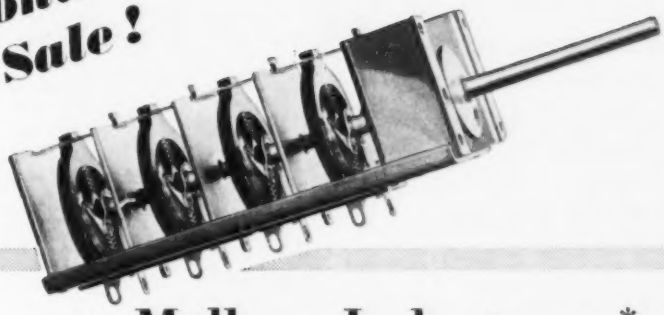

Mallory Inductuner* drives down assembly and service costs!

Less time on the assembly line and less field service have made the Mallory Inductuner standard equipment with important television receiver manufacturers.

A typical front end assembly with the Inductuner requires only two adjustments in each of the four sections . . . one for capacity, one for inductance . . . a total of eight. And, since the Inductuner is continuously variable, allowing finger-tip control by the set owner, unusual latitude is possible in assembly line alignment. On the other hand, the average switch type tuner of four sections requires as many as 48 precision assembly adjustments.

In addition to its assembly line savings, the Inductuner assures a reduction in service problems in the home . . . thus protecting consumer acceptance and good will.

That's service beyond the sale!

Outstanding Advantages of the new Mallory Spiral Inductuner:

1. A single control for easy selection and fine tuning of any television or FM channel **in three, four or six revolutions.**
2. Easily adapted to UHF converter use.
3. Excellent stability eliminates frequency drift.
4. Supplied in three- or four-section designs.
5. Far more quiet operation; permits high signal-to-noise ratio in front end designs.
6. Free from microphonics.
7. Greater selectivity on high frequency channels.
8. Eliminates "bunching" of high band channels.
9. Simplifies front end design and production.
10. Reduces assembly costs.

*Reg. U. S. Pat. Off. Registered Trade Mark of P. R. Mallory & Co., Inc., for inductance tuning devices covered by Mallory-Ware Patents.

Television Tuners, Special Switches, Controls and Resistors

SERVING INDUSTRY WITH

Capacitors	Contacts
Controls	Resistors
Rectifiers	Vibrators
Special Switches	Power Supplies

Resistance Welding Materials

P. R. MALLORY & CO. Inc.

MALLORY

P. R. MALLORY & CO., Inc., INDIANAPOLIS 6, INDIANA

TUBES AT WORK

Including INDUSTRIAL CONTROL

Edited by VIN ZELUFF

Standard Biscuits from Electronic Control 120
Filament Voltage Regulator 120
Television as Research Tool 122
Three-In-One Broadcast 174
Tower Carrier Alarm 182
Audio-Input Limiter for Mobile F-M 184
Disguised Antenna Design 188

Standard Biscuits

VARIATION in biscuit-type baked products caused by human error has been practically eliminated through the electronic coordination of driven equipment at the Farm Crest Bakeries' new cookie plant at Columbus, Ohio.

When a bakery changes from one type of baking product to another, it is usually necessary to change the relative speeds of some of the drives. The speed of the dough-forming and extruding drives must be coordinated with the speed of the 200-foot continuous steel band oven, cooling conveyor, stacker and packing table. The speed of the over-all machine must also be adjusted to provide uniformity.

The change-over is accomplished with a minimum of effort through the use of G-E Coordinated Thy-mo-trol drive. The operator can vary the baking time from 3½ to 14 minutes by operating a push-button station. This controls a motor-operated rheostat in the master panel, which in turn controls over-all bake time and the speed of the various drives in the same proportion. The oven speed range is 4 to 1 and to cover the range of adjustments needed, some of the drives have a 20 to 1 range.

Fig bar production is a good example to demonstrate the coordinating ability of this control. The filled dough jacket is extruded at the entry end of the oven in a number of long, parallel forms and moves continuously through the long oven. After the strips leave the oven, they are cut into bars of correct length by a cutter which is driven by a Thy-mo-trol drive, the speed of which can be adjusted to set the desired length of the fig bar. The cutter automatically adjusts its speed to maintain the same bar length even when the baker changes oven speed.

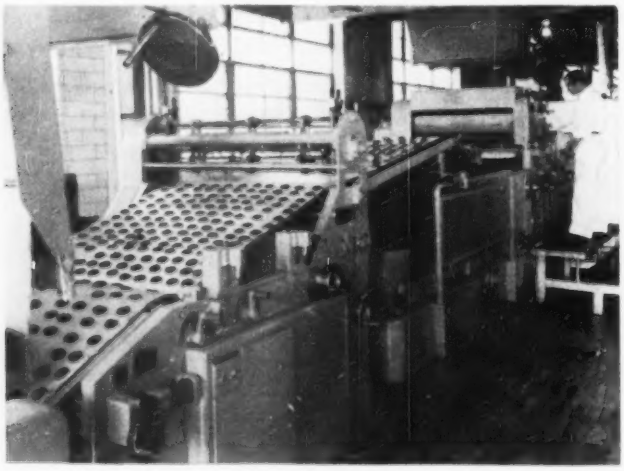

Canvas conveyor belt carries base cake for sandwiches to oven for baking. Coordinated G-E motor drive system permits baker to provide uniformity of baked products

Filament Voltage Regulator

A NOVEL circuit for stabilizing tube heaters is employed in the design of a differential analyzer by R. L. Garwin of the University of Chicago. One section of the analyzer makes use of a d-c feedback amplifier connected as an integrator.

The most difficult problem in the



Circuit for regulating a-c heater of amplifier tube

design was the input behavior of the d-c amplifier, that is, grid current and grid-cathode potential changes. It was felt that the use of standard receiving tube types was an important advantage worth considerable effort to achieve. Grid current was finally reduced to less than 10^{-9} amp without tube selection by using a 6AK5 at 100-μa plate current.

The grid-cathode potential was stabilized by regulating the average heater power to better than 0.1 percent by the scheme illustrated in the accompanying diagram. In this circuit, the filament of the first diode is operated at such current

The finest solder made for all television and radio work . . . Everything Electrical

Kester Solder

Uniform

Efficient

Kester Plastic Rosin-Core and Kester "Resin-Five" Core Solders are recognized by the trade as outstanding for the finest type of radio, television and electrical work.

These two Solders, which are available in the usual single-core type, can now also be had in a 3-core form.

Only highly skilled craftsmen are employed by the Kester Solder Company. Flux formulas and specifications are rigidly adhered to for perfect uniformity.

Making Kester Solder is an exact science from the raw material to the finished product. Everyone knows and prefers Kester because it can be relied upon to do the job right every time, even under the most difficult soldering conditions.

WRITE FOR FREE COPY "SOLDER AND SOLDERING TECHNIQUE"

Be sure to get your free copy of Kester's Technical Manual filled with valuable information regarding the most advanced and efficient industrial solders and fluxes.

EASIER TO USE

MADE FROM VIRGIN METALS

FASTER

ELIMINATES REJECTS

DEPENDABLE

SAVES TIME

KESTER SOLDER

Kester...Standard for the TV and Radio Fields

KESTER SOLDER COMPANY

4204 Wrightwood Avenue, Chicago 39, Illinois

Newark, N. J. • Brantford, Canada

that the emission is temperature-limited. It is then easily shown that the sensitivity of the space current to heater voltage variation gives about two-volt change in plate potential for 0.1 percent heater voltage change. This error signal is then amplified and applied through the power output tube and transformer. By this means, it is made to maintain a constant heater voltage.

Circuits of the stages of the differential analyzer and description appeared in *Review of Scientific Instruments*, p 411, May 1950.

Television as Research Tool

BY FRANK A. FRISWOLD
Electrical Engineer
Lewis Flight Propulsion Laboratory of the National Advisory Committee for Aeronautics
Cleveland, Ohio

AT THIS laboratory, the world's largest laboratory devoted to research on aircraft propulsion, the application of television has proved to be a valuable research facility. In particular, it has proved to be an aid to the proper operation of test facilities, a means of furnishing otherwise unobtainable information and a vital contribution to safety in hazardous test runs.

In modern wind tunnels, Schlieren and interferometer apparatus is extensively employed in the study of shock waves, air flow and attendant phenomena, because these methods permit evaluation of test conditions without the attendant disturbing effects associated with the use of test probes in supersonic air streams. The Schlieren apparatus, through an optical trick, makes air flow phenomena visible in the form of a projected picture and during the test runs these data pictures are recorded by cameras. However, while the test conditions are being set, it is necessary that tunnel operating personnel be provided with a means for viewing the Schlieren image.

At the Lewis Laboratory's eight-by six-foot supersonic wind tunnel the Schlieren equipment is located in a pressure-sealed capsule which encloses the test section and allows the adjustment of the test-section walls to conditions required at any given Mach number.

When the tunnel is in operation the atmospheric pressure within the capsule drops to just a few inches of mercury and the temperature often rises to over 150 F. It is obvious that it is impossible to station a human observer at the Schlieren apparatus to report to the control room. Television has been successfully used to transmit the Schlieren image from the test capsule to the control room, thus allowing the engineers operating the tunnel to set exactly the desired test conditions.



Engineer checks test pattern on portable monitor. Camera, below monitor, is mounted in acoustic shield

In addition to image transmission there is another advantage of television in this application. The size and brilliance of the Schlieren image is a function of the intensity of the light source. An inherent principle of the Schlieren system greatly reduces the amount of light available when a reasonable degree of sensitivity is required.

With a B-H6 primary light source the maximum size of the Schlieren picture that can be comfortably viewed under normal lighting conditions is limited to about 20 square inches. A picture of this size is of limited value, especially when a large number of people are dependent on it for the proper execution of their duties. Television in this instance can be utilized as an optical amplifier producing large brilliant images clearly visible to all.

Recently a ram jet or "flying stovepipe" was tested in the Lewis Laboratory's altitude wind tunnel. It was necessary to observe both the pattern of the shock wave at the front of the jet and the flame emanating from the rear. Two engineers stationed on the test section observation deck viewed the ram jet and reported their ob-

(continued on p 162)

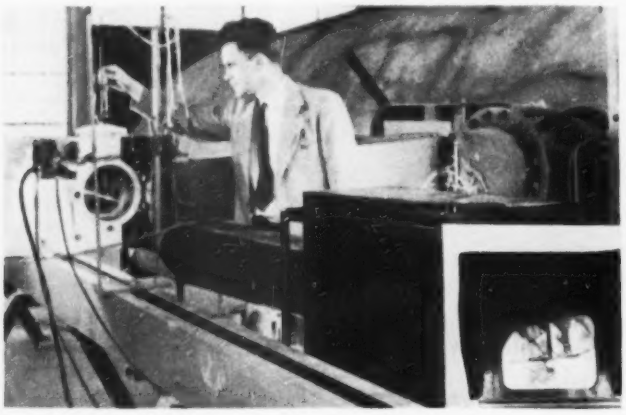

Television camera at Lewis Flight Propulsion Laboratory views the test section of a small supersonic wind tunnel. Insert at lower right shows the received Schlieren image of the test section showing the shock pattern

THE INSIDE STORY:

WHY SPRAGUE MOLDED TUBULARS OUTPERFORM ALL OTHERS!

Molded paper tubulars may look alike from the outside. But there's a whale of a difference inside—the part that really counts in the performance of your products.

The *exclusive* difference in Sprague molded phenolic tubulars is that: *each is made by the same dry-assembly process as large metal-encased oil capacitors.* They cannot be contaminated during manufacture!

Every Sprague molded tubular from 200 to 12,500 volts is molded *dry*. After molding it is impregnated under high vacuum through an opening in the eyelet terminal. A lead is then inserted and the terminal solder sealed. Result? A capacitor that offers you superior heat and moisture protection . . . top insulation resistance . . . high capacitance stability and retrace under wide temperature variations.

Small wonder then why Sprague molded tubulars are preferred for the toughest television and auto radio applications. Take advantage of this superiority by calling in a Sprague representative today. Or, write for Engineering Bulletins 210B and 214.

Hollow eyelet terminal for impregnation after molding
Non-flammable, dense bakelite phenolic-molded housing
CUT-AWAY VIEW
Solder seal as in large metal-encased oil capacitors
Uniform windings of high purity paper and aluminum foil

SPRAGUE®

PIONEERS IN ELECTRIC AND ELECTRONIC DEVELOPMENT

SPRAGUE ELECTRIC COMPANY

North Adams, Massachusetts

THE ELECTRON ART

Edited by JAMES D. FAHNESTOCK

British Linear Accelerator 124
Measuring Moon Radiation at 24,000 Mc 124
Stereo Television at Argonne Laboratories 126
Positive Gate Counter Circuit 194
Graphical Solution for Feedback Amplifiers 204
Bridged-T Neutralization of Pentode Amplifiers 214
Survey of New Techniques 216

British Linear Accelerator

BY LEONARD G. RULE
Formerly attached to British Ministry of Supply

A NEW PARTICLE ACCELERATOR, built on the principle of traveling-wave linear acceleration as opposed to the cyclotron types, is being used for atomic energy research at Harwell, England. With the aid of this machine, of which there are only two earlier models, one in the U.S. and one in England, electrically-charged atomic particles can be accelerated almost to the speed of light.

Acceleration is accomplished by means of a powerful radio transmitter working at a wavelength of 10 cm. A beam of electrons is speeded up on the crest of electrical waves provided by this transmitter, which operates in short bursts of immense power. The electrons are aimed at a heavy metal target, and upon collision, gamma rays are emitted by the metal. In turn, the gamma rays enter a tank of heavy water. Neutrons are then emitted upon breaking up of the deuterium nuclei in the water.



The Traveling-wave Linear Accelerator inside its shelter at Britain's Atomic Energy Research Establishment at Harwell, in Southern England

While the new machine is working at constant speed, its chain of reaction may liberate as many as one billion neutrons per sec. Peak capacity during the 2-μsec pulse is 10^{19} neutrons per second.

Three and one-half million electron volts of energy can be generated by the traveling-wave accelerator. Basic research was carried out by Harwell scientists and the machine was built at the Mullard Electronic Research Laboratories of Phillips Electrical Ltd.

The accelerator is used primarily to study the effect of neutrons on nuclei of various elements, a problem of vital importance in the development of atomic energy. One of the main functions of fundamental and applied research on the atom is to find out what materials can be used in atomic piles. If these piles are to be used industrially, pipes will have to be run through them to make use of the heat generated. The materials of which these pipes are made must not absorb too many neutrons or the reaction will be slowed down. Also, the pipes must be able to stand up under the high pile temperatures and particle bombardment.

Measuring Moon Radiation at 24,000 MC

MEASUREMENTS have been made of the thermal radiation from the moon by means of special receiving equipment operating in the 24,000-mc region. From these measurements, estimates may be made of temperature far below the moon's surface, the surface temperature on the dark side of the moon, and much is learned about the nature of the surface of the moon.

The data are displayed in the form of moon temperature versus moon phase curves. These curves are found to be approximately sinusoidal with amplitudes of 52.0 K at the equator and 40.3 K for the average over the moon's surface. The temperature cycle lags the phase angle by about 45 degrees in both cases.

Equipment

The apparatus used in making these measurements is shown diagrammatically in Fig. 1. The 44-inch parabolic-reflector antenna has a pattern width of $\pm \frac{3}{4}$ degrees at half-power points and a power gain



FIG. 1—Receiving equipment used to measure 24,000-mc radiation of the moon

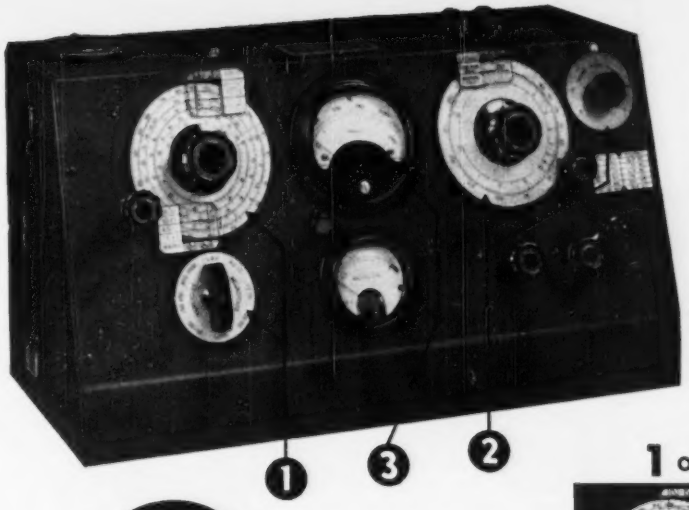

EXAMINE THESE

Direct Reading Features

WHICH SIMPLIFY ACCURATE MEASUREMENTS

The **Q METER**

TYPE 160-A

50 kc. to 75 mc.

Radio frequency circuit design often requires the accurate measurement of Q, inductance and capacitance values. For this application the Type 160-A Q-Meter has become the uncompromising choice of radio and electronics engineers in this country and abroad.

Each component part and assembly used in the manufacture of this instrument is designed with the utmost care and exactness. Circuit tolerances are held to values attainable only in custom built instruments.

With the 160-A Q-Meter, as with other Boonton Radio Corporation instruments, the keynote in design is to embody accurate *direct reading* features which save time and simplify operation.

SPECIFICATIONS

Oscillator Frequency Range: 50 kc. to 75 mc. in 8 ranges.

Oscillator Frequency Accuracy: ±1%, 50 kc.—30 mc.
±3%, 30 mc.—75 mc.

Q Measurement Range: Directly calibrated in Q, 20-250. "Multiply—Q—By" Meter calibrated at intervals from x1 to x2, and also at x2.5, extending Q range to 625.

Q Measurement Accuracy: Approximately 5% for direct reading measurement, for frequencies up to 30 mc. Accuracy less at higher frequencies.

Capacitance Calibration Range: Main capacitor section 30-450 mmf, accuracy 1% or 1 mmf whichever is greater. Vernier capacitor section +3 mmf, zero, −3 mmf, calibrated in 0.1 mmf steps. Accuracy ±0.1 mmf.

Catalog "H" containing further information available upon request. (In Canada, direct inquiries to RCA Victor Co., Ltd., Montreal.)

DESIGNERS AND MANUFACTURERS OF THE Q METER • QX CHECKER FREQUENCY MODULATED SIGNAL GENERATOR • BEAT FREQUENCY GENERATOR AND OTHER DIRECT READING INSTRUMENTS

1 OSCILLATOR FREQUENCY DIAL.



This large 4½" open faced dial has eight overlapping frequency ranges, each calibrated *directly* in kilocycles or megacycles, with scales conveniently divided for maximum readability. A vernier dial drive enables fine settings to be made with ease. All frequency ranges are accurate to within ±1% except the 50-75 megacycle range which is accurate to ±3%. The clearly marked range change switch located directly beneath the frequency dial facilitates rapid and positive selection of the desired frequency band.

2 Q-TUNING CAPACITANCE DIALS.



L-C dial serves twofold purpose of (1) conveniently and accurately indicating tuning capacitance *directly* in MMF, and (2) providing an effective inductance scale which also becomes *direct reading* at certain defined frequencies shown on frequency reference plate. Incremental capacitance dial at right calibrated from +3 MMF through zero to −3 MMF, accurate to ±0.1 MMF.

3 Q-VOLTMETER AND MULTIPLIER METER.



For the indication of Q values the 160-A Q-Meter employs a Weston Model 643 Meter calibrated *directly* in terms of Q over the range from 20-250. The damping of the meter movement is ideal for the rapid determination of exact resonance without sluggishness or overshoot. The lance type pointer enables Q readings to be obtained to the nearest unit. Located directly beneath the Q voltmeter is the "Multiply-Q-By" meter which provides Q multiplier factors of X1 to X1.5 in 0.1 steps, X2, and X2.5 thereby extending the useful range of Q indication to 625. This meter is carefully matched to a particular thermocouple element for maximum accuracy.

BOONTON RADIO Corporation
BOONTON N.J. U.S.A.



FIG. 2—Lunar temperature curves for the average microwave temperature over the moon's surface and at the moon's center

of aproximately 3×10^4. The energy received by the horn at the reflector focus is compared with the thermal radiation from a disc of absorbing material at a fixed temperature.

Comparisons are made by chopping the waveguide signal 25 times a second, beating the chopped signal against a klystron oscillator to produce a 30-mc modulated signal for the i-f amplifier whose output is demodulated to recover the 25-cps signal. This signal is converted to d-c by a rotary contactor, which is synchronized with the chopper, and used to drive a recording milliammeter.

In making measurements the antenna is pointed slightly ahead of the moon and the received signal recorded as the moon passes through the beam. By this means, cosmic noise and atmospheric radiation are held constant and do not affect readings. Receiver calibration is accomplished by substituting a resistor, whose temperature can be adjusted, for the antenna. Corrections must be made for variations of the solid angle subtended by the moon, for variation in gain of the antenna beam over the moon's surface, and for lunar emissivity which is assumed to be 0.9. Figure 2 shows the resulting curves.

Stated mathematically, the average temperature curve becomes $T_{(average)} = 239 + 40.3 \cos(\Omega t - 45°)$ and the equation for the equatorial temperature is $T_{(equatorial)} = 249 + 52.0 \cos(\Omega t - 45°)$ where Ω is the angular velocity of the moon and t the time elapsed since full moon.

The apparent disagreement between these results and similar measurements made previously in the 10-micron region appears to be due to the transparency of the moon to 1¼-cm waves. The surface of the moon is substantially opaque to radiation in the 10-micron region, which makes measurements in that region surface temperatures. The surface temperature variation propagates into the moon as an attenuating temperature wave with a progressively lagging phase. Integration of radiation from all contributing layers substantiates the microwave temperature which has smaller periodic variation and which lags the corresponding surface variation.

Estimates based on the results obtained indicate the temperature far below the surface of the moon to be 234 K, a maximum equatorial temperature of 249 K, and the space average surface temperature of the whole disk of the new moon is 145 K. Further examination of the results substantiate earlier claims of the existence of a layer of poorly-conducting dust on the moon's surface. This layer is probably of the order of 1 mm thick.

This work is described in detail in the *Australian Journal of Scientific Research*, Vol. 2, 1949, by J. H. Piddington and H. C. Minnett of the Division of Radio Physics, Council for Scientific and Industrial Research, Australia.

Stereo Television at Argonne Laboratories

ARGONNE ENGINEERS have developed a system of stereoscopic television for viewing atomic-energy experiments at extreme distances, according to the recently released

(Continued on p 194)

DEVELOPING RADAR FIRE CONTROL FOR AIRCRAFT

Complete bench test set-up at The Glenn L. Martin Co. plant in Baltimore for testing advanced fire control systems for aircraft turrets. Major components of a modern system include (1) sighting system for determining direction and distance of target, (2) computing mechanism for determining where to point guns so bullets will hit target, and (3) motor-driven mechanisms for moving turret and guns and for supplying ammunition. In the more advanced modern systems the operator need only select his target on a radar screen and fire the guns when the target comes into range

Actual Size Photo

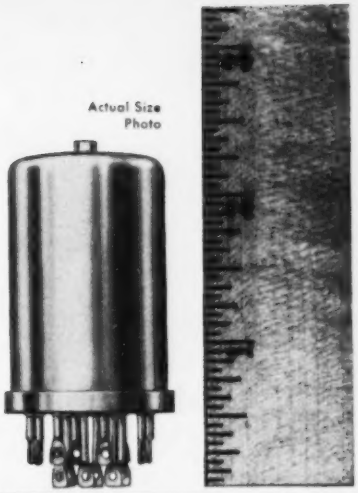

Announcing

A NEW MINIATURE, HERMETICALLY SEALED

Aircraft Type Relay



by "Diamond H"

Apply this unmatched combination of important features to your weight and space requirements:

SIZE: *smallest of its type, 1.5 cubic inches.*

WEIGHT: *lightest of its type, 3.5 ounces.*

SHOCK RESISTANCE: *greatest of its type, 50 G.*

TEMPERATURE RANGE: *widest of its type, —65° C. to +200° C.*

4 POLE DOUBLE THROW

Plus These Other Specifications

1. **CONTACT RATING:** 2 A, 28 V, D.C.; 2A, 115 V, A.C., 400 cycle.
2. **CONTACT OVERLOAD RATING:** 12 A, 28 V, 20 sec.
3. **ALTITUDE RATING:** Dry, inert gas, pressure filled; hermetically sealed.
4. **COIL RESISTANCE:** 300 and 150 ohms.
5. **COIL VOLTAGE:** 28 V, D.C.; amperage .1.
6. **TERMINAL ARRANGEMENT:** Soldered connections.
7. **MOUNTING:** Variable.
8. **VARIATIONS:** Virtually innumerable, in voltage, amperage, number of poles (4 maximum) and temperatures.

* * *

Revolutionary in design, this new miniature relay was developed to meet a highly exacting set of requirements for air, ground and marine applications by The Hart Manufacturing Company . . . producer of dependable electrical controls and devices for over half a century. It incorporates a hitherto unmatched combination of characteristics. We'll gladly work with you to develop any special variation to meet your specific need.

Write today for complete information on this new "Diamond H" relay.

The Hart Mfg. Co.
202 Bartholomew Ave.
Hartford, Conn.

Send me further information about your new relay.

Name _____

Title _____

Company _____

Street _____

City _____ *State* _____

NEW PRODUCTS

Edited by WILLIAM P. O'BRIEN

Miniature Components and Lab Devices in Increased Production . . . Television Equipment Holds Its Own . . . Available Manufacturers' Catalogs Are Announced



UHF Impulse Generator

EMPIRE DEVICES, INC., 38-25 Bell Boulevard, Bayside, N. Y., Model IG-102 uhf impulse generator produces a spectrum, flat within ± 0.5 db over the entire frequency range from 10 kc to 1,000 mc, corresponding to a pulse width of less than 0.001 μsec. Output is 70,000 μv per mc, adjustable over a 60-db range by means of a continuously variable 10-db attenuator and a resistive step attenuator. Continuously adjustable repetition rate from 2.5 cycles to 2,500 cycles is provided. Output impedance is 50 ohms, the vswr being better than 1.2 at all frequencies. The unit may be used for studying transient phenomena, and may also be employed for receiver alignment and bandwidth determination.



Sound Channel Equipment

FEDERAL TELECOMMUNICATION LABORATORIES, INC., 500 Washington Ave., Nutley 10, N. J. The FTL 38-A sound channel equipment provides facilities for the transmission of high-fidelity sound and video over tv radio relay systems, such as the FTL27-A tv uhf radio relay link, eliminating the need for leased high-quality telephone circuits. The complete equipment consists of two units: a submitter (illustrated), which transforms the sound program into an f-m 5-mc subcarrier; and a subceiver, which detects the subcarrier signal at the receiving end and recovers the original sound program. Video input and output levels are 1 to 2.5 v peak-to-peak; video input and output impedances, 75 ohms; noise, 50 db below rated output; and distortion, 40 db below rated output.



Laboratory Monitor

NUCLEAR INSTRUMENT AND CHEMICAL CORP., 229 W. Erie St., Chicago 10, Ill., has announced the model 1615 laboratory monitor for alpha-beta-gamma detection. The instrument may be used for checking clothing, benches, glassware or hands for contamination, or for continuous monitoring of background air contamination or isotope decay. It may also be used to count samples with activities between 100 and 50,000 counts per minute where accuracy of measurement need not be better than 3-percent standard error.

TV Microphone

RADIO CORP. OF AMERICA, Camden N. J. Type BK-4A Starmaker ribbon-pressure microphone, designed especially for the tv industry, is now available for broadcast station uses. It has an output of 110 μv per dyne per cm for an output impedance in accordance with RMA standards of 30, 150 and 250 ohms. It is nondirectional and provides uniform frequency response between 50 and 15,000 cycles. Effective output level at 1,000 cycles is -50 dbm. Hum pickup level is -125 dbm. The microphone features a $\frac{1}{4}$-in. diameter horn for increasing the response in the h-f regions.



Subminiature Tube

SYLVANIA ELECTRIC PRODUCTS INC., 500 Fifth Ave., New York 18, N. Y., has announced a new double-triode subminiature tube providing high performance for a wide range of applications in tv receivers, industrial electronic applications, servomechanisms and radio communications receivers. Transconductance is 4,800 μmhos and amplification

RAYTHEON

WORLD'S LARGEST MANUFACTURERS OF AND WORLD HEADQUARTERS FOR

PULSE TYPE MAGNETRONS — Tunable or fixed frequency — 1,000 to 25,000 megacycles — power range from a few watts to several megawatts.

CW MAGNETRONS — Fixed frequency, tunable and frequency modulated tunable — 1,000 to 10,000 megacycles — power range from a few watts to several kilowatts.

KLYSTRONS — Integral and external cavity, low power — frequency range, 500 to 50,000 megacycles.

SPECIAL PURPOSE TUBES* — Cold-cathode, gas-filled rectifier tubes — ruggedized diodes, triodes and pentodes for aircraft, industrial and military service — voltage regulator, voltage reference and radiation counter (Geiger-Mueller) tubes — germanium crystal diodes.

SUBMINIATURES* — Filamentary and cathode type tubes; fit standard sockets or may be soldered or welded into the circuit. Over 40 types—over half a million in stock—available through 310 Raytheon Tube Distributors.

For detailed information, get in touch with

RAYTHEON MANUFACTURING COMPANY

Power Tube Division — WALTHAM 54, MASS.

***Receiving Tube Division** — NEWTON 58, MASS.

RAYTHEON

Excellence in Electronics

factor per triode section is 35 when 100 volts is used on plates. Input capacitance per plate is 2.0 $\mu\mu$f; output capacitance is 1.0 $\mu\mu$f.

Projection Slave Receiver

SNAIDER TELEVISION CORP., 540 Bushwick Ave., Brooklyn, N. Y., has announced a projection slave receiver that may be attached to any type of tv receiver, regardless of c-r tube size, and will deliver a picture up to 6 ft × 8 ft. It uses only the video signal and sound of the master set, having its own self-contained power supply. Sync and sweep circuits are independent of the master set and the slave unit holds sync even when master goes out of sync. Including the c-r tube there is a total of 21 tubes.



Railroad Radio Equipment

WESTINGHOUSE ELECTRIC CORP., Box 2099, Pittsburgh 30, Pa. Type FE heavy-duty railroad radio equipment contains all the necessary circuits for operation in end-to-end, train-to-train, and wayside-to-train communication. The transmitter is rated at 20 watts output for continuous service, and 30 watts output for intermittent service. The equipment is designed for broad-band operation, to permit multifrequency operation within the frequency band assigned by the FCC for railroad use.

TV Amplifier Tube

GENERAL ELECTRIC CO., Syracuse, N. Y., has available a new double-ended beam-power amplifier tube designed for use as the horizontal-deflection amplifier in tv receivers. When used with suitable components, the 6CD6-G tube is capable of fully deflecting any picture tube having a deflection angle up to 70 degrees and operating at anode voltages up to 14 kv. It is rated with a peak positive pulse plate voltage of 6,000 v; maximum d-c plate voltage of 700 v; plate dissipation, 15 watts maximum; d-c plate current, 170 ma maximum.

Geiger Counter for Prospectors

NUCLEAR INSTRUMENT & CHEMICAL CORP., Chicago, Ill. The Super Sniffer is a Geiger counter designed for uranium prospectors. It detects the radiation reaching the surface of the ground, no matter how deep the source, and indicates the radioactivity by both earphone clicks and neon flashes. When used to check samples its beta window makes it extremely sensitive, and it will detect both beta and gamma radiation. It weighs less than two pounds and is priced at $49.50.



Universal Bridge

FREED TRANSFORMER CO. INC., 1718-36 Weirfield St., Brooklyn 27, N. Y., has introduced the No. 1150 universal bridge with a frequency range from 20 cycles to 20,000 cycles. The unit is designed as a laboratory instrument for measurements of inductors and capacitors, and determination of resistive and reactive components of impedances. It can also be used as a Maxwell bridge, Hay bridge, series resistance capacitor bridge, resonance bridge and parallel resistance capacitor bridge. Accuracy is 1 percent.



High-Fidelity Amplifier

BELL SOUND SYSTEMS, INC., Columbus, Ohio. Model 2145 high-fidelity amplifier with remote control permits switching to and from phono-

(continued on page 220)



ook at the new audiotape*

Yes, you can actually *see* the difference. The way it tracks and winds absolutely flat, due to superior, straight-line s'itting. Its smooth, noncurling flexibility – and the way it rides snugly over the heads without humping away in the middle. And, compared under a microscope, you can see Audiotape's *superior dispersion* of the oxide particles – free from "clumping" which tends to increase background noise. You can tell a lot just by looking at Audiotape, but...



isten to its matchless reproduction

That's the real test. Audiotape actually does "speak for itself." Hear its brilliant high-frequency response – freedom from annoying background noise and distortion. There's *no friction squeal* – no rasping hum from low-frequency modulation noise. And a sensitive ear can appreciate the remarkable *uniformity* of output volume, varying not more than ±¼db for an entire 2500 foot reel.

Original recordings for phonograph records of America's leading artists are made on Audiotape. There must be a reason!



And see how Audio's
IMPROVED PACKAGING
simplifies handling and storage

All 2500 and 5000 foot rolls of Audiotape are individually boxed in specially designed containers (Pat. Pending) that make handling and storage safer and easier than ever before. Tape can be transferred from container to turntable (and vice versa) without danger of slipping from the hub or becoming unwound. Reel side flanges can be attached to hub without removing it from container. In storage, tape hangs from hub core – does not rest on edge of roll.

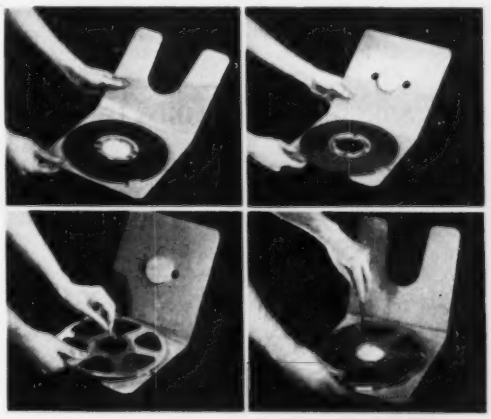

SEND FOR FREE
ONE FOOT SAMPLE
of plastic or paper base
Audiotape today

AUDIO DEVICES, INC.
444 MADISON AVE., NEW YORK 22, N. Y.
Export Dept.: ROCKE INTERNATIONAL, 13 East 40th St., New York 16, N. Y.

*Trade Mark

Makers of
audiodiscs*
. . . the standard of disc recording quality for more than a decade

NEWS OF THE INDUSTRY

Edited by WILLIAM P. O'BRIEN

Civilian Engineers Needed by Armed Services

ELECTRONIC ENGINEERS highly specialized in the communications field are still urgently needed to fill positions in the research and development laboratories of the various branches of the Armed Services. Also critically needed are experienced technical writers and training instructors with extensive electronics or communications equipment background. Details of some of the positions follow:

Intelligence Department, Air Materiel Command, Wright-Patterson Air Force Base, Dayton, Ohio

Air Technical Intelligence Specialist (Electronics) ($8,800). Supervises the branch responsible for estimation of performance, characteristics and technical capabilities of foreign airborne and ground radar, radio navigation, communications, and guided missile control systems.

Air Technical Intelligence Specialist (Guided Missile Control) ($7,600). Conducts air intelligence research in the determination of the performance characteristics and technical capabilities of foreign guided missile control systems.

Air Technical Intelligence Specialist (Radio Navigation) ($6,400). Conducts air intelligence research in the determination of the performance characteristics and technical capabilities of foreign radio navigation systems.

Air Technical Intelligence Specialist (Communications) ($6,400). Conducts air intelligence research in the determination of performance characteristics of communication systems.

Air Technical Intelligence Specialist (Electronics) ($8,800). Supervises the branch responsible for the estimation of capabilities of foreign developments in countermeasure equipment and methods. Supervises classified electronic projects.

Air Technical Intelligence Specialist (Electronics) ($7,600). Conducts air intelligence research in the determination of various parameters associated with electromagnetic propagation and radiation as they affect air force type equipment. Also conducts air intelligence research on a classified project.

Air Technical Intelligence Specialist (Electronics) ($8,800). Supervises the branch responsible for the determination of foreign technical accomplishments and capabilities in the fields of electronic components, wave propagation, military infrared developments, circuit analysis, high-frequency vacuum tubes and semiconductors, as they affect air force type equipment.

Air Technical Intelligence Specialist (Electronics) ($5,400). Conducts air technical intelligence research in the determination of alien accomplishments relative to electronic components and devices as they affect air force equipment.

Air Technical Intelligence Specialist (Electron Physics) ($7,600). Conducts air intelligence research in the determination of alien capabilities in the field of electron physics. Specifically, this research covers wave propagation, high-frequency vacuum tubes, semiconductors, infrared theory and devices, and circuit analysis as these affect air force type equipment.

Signal Corps, Civilian Personnel Branch, Bldg. T-530, Fort Monmouth, N. J.

Electronic Engineer ($3,825 for grade GS-5 requiring 4 years college or 4 years engineering experience or any time-equivalent combination thereof, to $6,400 for grade GS-12 requiring 8 years of college education and engineering experience). Participates in the design, development, modification, construction and testing of electronic equipment such as radar, radio and wire communications equipment and components; electron tubes, electronic control and measurement instruments, sonar equipment and similar devices; plans and computes processes; prepares sketches; conducts performance tests; interprets and evaluates test findings, and prepares technical reports.

Technical Writer ($3,100 for grade GS-5 requiring 3 years writing experience or 4 years college education, to $5,400 for grade GS-11 requiring 5½ years professional experience or one year of appropriate education for each 9 months experience). Writes, edits and prepares technical publications, handbooks, pamphlets, circulars, instruction books, etc. Edits and revises scientific manuscripts on

SIGNAL CORPS RADIOS IMPROVED

Radically redesigned handie-talkie and walkie-talkie radios help to coordinate infantry, armor, artillery and supporting troops. Both are now frequency modulated. The new version walkie-talkie (right) weighs about 20 lb and measures 16 in. high x 9 in. wide x 3 in. deep. Its range is up to 5 mi. The new 1-m battery-operated handie-talkie (left) has a range of about 1 mile

UHF

DEVELOPMENT

DESIGN

MANUFACTURE

EQUIPMENT

. . . If UHF design or development is a major problem with you, or . . .

. . . If low-unit manufacturing cost is essential to satisfactorily meet competition, or . . .

. . . If trustworthy, confidential collaboration is a highly necessary factor . . .

THEN Lavoie Laboratories, Inc. can be of invaluable assistance. We have the Engineering Staff . . . the shop techniques . . . a competent understanding of government contract procedures . . . and the reputation for satisfactorily meeting *all* of these requirements.

We welcome your inquiries on any phase of UHF design, development or production.

LAVOIE PRODUCTS INCLUDE:

RADAR RECEIVERS
RADIO RECEIVERS
SIGNAL GENERATORS
FREQUENCY METERS
ANTENNA EQUIPMENT
PULSE GENERATORS
OSCILLOSCOPES
RADAR BEACONS
COMMUNICATION SYSTEMS
CRYSTAL IMPEDANCE METERS
ETC., ETC.

Lavoie Laboratories, Inc
MORGANVILLE, N. J.

radio, radar, electronics, communications and photography. Writes instruction manuals on theory, operation and maintenance of Signal Corps equipment; determines media and method of presentation of material. Prepares charts, graphs, schematic diagrams, etc., for inclusion in technical literature.

Military Instructor ($3,100 for grade GS-5 requiring 4 years experience in testing, servicing and maintenance of communication equipment or 4 years college or trade or vocational school above high school level, to $4,600 for Grade GS-9 requiring 6 years experience and education). Instructs classes of military personnel in one or more of the following subjects: Microwave Radio Relay, Radar, Radio Electronics, Fixed Station Radio, Central Office Techniques, Teletype Installation and Maintenance, Repeater and Carrier, Dial Central Office Maintenance, and Theory of Electricity. For GS-9, also investigates and prepares course material and study guides and devises visual training aids. Theory of Electricity requires only three years of experience, education or a combination of both. Applicants hired at the Grade GS-5 level will be given six months intensive accelerated training in the plans, methods, and techniques of teaching before assignment as instructors.

IRE Announces Awards

THE Institute of Radio Engineers will award the 1951 Medal of Honor to Vladimir K. Zworykin, director of electronic research and vice-president of RCA Laboratories Division, Princeton, N. J. The Medal of Honor is awarded annually in recognition of distinguished service rendered through substantial and important advancement in the science and art of radio communication. It will be presented at the annual banquet during the IRE National Convention, March 19 to 22, 1951, at the Waldorf-Astoria Hotel, New York City.

In making this award the board of directors of the Institute also conferred the grade of Fellow, highest grade of membership in the IRE, upon 41 outstanding engineers and scientists in radio and allied fields. Recipients of the Fellow award, which will also be presented at the annual banquet, are as follows:

R. Adler of Zenith Radio Corp., Chicago, Ill.; J. G. Brainerd of U. of Pennsylvania, Philadelphia, Pa.; C. G. Brennecke of N. Carolina State College, Raleigh, N. C.; R. D. Campbell of AT&T Co., New York, N. Y.; R. W. Deardorff of The Pacific Tel. & Tel. Co., Portland, Oregon; J. H. DeWitt, Jr., of Radio Station WSM, Inc., Nashville, Tenn.; H. F. Elliott of Palo Alto, Calif.; C. G. Fick of GE Co., Schenectady, N. Y.; E. L. Ginzton of Stanford U., Calif.; W. M. Goodall of Bell Labs, Inc., Deal, N. J.; J. T. Henderson of National Research Council, Ottawa, Canada; C. J. Hirsch of Hazeltine Electronics Corp., Little Neck, N. Y.; W. E. Jackson of CAA, Indianapolis, Ind.; J. B. Johnson of Bell Labs Inc., Murray Hill, N. J.; A. G. Kandoian of Federal Telecommunication Labs, Inc., Nutley, N. J.; C. E. Kilgour of Avco Corp., Cincinnati, Ohio; T. J. Killian of ONR, Washington, D. C.; J. B. Knox of RCA Victor Co., Ltd., Montreal, Canada; V. D. Landon of RCA Labs, Princeton, N. J.; G. Lewis of IT&T Co., New York, N. Y.; H. R. Lubcke of Don Lee Broadcasting System, Hollywood, Calif.; D. G. C. Luck of RCA Labs., Princeton, N. J.; J. F. Morrison of Bell Labs, Whippany, N. J.; G. A. Morton of RCA Labs, Princeton, N. J.; G. W. Olive of Canadian Broadcasting Corp., Montreal, Canada; O. W. Pike of GE Co., Schenectady, N. Y.; L. E. Reukema of U. of Calif., Berkeley, Calif.; H. W. G. Salinger of Farnsworth Research Corp., Fort Wayne, Ind.; O. H. Schade of RCA Victor, Camden, N. J.; W. E. Shoupp of Westinghouse Electric Corp., Pittsburgh, Pa.; F. F. Sliling of RCA Frequency Bureau, New York, N. Y.; H. R. Skifter of AHA, Inc., Mineola, N. Y.; H. R. Teare, Jr., of Carnegie Institute of Technology, Pittsburgh, Pa.; G. N. Thayer of Bell Labs, Inc., New York, N. Y.; H. P. Thomas of GE Co., Syracuse, N. Y.; W. C. Tinus of Bell Labs, Inc., Whippany, N. J.; E. Weber of Polytechnic Institute of Brooklyn, Brooklyn, N. Y.; R. H. Williamson of GE Co., Syracuse, N. Y.; W. T. Wintringham of Bell Labs, Inc., Murray Hill, N. J.; and G. A. Woonton of McGill U., Montreal, Canada.

RTMA Replies to FCC on Color Video

IN A LETTER to the secretary of the Federal Communications Commission, Robert C. Sprague, president of Radio-Television Manufacturers Association, stated that the RTMA "has never attempted to, and cannot require its members to build, or refrain from building, particular sets or sets of particular capabilities." The letter went on to say that decisions whether to build sets incorporating bracket standards for the reception of both CBS color and standard monochrome television transmissions would be left entirely up to the individual members.

This policy was decided during a three-day conference in New York from September 18 to 20. Although most members were present, big producers Philco and RCA were significantly absent. The meeting was called to discuss an answer to what RTMA calls "certain language in the Commission's report" (First Report of Commission—Color Television Issues) that "suggests that the Commission may have believed that the Radio-Television Manufacturers Association should, as a group, provide the Commission with the answer as to whether its members would, or would not, build sets to reflect bracket transmission standards".

At the same time, the Association indicated that it had disseminated copies of the Commission report to its membership and requested that the FCC advise RTMA if it feels the Association can do anything further to cooperate. Appropriate panels of the National Television System Committee will submit com-

(Continued on page 264)

MEETINGS

OCT. 23–27: AIEE Fall General Meeting, Skirvin Hotel, Oklahoma City, Okla.

OCT. 26–28: Second Audio Fair, sponsored by the Audio Engineering Society, Hotel New Yorker, New York City.

OCT. 30–NOV. 1: Radio Fall Meeting, sponsored jointly by IRE and RTMA engineering department, Hotel Syracuse, Syracuse, N. Y.

JAN. 10–12: Second High Frequency Measurements Conference, sponsored by AIEE, IRE and NBS, Hotel Statler and Dept. of Interior Auditorium, Washington, D. C.

MARCH 5–9: ASTM Spring Meeting and Committee Week, Cincinnati, Ohio.

MAR. 19–22: IRE Annual Convention, Hotel Waldorf Astoria and Grand Central Palace, New York City.

JUNE 18–22: ASTM Annual Meeting, Atlantic City, New Jersey.

VOLTAGE REGULATED POWER SUPPLIES

For Industrial and Research Use

MODEL 510

Model 510 features TWO COMPLETELY INDEPENDENT REGULATED POWER SUPPLIES.

OUTPUT DC FOR EACH SUPPLY: 200-500 volts, 200 Ma.
REGULATION: ½% for both line and load variations.
RIPPLE: 5 millivolts.
OUTPUT IMPEDANCE: 2 ohms.
OUTPUT AC FOR EACH SUPPLY: 6.3 volts, 6 Amp., CT.

The supplies may be connected for series, parallel, or bucking operation.



MODEL 245

OUTPUT DC: 200-500 volts, 200 Ma.
REGULATION: ½% for both line and load variations.
RIPPLE VOLTAGE: 5 millivolts.
OUTPUT IMPEDANCE: 2 ohms.
OUTPUT AC: 6.3 volts, 6 Amp., CT, unregulated.



MODEL 103, MULTIPLE POWER SUPPLY

TWO B SUPPLIES: 0-300 volts, 75 Ma. each, 150 Ma. when paralleled. Ripple 10 millivolts. Unregulated.
ONE C SUPPLY: Minus 50 volts to plus 50 volts, 5 Ma. Ripple 5 millivolts. Unregulated.
ONE FILAMENT SUPPLY: 6.3 volts AC, 5 Amp.

MODEL 515

B SUPPLY: 0-500 volts, 200 Ma.
REGULATION: ½% for both line and load variations.
RIPPLE: 5 millivolts.
OUTPUT IMPEDANCE: 2 ohms.
C SUPPLY: 0-150 volts, 5 Ma.
REGULATION: 10 millivolts for line 105-125 volts. ½% for load at 150 volts.
RIPPLE: 5 millivolts.
FILAMENT SUPPLY: 6.3 volts AC, 10 Amp., CT.

This unit is available with a 300 Ma. B Supply; with or without C Supply.

MODEL 315

B SUPPLY: 0-300 volts, 150 Ma.
REGULATION: ½% for both line and load variations.
RIPPLE: 5 millivolts.
OUTPUT IMPEDANCE: 2 ohms.
C SUPPLY: 0-150 volts, 5 Ma.
REGULATION: 10 millivolts for line 105-125 volts. ½% for load at 150 volts.
RIPPLE: 5 millivolts.
FILAMENT SUPPLY: 6.3 volts AC, 5 Amp., CT.



MODEL 600

Model 600 features TWO INDEPENDENT REGULATED POWER SUPPLIES.

OUTPUT DC FOR EACH SUPPLY: 0-500 volts, 200 Ma.
REGULATION: ½% for both line and load variations.
RIPPLE: 5 millivolts.
OUTPUT IMPEDANCE: 2 ohms.
OUTPUT AC FOR EACH SUPPLY: 6.3 volts, 10 Amp., CT, unregulated.

Write for specifications on our complete line of power supplies

KEPCO LABORATORIES, inc.

149-14—41st AVENUE (Dept. A) FLUSHING, NEW YORK

NEW BOOKS

The Magnetic Amplifier

BY J. H. REYNER. *Stuart and Richards, London, 1950, 119 pages, 15 shillings.*

WITHIN very recent years the possibilities of saturable-core reactors as current-amplifying and current-control devices have come into considerable prominence. The literature on this subject is extensive but scattered and most of it is difficult to understand.

The author of this book has set himself the task of bringing down to earth the basic principles of the transductor and its application to control problems. By comparing tube principles and circuits with transductors he has, virtually without mathematics, succeeded in making the subject clear.

This book is a "first reader" and does not go into the many intricate and erudite aspects of the matter, but having digested the contents of its hundred-odd pages, the reader should be prepared to go on to the more extensive literature.

The transductor plus the metal rectifier offer great future control possibilities. It is high time that electronic engineers get familiar with the principles and applications thereof.—K. H.

RELEASED THIS MONTH

Industrial High Frequency Power: E. May: Wiley: $5.00.

Ionisation Chambers and Counters: D. H. Wilkinson: Cambridge University Press: $4.50.

Radio Communication at Ultra High Frequency: J. Thomson: Wiley: $4.50.

Survey of Modern Electronics: Paul G. Andrae: Wiley: $5.75.

Transmission Lines and Filter Networks: J. J. Karakash: Macmillan: $6.00.

Transmission Lines and Networks: W. C. Johnson: McGraw-Hill: $5.00.

Television Servicing

BY SOLOMON HELLER AND IRVING SHULMAN. *McGraw-Hill Book Co., New York, 1950, 434 pages, $5.50.*

AN ATTEMPT at a practical view approached in a simplified language. In general it succeeds very well. On occasion it labors under excessive effort, but these instances are held to a minimum.

The authors' preface remarks indicate possible use as a textbook for servicemen. From the technical aspect it can very well fulfill this expectation.

There is sufficient information on each portion of the television circuit to enable the reader thoroughly to understand the operation, and

(continued on p 138)

BACKTALK

This Department is Operated as an Open Forum Where Readers May Discuss Problems of the Electronics Industry or Comment Upon Articles that ELECTRONICS has Published

Old Timer

DEAR SIRS:

IN REGARD to the $600 German Watch Rate tester (ELECTRONICS, p 170 June 1950) Mr. Drieselmann's invention is only a very poor variation of an old principle, which was, as much as I know, first filed for patent by A. P. Davis, February 5, 1927 (patent No. 1,769,988).

Drieselmann is measuring the time between coincidences of the strokes of a standard watch and the X-watch. This means for most watches a time difference of 0.2 second. If it takes 3 minutes to build up this difference, the X-watch is 96 seconds per day slow or fast. For ten seconds a day it will take about 30 minutes.

Therefore, this test device is usable only for very poor qualities of watches, not for good ones.

It is much better to get a line record of the actual phase difference of the two watches; the angle of the line to the center line of the chart gives the watch rate and it is possible to see within seconds (not minutes) what the speed is.

The most serious difficulty is, however, the watch itself. The speed changes very much depending on whether the watch is fully wound, 9/10 wound, half wound and so on. For a good test you have to make measurements at different spring tensions.

You can find many diagrams showing the speed of different types of watches in "ATM" (Archiv fuer Technisches Messen) under J 154, where I have published the diagrams from many tests about 15 years ago.

American watchmakers have been using such devices for more than 20 years. You may see them in many watchmakers' shops in the city. They are a great help to recognize a bad watch within a minute, but it is impossible to set the speed for a day's run within three minutes. This can only be done in mass production if you assume that all watches have the same uniform spring characteristic.

GEORGE KEINATH
Larchmont, New York

Electronics Quiz

THIS MONTH'S BRAIN-TEASER was submitted by Bob Wakeman of Bloomfield, New Jersey.

What is the impedance across the input terminals of the infinite ladder shown? Assuming R_1 to be 2 ohms, and R_2 to be 4 ohms, find R



The answer to this problem will appear in next month's Backtalk along with another problem. Readers are encouraged to submit puz-

(Continued on page 272)



Record of vibration of an oil burner installation during 1/30 of a second, photographed on oscillograph screen.



Oscillogram of vertical acceleration at the motor housing of a bench grinder, showing its vibration pattern.

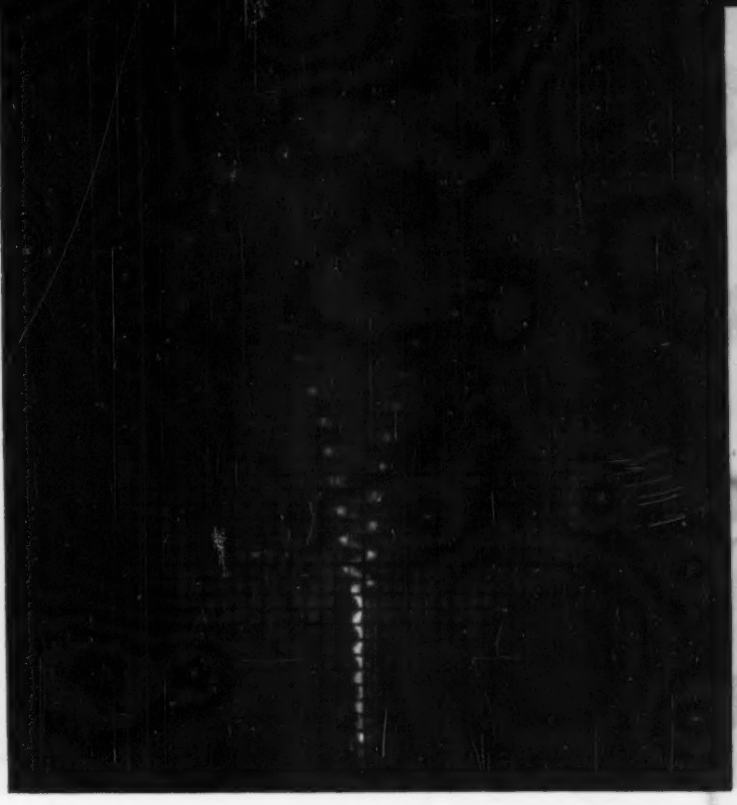

Pin down the fleeting

oscillograph trace . . . by PHOTOGRAPHY

You can save lots of time and settle arguments when you photograph the evidence of oscillograph traces. Even the fastest transients can be preserved . . . for leisurely study and for permanent records.

For most cathode-ray oscillograph work the best film is Kodak Linagraph Pan Film. With the highest practical light sensitivity, it holds its emulsion speed at writing rates of thousands of miles per second. When you're faced with special problems requiring low red sensitivity, the recommended film is Kodak Linagraph Ortho Film.

Kodak Linagraph Films are available in 16mm. and 35mm. widths on daylight- and darkroom-loading spools. The 35mm. width is also furnished in 36-exposure cassettes. All are sold by the Kodak Industrial Dealer in your area. Eastman Kodak Company, Industrial Photographic Division, Rochester 4, N. Y.

Photorecording

. . . an important function of photography

Kodak
TRADE-MARK

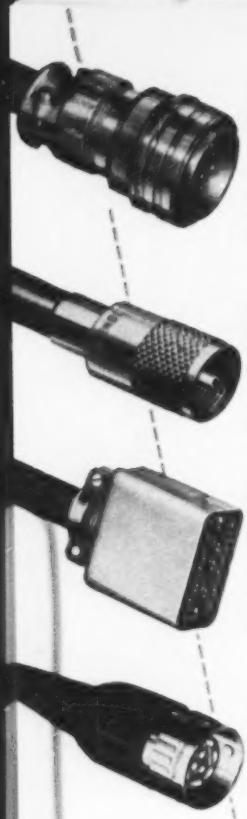

AN CONNECTORS for power, signal and control circuits in aircraft and electronic equipment. AMPHENOL, by far the largest supplier of quality connectors, leads with the broadest availability listing of AN Connectors for all MIL-C-5015 shell styles and applications. This leading position is assured by AMPHENOL'S continuing development and tooling program.

RF CONNECTORS for instruments, test equipment and all types of industrial applications. Extensive research and manufacturing facilities have made AMPHENOL RF Connectors outstanding in design. They have longer leakage paths, lower loss resulting in outstanding performance.

MINIATURE CONNECTORS

AMPHENOL Rack and Panel Connectors have eyelets inserted in the mounting holes for added strength, holes for wiring instead of the usual hooks on the male contacts, and interlocking barriers to prevent accidental shorting. Another AMPHENOL product of precision design!

AUDIO CONNECTORS now standard for audio circuits on Signal Corps communication equipment. AMPHENOL'S superior design provides watertight lock and spring-loaded contacts which have low voltage drop and are self-cleaning.

Mechanically Efficient—Electrically Correct
COMPONENTS FOR RADIO AND ELECTRONICS

AMPHENOL products include the most complete line of cables, plugs, connectors, fittings and plastic components available from any one source in the world today. Quality of product and outstanding design are assured by AMPHENOL'S extensive engineering and research staff plus the most comprehensive testing laboratories in the field. Specify AMPHENOL . . . the quality name in electronics!

AMPHENOL



AMERICAN PHENOLIC CORPORATION
1830 South 54th Avenue, Chicago 50, Illinois.

☐ Send me the 48 page general CATALOG No. 74.
☐ Add my name to your mailing list for monthly information on currently new products and technical data . . . AMPHENOL ENGINEERING NEWS.

NAME_____
FIRM NAME_____
ADDRESS_____
CITY_____ STATE_____

yet not be burdened with extraneous material.

The authors have done very well with the difficult job of including a service analysis on each portion of the receiver. These thorough analyses can be used to extremely good advantage by the beginner who lacks the practical approach. A good practical serviceman must utilize a quick analytical approach which can be developed and sharpened by careful consideration of the analyses presented.

Unfortunately the book gets off to rather a slow start due apparently to the authors' lack of practical experience in antenna installation work. The first few chapters carry a few rather extraneous theoretical considerations and neglect many minor, but accumulatively important, practical considerations. This lack of the practical accounts for a lack of emphasis, leaving the beginner with that "textbook" feeling. The material presented is accurate technically but lacks this practical tempering. These deficiencies exclude the book from the "excellent" classification, but in spite of this criticism the book is well worth having. Practical additions to the early chapters could make a second edition top-notch.—EUGENE ECKLUND, *Bergen-Passaic Electronics, Inc., Bogota, N. J.*

The Principles of Scientific Research

BY PAUL FREEDMAN. *Public Affairs Press, Washington, D. C.*, 1950, 222 *pages*, $3.50.

THE AUTHOR says in the introduction that he has written this book for young men and women who are embarking on research as a career or are considering the possibility of doing so. He also has hopes that people in executive positions responsible for directing such young people will benefit from the ideas presented. He distinguishes clearly between the terms "science" and "scientific research", but states that scientific research is by far the most important constituent of science.

The first chapter is a very interesting history of the development of methods in scientific research. Such scholars as Aristotle believed

HOW well does a glove fit?

As well as it's made, no better

The same is true of **chassis.**

For years, we have been fabricating sheet metal **chassis** for the electronic, radar and television industries. Naturally, we have had to work to the most critical tolerances. **Chassis** are a specialty with us. We are equipped to serve you on either short runs or production runs in steel, stainless steel and aluminum. Donnelly-designed and engineered products are your best insurance against production breakdowns. Don't take a chance — take Donnelly.



Donnelly MANUFACTURING

A DIVISION OF JOHN DONNELLY & SONS
3134 WASHINGTON ST., BOSTON, MASS.

ARMED FORCES U.S. CERTIFIED

PRECISION SHEET METAL & PRESSED WOOD FABRICATION

Maximum Reliability Every Time
with AIRPAX CHOPPERS

now . . . the A586



60 CYCLE CHOPPER

Precision engineered for reliability . . .

for amplification of low level DC signals . . . The A586 is supplied hermetically sealed . . . almost unaffected by shock, vibration, temperature extremes.

AIRPAX PRODUCTS COMPANY
DESIGNERS ENGINEERS

1024 GREENMOUNT AVE. BALTIMORE 2, MARYLAND

EISLER
Television Tube MACHINERY



- ECONOMICAL
- MODERN DESIGN
- PRODUCTION ENHANCING

No. 102 YID

EISLER'S Electronic Equipment is especially Designed and Built to your exact requirements.
From 5" to huge 24" Television Tube

EISLER specializes in GLASS WORKING MACHINERY for the manufacture of: Cathode Ray; Radio Tubes (Standard, Miniature, Sub Miniature); Fluorescent Lamps; Glass Ampoules; Vials; Incandescent Lamps.

• Consultation without any obligation on your part is cordially invited.

No. 57 YID



RESISTANCE WELDERS
•
¼ to 300 KVA

EISLER TRANSFORMERS
STANDARD • SPECIAL
Air, Oil or Water Cooled
•
Sizes From ¼ to 500 KVA

EISLER ENGINEERING CO., INC.
751 SOUTH 13th ST. • NEWARK 3, NEW JERSEY

record patterns from your OSCILLOSCOPE

with the new Oscillo-Tracer

— as easy as writing your name!

— simpler than a photo record!

Here is a new, inexpensive accessory to multiply the usefulness of your 'scope . . . fits *any* standard 'scope . . . useful with *every* 'scope. Puts pattern on paper for *accurate* tracing, all in just a few seconds!

Many new and valuable uses

- Read traces on graph paper, log, semi-log, decrement, etc.
- Compare traces by super-position.
- Detect small, slow pattern changes.
- Measure amplitude and wave forms accurately.

The OSCILLO-TRACER is a precise optical instrument that superimposes the cathode-ray image on a sheet of paper or right in your lab note book. Uses a newly developed, double-coated lens — high-reflection upper surface, high-transmission lower surface. Heavy, cast base contains lamp to light record paper.

This useful accessory to every 'scope costs only $19.50. *The first cost is the last cost.*

ORDER TODAY from

Robert A. Waters, Inc.
4 Gordon Street, Waltham 54, Mass.

For more dependable Switchgear, Specify I-T-E

For more dependable Insulation, Specify NATVAR 400 EXTRUDED VINYL TAPE

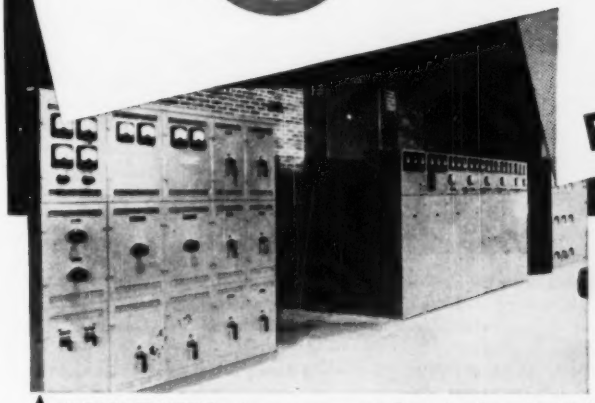

↑ I-T-E MULTUMITE Switchgear is compact and efficient. It is designed and built to provide positive protection of secondary distribution systems with an extra margin of safety for uninterrupted service. Instrument transformers are designed specifically for switchboards.

Natvar 400 Extruded Vinyl Tape is used on this Type C-2, 5,000 volt, 600 amp. primary → transformer coil to protect the instrument circuit, because it has good dielectric strength, requires fewer layers than VC, is flexible enough to conform to sharp bends without wrinkling, and because it has adequate heat resistance.

Natvar

Natvar Products

- Varnished cambric—straight cut and bias
- Varnished cable tape
- Varnished canvas
- Varnished duck
- Varnished silk
- Varnished special rayon
- Varnished Fiberglas cloth
- Silicone coated Fiberglas
- Varnished papers
- Slot insulation
- Varnished tubings and sleevings
- Varnished identification markers
- Lacquered tubings and sleevings
- Extruded vinyl tubing and tape
- Extruded vinyl identification markers

Ask for Catalog No. 21

For more than 60 years I-T-E has been known in the electrical industry for the *quality* of its products. This reputation has been maintained through sound engineering and manufacturing skill.

Component parts and materials that go into I-T-E Switchgear are the finest obtainable, and are carefully coordinated into efficient functional units. Natvar 400 extruded vinyl tubing and tape and other Natvar flexible insulations are used because they consistently meet I-T-E's rigid requirements.

Natvar 400 and other Natvar flexible electrical insulating materials are available for immediate delivery, either from your wholesalers' stocks or direct from our own.

THE NATIONAL VARNISHED PRODUCTS Corporation

Telephone Rahway 7-8800

Cable Address NATVAR: Rahway, N. J.

201 RANDOLPH AVENUE ★ WOODBRIDGE, NEW JERSEY

NOW — BETTER THAN EVER
at no increase in price
LORD
MULTIPLANE
MOUNTINGS
for All-Direction Vibration Protection


SQUARE

ROUND

DIAMOND

HOLDER

Lord Multiplane Mountings are now protected against attack from oil, gasoline, cleaning solvents, ozone, and other enemies of rubber.

The rubber flexing element is protected by a thin, tough, elastic material which resists attack and prolongs the life of Multiplane Mountings under adverse conditions . . . an added value at no increase in price.

This illustrates LORD policy—to produce the very best Quality BONDED-RUBBER (rubber-bonded-to-metal) parts possible. Through constant research new materials are investigated, new processes tested, and new methods developed to supply long-lasting vibration-control mountings for product improvement.

Vibration control increases accuracy and improves performance of products . . . reduces maintenance . . . builds sales. Investigate Lord Vibration-Control Mountings and Bonded-Rubber Parts. Write to attention of Product and Sales Engineering Department.

LORD MANUFACTURING COMPANY
ERIE, PENNSYLVANIA

Canadian Representative:
Railway & Power Engineering Corporation, Ltd.

LORD BONDED RUBBER
Vibration-Control Mountings
. . . Bonded-Rubber Parts

that they could develop science by purely mental processes, and at a time when slavery was the custom they felt that any resort to use of their hands was beneath their status. This did a great deal to retard progress of science, and the author shows how gradually the experimental method became accepted as the basis for scientific research. The dual nature of matter growing out of quantum mechanics again places emphasis upon the importance of the hypothesis in scientific research, now used as a guide for experimental work rather than as something holy and unimpeachable in itself.

The society in which the scientist lives has a profound influence upon science. The author is frank in bringing out the hardships which this can impose upon a scientific research worker, but also points out the advantages that a scientist living today has in this regard in comparison with those of the past.

The correct mental approach is treated under the subjects: clarity of mind, a combination of imagination and caution, of receptivity and skepticism, of patience and thoroughness, and of ability to finalize, of intellectual honesty, of a love of discovery of new knowledge and understanding and of singleness of purpose. Education can be an asset, but the young research worker should have no illusion about how little it is compared with what he or she could acquire during succeeding years.

The planning of research is treated in considerable detail, including consideration of the nature of the problem, the method which the investigator proposes to apply, the thoroughness, the available resources, and the available time. The scientist who takes care of all the research himself is compared with the team organization, and the conditions are considered under which research can be successfully delegated. The accuracy required and the minimum number of essential observations are treated in terms of the desired result and the amount of effort required to achieve it. Since practically all research is sponsored, the scientific research worker should seek to know and understand the ways of patrons who

HI-Q COMPONENTS

Capacitors
Trimmers • Choke Coils
Wire Wound Resistors

BETTER 4 WAYS

- PRECISION
- UNIFORMITY
- DEPENDABILITY
- MINIATURIZATION

● The engineering laboratory is the alert guardian of **HI-Q** quality. No component can be put into production until it has proven that it meets **HI-Q's** exacting standards to the complete satisfaction of these technicians. It is their further responsibility to see that standards are rigidly maintained during production runs. In addition, **HI-Q** engineers are always available to work with your engineers in the development of components to meet your specific needs. Feel free to call on them whenever and as often as you see fit.

If you haven't received your copy of the new HI-Q Datalog, write today.

JOBBERS — ADDRESS: 740 Belleville Ave., New Bedford, Mass.

HI-Q

Electrical Reactance Corp.

OLEAN, N. Y.

SALES OFFICES: New York, Philadelphia
Detroit, Chicago, Los Angeles

PLANTS: Olean, N. Y., Franklinville, N. Y.
Jessup, Pa., Myrtle Beach, S. C.

INSULATION

FORMVAR • FORMEX • ENAMEL

STRIPPED CLEAN IN SECONDS

with **X-VAR**

X-VAR is non-corrosive, non-creeping — leaves wire ready for soldering. Now in use by leading manufacturers of electrical products. Write for FREE SAMPLE for testing.

FIDELITY CHEMICAL PRODUCTS CORP.
472 Frelinghuysen Avenue, Newark 5, New Jersey

TAPE WOUND CORES

Custom made in size and shape . . . of all high permeability magnetic materials, including ORTHONOL,* the new rectangular loop material . . . cased in protective plastic boxes . . . annealed in hydrogen by our exclusive techniques . . . but competitively priced.

The same special annealing and matching techniques we use in our magnetic amplifiers are available to you upon request.

*A DEVELOPMENT OF THE NAVAL ORDNANCE LABORATORY

MAGNETICS, INC.

Specializing in High Permeability Magnetics and Magnetic Amplifiers

BUTLER, PENNSYLVANIA PHONE 54-145

NC

NATIONAL

• **P**roven
• **D**ependable
• **Q**uality

HEAT RADIATING CAPS

Designed to government specifications. Aluminum contact fingers are integral with radiating fins. Tension on fingers maintained by an encircling steel spring. 6/32" tapped center hole for attaching grid ribbon or other lead. Crimped beryllium copper, silver-plated grid ribbon 3¼" long, supplied with each cap. Special lengths can be supplied to manufacturers in quantities. Caps available to fit all popular tubes. Write for details and drawings.

Address export inquiries to

Export Div., Dept. E-1150

PRECISION FREQUENCIES

ACCURACY: 1 PART IN 100,000 (OR BETTER) .001%

FOR USE IN SUCH FIELDS AS

AVIATION
ASTRONOMY
BALLISTICS
HIGH-SPEED PHOTOGRAPHY
VISCOSITY MEASUREMENT
NUCLEAR PHYSICS
TELEMETERING
RADIATION COUNTING
FLUID FLOW
CHEMICAL REACTION
NAVIGATION
SCHOOL LABORATORIES
INDUSTRIAL RESEARCH LABS.
ACCURATE SPEED CONTROL

The controlling unit of these frequency standards is a bi-metallic fork, temperature-compensated and hermetically sealed against humidity and variations in barometric pressure. When combined with related equipment, accurate speed and time controls are afforded by mechanical, electrical, acoustical or optical means.

Instruments of our manufacture are used extensively by industry and government departments on such precision work as bomb sights and fire control.

Whatever your frequency problems may be, our engineers are ready to cooperate.

When requesting further details, please specify the Type Numbers on which information is desired.



TYPE 2001-2. BASIC UNIT
Frequencies, 200 to 1500 cycles. Dividers and Multipliers available for lower and higher frequencies. Miniaturized and JAN construction. Output, 6 volts.



TYPE 2005. UTILITY UNIT
consists of Type 2001-2 and booster to provide 10 watts at 110 V at 60 cyc. Input, 50-100 cyc.

TYPE 2121A. LAB. STANDARD
Outputs, 60 cycle, 0-110 Volts. 120-240 cycle impulses.
Input, 50-400 cycles, 45 W.

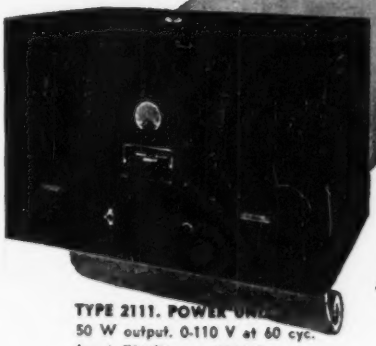

TYPE 2111. POWER UNIT
50 W output, 0-110 V at 60 cyc.
Input, 50-100 cyc., 275 W.

American Time Products, Inc.
580 Fifth Avenue *New York 19, N. Y.*

OPERATING UNDER PATENTS OF THE WESTERN ELECTRIC COMPANY

Made to Order for QUALITY, ECONOMY and PERFORMANCE

Lewis TELEVISION COILS, SPRINGS AND WIREFORMS

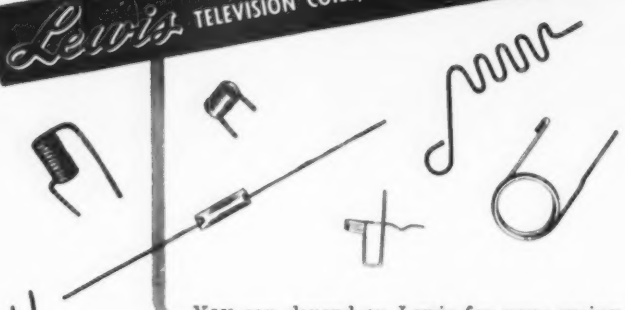

YOU can depend on Lewis for your spring needs — whether job-designed or made to specification — for Lewis has the experience, facilities and know-how essential to designing and manufacturing *practical* springs, wireforms and television coils at *practical* prices. Highly efficient methods and techniques of manufacturing developed by Lewis permit economical, high production.

Lewis Engineers, long experienced in spring design and application, can help you select the *right* springs for the job — springs that past experience has proved most economical and efficient for the exact use. Quality is essential but "fancy extras" that don't contribute to product efficiency of operation are not considered.

Lewis Spring Engineers welcome the opportunity to discuss your spring, coil or wireform requirements without obligation. Call or write today.

LEWIS SPRING & MANUFACTURING COMPANY
2656 West North Avenue, Chicago 47, Illinois

Lewis PRECISION SPRINGS

THE FINEST LIGHT SPRINGS AND WIREFORMS OF EVERY TYPE AND MATERIAL

supply the facilities and his livelihood.

The book is written in readable style with numerous examples. The author has given considerable original thought to the problems and presents viewpoints which are well worth considering. The book is recommended for interesting and instructive reading.—WALDO H. KLIEVER, *Director of Research, Minneapolis-Honeywell Regulator Co., Minneapolis, Minn.*

Heaviside's Electric Circuit Theory

BY H. J. JOSEPHS, *Senior Physicist, Post Office Engineering Department. Methuen & Co., Ltd., London; John Wiley & Sons, Inc., New York. Second Ed.*, 1950, 113 *pages*, $1.25.

IT IS a real problem to present substantially all of Heaviside's important basic contributions to electric circuit analysis in one small monograph of 113 pages. The author has accomplished this, however, by a concise and clear treatment of the various fundamental methods of operational analysis as worked out by Heaviside and extended by Carson, Bromwich, and others. Just enough historical background is included to convey something of the boldness and originality of Heaviside's approach to circuit problems. Emphasis on the physical interpretation of results through numerous practical examples helps the reader appreciate the power of operational methods.

What the author calls "Heaviside's Last Theorem", of which the Carson integral theorem is a corollary, is used as a basis for establishing rigorously the various operational processes. However, one might debate the author's statement that this theorem had apparently "escaped the notice of engineers", since it is clearly pointed out by Bush in his *Operational Circuit Analysis*, to mention one case.

The usefulness of this monograph would be increased by the inclusion of even a modestly short table of operational expressions in an appendix. As it is, they are scattered throughout the volume and are difficult to locate. Some mention of the relation between Heaviside's operational approach and the now more generally used

BROWN INSTRUMENTS ACCELERATE RESEARCH

For Precise and Sensitive Zeroing





The Simulator is a product of Reed Research, Inc., Washington, D.C.

...The *ElectroniK* Amplifier System

This rugged and reliable amplifier system is rapidly becoming the heart of a host of devices and apparatus requiring automatic zeroing or standardizing. Typical is its utilization on the *Simulator* made by Reed Research, Inc., an analog computer for analyzing transient heat flow. Here, the *ElectroniK* Amplifier electro-mechanically regulates grid bias to counteract any drift encountered in the measuring amplifiers. For a discussion of its application in your research or production program, call in your local Honeywell engineer . . . he is as near as your phone. MINNEAPOLIS-HONEYWELL REGULATOR CO., *Industrial Division*, 4428 Wayne Ave., Phila. 44, Pa. Offices in more than 80 principal cities of the United States, Canada and throughout the world.

MINNEAPOLIS **Honeywell**

BROWN INSTRUMENTS

DO YOU KNOW?

—that a **PILOT LIGHT**
CAN IMPROVE YOUR PRODUCT
. . . . add attraction — safety — service?

Ask **DIALCO**
— what lamp to use
— how to use it
— what it will do
— what it will cost

THIS MAY BE THE ONE
Designed for low cost NE-51 Neon

- Built-in Resistor
- Patented
- U/L Listed
- Rugged

Catalogue Number 521308 — 997
for 110 or 220 volts.

SAMPLES
for design purpose
NO CHARGE

NEW! Write for the "HANDBOOK OF PILOT LIGHTS."
Write us on your design problems.

The DIAL LIGHT COMPANY of AMERICA
Foremost Manufacturer of Pilot Lights.
900 BROADWAY, NEW YORK 3, N. Y. TELEPHONE SPRING 7-1300

Kenyon *Fits Your Production To A "T"*



Kenyon "T's"—high quality, uniform transformers, are your best bet for development, production and experimental work. For over 20 years, the KENYON "K" has been a sign of skillful engineering, progressive design and sound construction.

Now—reduce inventory problems, improve deliveries, maintain your quality—specify KENYON "T's," the finest transformer line for all high quality equipment applications.

New Catalog Edition! Write Today!

Kenyon new modified edition tells the complete story about specific ratings on all transformers. Our standard line saves you time and expense.

Send for your copy of our latest catalog edition *now!*

KENYON TRANSFORMER CO., Inc.
840 BARRY STREET · NEW YORK 59, N. Y.

put an added *Selling Factor* into your COIL WINDINGS



PRECISION BOBBINS

by

PERFORMANCE, PUBLICITY, Precision Quality

has the outstanding reputation for superior Coil Bases thruout the electrical field.

Some of the reasons:

Tubes spirally wound of finest dielectric materials for greatest strength—better heat dissipation—less moisture absorption—vulcanized fibre flanges—swaged tube ends for secure locking—entire assembly impregnated—perfect seal—meeting Underwriters' requirements.

Send today for samples to your specifications. Round, square, rectangular. LOW COST. Any quantity. Phone, wire or write.

PRECISION PAPER TUBE CO.

Also Precision Paper Tubes.
Ask for new Mandrel List. Over 1,000 sizes.
2041 W. Charleston St. Chicago 47, Ill.
Plant No. Two, 79 Chapel St. Hartford, Conn.

New Instruments for Microwave Testing

COMPLEMENT SPERRY'S *Microline*®

Models 348, 349 and 350, new cavity frequency meters shown below, extend to the SHF and EHF frequency ranges, techniques which are now available at lower frequencies. These broadband instruments are designed for both transmission and absorption-type indications. They are suitable for search-type frequency measurements or any other requirement where an accuracy of .1 percent frequency set is needed. These are among the many new microwave test and measuring instruments which have been added to the ever-increasing Sperry Microline.

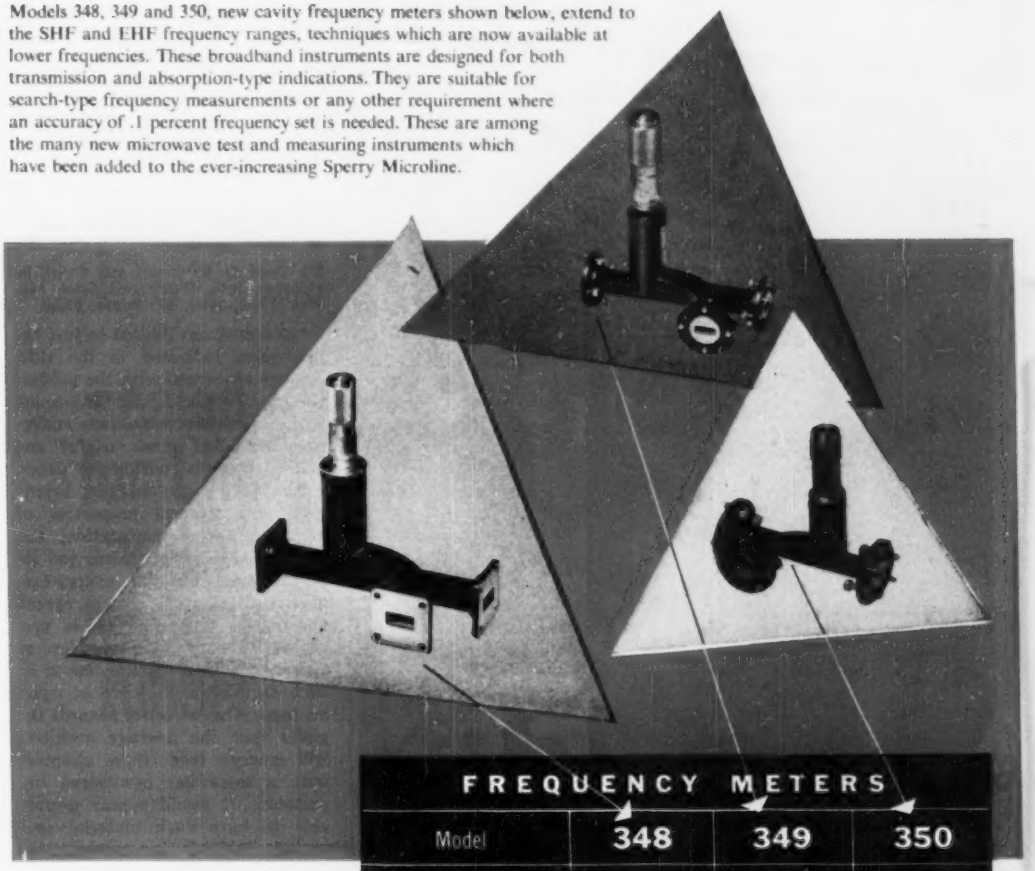

FREQUENCY METERS			
Model	348	349	350
Description	CAVITY	CAVITY	CAVITY
Frequency Range mc	13,000-18,000	19,000-26,000	26,500-39,000
Absolute Accuracy	1 1000	1 1000	1 1000
Approximate Loaded Q	1000	450	1000
Fittings) R-F	UG 419 U	UG 425 U	UG 381 U
) Video	UG 419 U	UHF	UG 381 U

Other new instruments in the frequency ranges of the above mentioned meters are:

Instrument	Model	Frequency Range mc
Impedance Meter	320	18,000-26,500
Impedance Meter	346	26,500-40,000
Impedance Transformer	347	26,500-40,000
Directional Coupler	405	26,500-39,000
Directional Coupler	413	18,000-26,500
Directional Coupler	415	18,000-26,500
Directional Coupler	388	12,400-17,000
Directional Coupler	429	32,000-39,000
Short	371	26,500-40,000
Short	372	12,400-18,000
Termination	401	12,400-18,000
Termination	402	26,500-40,000
Detector and Mixer	357	12,400-18,000
Detector and Mixer	358	18,000-26,500
Detector and Mixer	359	26,500-40,000
Detector and Mixer	382	26,500-40,000
Magic Tee	390	18,000-26,500
Magic Tee	391	26,500-40,000

Catalog information on these and other Microline instruments is available on request.

*Trade Mark

SPERRY GYROSCOPE COMPANY

DIVISION OF THE SPERRY CORPORATION, GREAT NECK, NEW YORK • CLEVELAND • NEW ORLEANS • NEW YORK • LOS ANGELES • SAN FRANCISCO • SEATTLE

Ballantine PEAK to PEAK Electronic VOLTMETER

Designed for PULSE AMPLITUDE MEASUREMENTS

MODEL 305—Price $280.

The outstanding characteristic of the Model 305 Electronic Voltmeter is its ability to accurately measure the peak to peak magnitude of repetitive pulses of such short duration and low energy content as to be unreadable on the ordinary electronic voltmeter. It will measure with an accuracy of better than 5% pulses as short as 3 microseconds with a repetition rate as low as 20 per second. Like all other Ballantine voltmeters, the Model 305 is pre-calibrated, stable, compact and easy to read.

For complete information on this Electronic Voltmeter and the Ballantine Model 300 Electronic Voltmeter, Battery Operated Electronic Voltmeters, Wide-Band Electronic Voltmeters, and accessories such as Decade Amplifiers, Multipliers, and Precision Shunt Resistors, write for catalog.

BALLANTINE LABORATORIES, INC.

100 FANNY ROAD, BOONTON, N. J.

LaPlace transform methods would be desirable, but this perhaps is expecting too much for such a short monograph. This little volume should be useful for students or engineers with some background in basic mathematics and circuit theory, and for those desiring a concise exposition of Heaviside's methods.—J. GREGG STEPHENSON, *Airborne Instruments Laboratory, Mineola, N. Y.*

Acoustical Designing in Architecture

BY VERN O. KNUDSEN AND CYRIL M. HARRIS. *John Wiley and Sons, Inc., New York*, 1950, 457 *pages*, $7.50.

OF INTEREST not limited to just the profession indicated in the title. Anyone concerned with the production or reproduction of sound within natural or man-made enclosures will find much useful and helpful material within its pages.

The first three chapters briefly cover the general properties of sound and its propagation, the human hearing mechanism and its performance, and the energy-frequency distribution of noise, speech and music. The material is presented in what has become more or less the classical manner, based on such factors as contours of equal loudness. This reviewer hazards the guess that the average architect will emerge from these chapters with a somewhat bewildered impression. It would appear preferable to have such material presented instead in transmission characteristic form, showing for instance the fidelity or frequency response of the ear in decibels of relative loudness for constant input at various fixed sound intensity levels. This would allow direct comparison with the frequency characteristics of other elements in an overall sound system as usually presented in graph form.

After a chapter on the reflection and diffraction of sound waves by the surfaces normally encountered in rooms, the design of open-air theatres and stages is treated. The following two chapters on sound-absorptive materials and types of construction are of importance to anyone interested in modifying the acoustics of an enclosure, whether loudspeaker cabinet, living room or

Capacitors

sealed for Life with silicone rubber

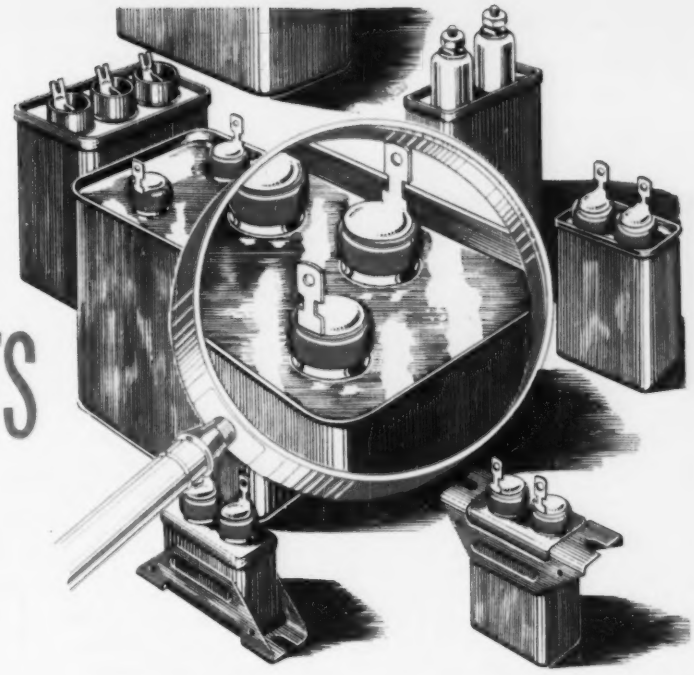

SILICONE—the amazing new synthetic that made headlines when General Electric brought it out—is back in the news again. For today, G-E small capacitors, up through 5000 volts, are hermetically sealed with silicone rubber bushings or gaskets.

This means that your new G-E capacitor is sealed positively, permanently—for maximum life. For silicone seals by compression alone, without the use of adhesives. It will never shrink, loosen or pull away—it remains elastic at any operating temperature a capacitor will ever meet. It is impervious to oils, alkalies and acids. Its dielectric strength is permanently high and it is not easily damaged during installation for it has a flexibility that withstands mechanical and thermal shock.

This exclusive G-E feature—designed to surpass established installation requirements—makes General Electric capacitors finer and more dependable than ever before. *Apparatus Dept., General Electric Company, Schenectady 5, N. Y.*

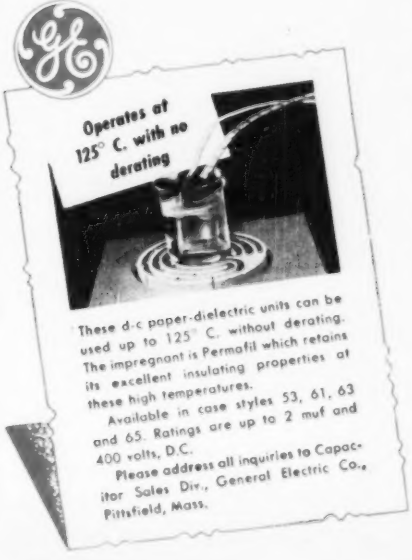

These d-c paper-dielectric units can be used up to 125° C. without derating. The impregnant is Permafil which retains its excellent insulating properties at these high temperatures.

Available in case styles 53, 61, 63 and 65. Ratings are up to 2 muf and 400 volts, D.C.

Please address all inquiries to Capacitor Sales Div., General Electric Co., Pittsfield, Mass.

Silicone-rubber bushings, permanently elastic and formed to close tolerances, seal themselves by compression to the capacitor cover. They are used with capacitors 1500-v d-c, or 660-v a-c, and lower. Silicone rubber gaskets with plastic or porcelain stand-offs are used for higher voltages.

GENERAL ELECTRIC

4D7-172

Manufacturer's tests confirm superiority of PALINEY* #7 for brushes on new Rectilinear Potentiometer . . .



"Our experience has confirmed your tests and those of the Radiation Laboratory regarding brush wear. Less than a week ago we completed a life test on one of our 2" Rectilinear Potentiometers in which the brush traveled the full length of the resistance element five million times before failure occurred. The wire used in the resistance element was .0014 diameter."

PALINEY* #7 . . . a precious metal alloy containing gold, platinum and palladium . . . is giving outstanding service as the sliding contact in many types of potentiometers where long life, low noise and maintained linearity are essential. This and other Tested NEY Precious Metal Alloys are also being used successfully in numerous precision contact and slip ring applications requiring controlled wear resistance, high conductivity and freedom from tarnish and corrosion. Write or call our Research Department for additional technical data, outlining your problem if possible.

THE J. M. NEY COMPANY 179 ELM ST., HARTFORD, CONN.

SPECIALISTS IN PRECIOUS METAL METALLURGY SINCE 1812

* *Reg. T.M. J. M. Ney Co.*

G. M. GIANNINI & CO., INC.
697 Morris Turnpike
Springfield, New Jersey

New Type 2A TAP SWITCHES

HAVE A CONSTANT CONTACT RESISTANCE OF

ONLY 1 or 2 MILLIOHMS!

These high quality switches with up to 24 contacts were specifically developed to meet the need for rugged precision instrument switches that have longer operating life and are economical components in competitively priced electronic instruments and military equipment.

●

Write for Technical Bulletin No. 28.

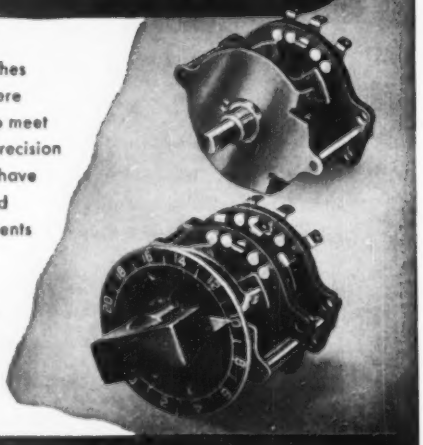

TECH LABORATORIES PALISADES PARK NEW JERSEY

PHYSICISTS

And

SENIOR RESEARCH ENGINEERS

• • •

POSITIONS NOW OPEN

• • •

Senior Engineers and Physicists having outstanding academic background and experience in the fields of:

- Microwave Techniques
- Moving Target Indication
- Servomechanisms
- Applied Physics
- Gyroscopic Equipment
- Optical Equipment
- Computers
- Pulse Techniques
- Radar
- Fire Control
- Circuit Analysis
- Autopilot Design
- Applied Mathematics
- Electronic Subminiaturization
- Instrument Design
- Automatic Production Equipment
- Test Equipment
- Electronic Design
- Flight Test Instrumentation

are offered excellent working conditions and opportunities for advancement in our Aerophysics Laboratory. Salaries are commensurate with ability, experience and background. Send information as to age, education, experience and work preference to:

NORTH AMERICAN AVIATION, INC.

Aerophysics Laboratory

Box No. K-4, 12214 S. Lakewood Blvd.

DOWNEY, CALIFORNIA

"R" Monel solved this problem

Can it solve one for YOU?

When the Luma Electric Equipment Company designed their new resistance soldering tool, they ran into a problem . . .

The electrode holders, subject to high heat from the carbon electrodes, were giving unsatisfactory service in experimental models. Luma engineers tried various alloys for the holders, but were forced to discard one after the other because of early failure or lack of good machining characteristics.

The metal they needed had to have these qualities . . . *all* of them:

1. *High strength, even when the carbon electrodes become red hot.*
2. *Good resistance to oxidation and corrosion.*
3. *Low co-efficient of expansion.*
4. *Good machinability.*
5. *At least fair electrical conductivity.*

Luma finally found what they were seeking in "R"® Monel, one of the family of INCO high-nickel alloys. Electrode holders made of "R" Monel successfully withstood the severe service conditions imposed by the fast-heating Luma Soldering Tool.



The Luma Soldering Tool, operating on the resistance principle, gives quick heat as soon as the transformer current is applied to the electrodes. The total weight of the handpiece is amazingly small — only 8 ounces, including a 5-foot, twin conductor cable. Electrodes are carbon. For maximum service, electrode holders are heat-resistant, corrosion-resistant "R" Monel.

For information about the Luma Soldering Tool, write directly to LUMA ELECTRIC EQUIPMENT CO., P. O. Box 132, Toledo 1, Ohio.

And in addition, "R" Monel proved to be a *practical* metal . . . economical, machinable. "R" Monel is particularly well-adapted for use on automatic screw machines, since it may be machined at relatively high cutting speeds.

If—like the Luma Electric Equipment Company—you have a high-temperature or corrosion problem that seems impossible to solve, you'll find INCO's Technical Service Department always ready to help you. A letter, briefly outlining your problem, will secure INCO's full co-operation.

EMBLEM OF SERVICE

NICKEL (INCO) ALLOYS

THE INTERNATIONAL NICKEL COMPANY, INC.

67 Wall Street, New York 5, N. Y.

MONEL® • "K"® MONEL • "R"® MONEL • "KR"® MONEL
NICKEL • "D"® NICKEL • "L"® NICKEL • INCONEL®
DURANICKEL® • PERMANICKEL® • INCONEL "X"®.

MILO

has *all* the best lines for industry and research!

AEROVOX • AMPHENOL • BUD
BURGESS • CINCH-JONES
CORNELL DUBILIER
ALLEN B. DUMONT • ERIE
FEDERAL TELEPHONE & RADIO
GENERAL ELECTRIC • HAMMARLUND
HICKOK • IRC • JAMES MILLEN
KINGS ELECTRONICS
NATIONAL COMPANY
SIMPSON ELECTRIC
STANDARD TRANSFORMER
SUPERIOR ELECTRIC
SYLVANIA
ETC.

Take a gander at just a few of the latest products you want—

available now from Milo's great warehouse of complete stocks:

CINCH-JONES*—New "300" series plugs and sockets in deep bracket mountings. New "164" barrier strips.

CONTINENTAL CARBON*—Nobeloy precision resistors, ideal for meter work and other industrial applications.

ALLEN B. DUMONT LABORATORIES—New oscilloscopes, superseding the famous 208B. Type 304, $308.00 each. Type 304H, $328.00 each.

FEDERAL TELEPHONE & RADIO*—All types miniature and packaged power rectifiers, and RGU cables.

IRC*—New type DCH and DCF precision resistors. BTS, BTA, BT2 and BW resistors, in all tolerances and values. New CLA and CL-1 insulated chokes, readily identified with RMA color coding in mircohenries.

SUPERIOR ELECTRIC*—Powerstat variable transformers and automatic voltage regulators for every requirement.

SYLVANIA*—All types of germanium crystals, new glow modulators, gas pressure tubes, TR and ATR tubes, strobotrons, thyratrons, flash tubes.

ALLEN BRADLEY*—Potentiometers, and EB, GB, HB resistors in all tolerances and values.

*Prices and literature on these products available upon written request on your letterhead.

STREAMLINED one-source purchasing through MILO

saves you money, time and effort!

Only Milo gives you ALL these exclusive buying advantages:

★ COMPLETE NEWEST STOCKS OF ALL THE BEST MANUFACTURERS
★ FACTORY PRICES
★ SAME-DAY SHIPMENT
★ LATEST TECHNICAL KNOW-HOW AND KNOW-WHAT
★ PERSONAL ATTENTION AND ADVICE

To get it right, to get it fast, to get it at the factory price—Call Milo's INDUSTRIAL SALES DIVISION today. Ask for Mr. Lee. Or write on your letterhead for free latest Catalog E.

MILO Radio & Electronics Corp.
200 Greenwich Street, New York 7, N. Y.
PHONE BEekman 3-2980
Cable Address: MILOLECTRO
The ONE source for ALL your electronic needs

a theatre. The phenomena resulting from resonances in the cavity or group of cavities which constitute a room is then considered; this chapter naturally leads to one on the control of room resonance, reverberation and propagation paths to provide desired characteristics.

Noise or undesired sound will invade the enclosures in which people live, work and relax through many, often minor, paths. Four chapters treat noise control, presenting the necessary structural devices and precautions which optimize acoustic signal-to-noise ratio within a room through noise reduction. When noise cannot be further reduced, obviously only an increase in signal level can improve the signal-to-noise ratio. A chapter is devoted to a consideration of the role of electrical amplification in reinforcing speech and music, by both monaural and stereophonic means.

The book concludes with six chapters which are more specifically concerned with definite design problems than is the preceding material. These cover auditoriums, theatres, school classrooms, lecture rooms, music rooms, commercial and public buildings such as restaurants and hospitals, homes and apartments, churches, and radio, television and recording studios. Three appendices are provided, including comprehensive tables of sound absorption coefficients of materials and sound insulation data for various types of partitions and structures, plus a brief table of conversion factors and physical constants.

There are many charts and graphs scattered through the text which summarize much useful acoustical information. It is perhaps to be regretted that a few additional words were not included in explanation of some items as, for instance, the chart for summation of two noise levels (Fig. 10.1) where the text does not make clear that the resultant is simply the sum of the sound energy or power of the two noises.

This reviewer cordially recommends the book as a welcome addition to the literature of engineering acoustics, as well as for its great potential usefulness to the architect, who, in turn, can benefit us all.

The opinions and assertions con-

YOU CAN BE **SURE**.. IF IT'S
Westinghouse

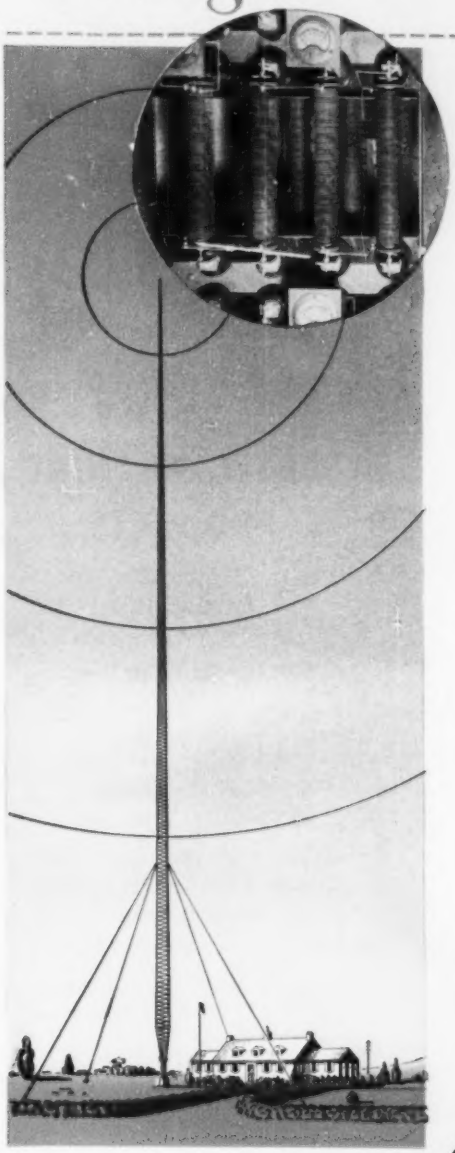

No Program Interruptions

How KDKA MAKES SURE with Selenium Rectifiers

You, too, can have a power rectifier that is good for the *life* of your transmitter. Gone forever will be those costly program interruptions caused by the sudden necessity of replacing power tubes.

Since Selenium stacks were installed at KDKA, power rectifiers are no longer critical components. In addition to many years of service, these Selenium rectifiers provide other benefits. No warm-up period or filament power required . . . ability to withstand relatively high inverse surges . . . takes temporary or prolonged overloads without damage.

Why not be assured of stable operation of your power rectifier . . . of program continuity at full signal strength. Your nearby Westinghouse representative will tell you how to get the job-proved Rectox. Ask him for a copy of DB-19-025 or write Westinghouse Electric Corporation, Post Office Box 868, Pittsburgh 30, Pa. J-21568

WESTINGHOUSE

Westinghouse
Rectox
Rectifiers & Chargers for
ALL INDUSTRIES

A NEW SOLUTION TO OLD PROBLEMS

AEROCOM'S NEW ARTIFICIAL ANTENNA, SIMULATING ACTUAL OPERATING CONDITIONS, SAVES TIME ON TRANSMITTER AND RECEIVER TUNING

It is no longer necessary to final tune transmitters or receivers aboard aircraft. With the new Artificial Antenna (Model DA200) you can precisely simulate, electrically, any normal aircraft antenna. All this without leaving the test bench. This equipment will accept any transmitter power up to 200 watts – coaxial fitting provides direct 52 ohm metered load. Sturdily constructed for hard usage, can be mounted in standard rack cabinet or used on bench top.

A letter or wire from you will bring descriptive literature

CONSULTANTS, DESIGNERS AND MANUFACTURERS OF STANDARD OR SPECIAL ELECTRONIC, METEOROLOGICAL AND COMMUNICATIONS EQUIPMENT

AER-O-COM

AERONAUTICAL COMMUNICATIONS EQUIPMENT, INC.

1050 Dauglas Road Miami 34 Florida

New! Revolutionary!

Superspeed

WHITE FLASH

Activated ROSIN CORED SOLDER

SAVES TIME AND COSTS

SCIENTIFICALLY DESIGNED to meet Modern Production Methods in the fields of

Radio • Television • Telephone • Telecommunications • Railroad Signalling • Automotive Industries Can Manufacturing • Machinery • General Electrical Work Aeronautics and many others.

SAFE! SPEEDY!! EFFICIENT!!!

THE FLUTED CORE

—stellate in section—contains a fluxing medium of unrivaled efficiency close to periphery of the solder at six points. It permits instantaneous "wetting" and fluxing at correct temperature, and obviates dry and high resistance joints.

SUPERSPEED WHITE FLASH Activated Rosin Cored Solder comes in different diameters and alloys—YOU CAN SELECT THE SOLDER TO GIVE MAXIMUM EFFICIENCY AT THE CORRECT TEMPERATURE—FOR YOUR JOB—or—we make it to fit your requirements.

Check these Important Features:

- ★ Activated rosin flux insures maximum "wetting" and spreading.
- ★ No dry or high resistance joints. No risk of corrosion.
- ★ Economical. Goes further. Gives more joints per pound of solder.
- ★ Faster. Operators solder more joints.
- ★ Cuts down rejects.
- ★ Non-hygroscopic residue of high dielectric strength.
- ★ No unpleasant odor.
- ★ Complete continuous core.

Write to our U. S. Representative for samples, technical literature, and prices. Stocks maintained in Rochester for immediate delivery to all points.

Non-Exclusive Sales Agent: H. J. ENTHOVEN & SONS LTD. LONDON, ENGLAND

U. S. Representative: MAURICE H. ESSER Dept. A, 113 N. WATER STREET ROCHESTER 4, NEW YORK

STEINEN Offers

A Complete metal service right at your fingertips



SCREW MACHINE PRODUCTS

Housings
Assemblies
Metal Trimmings
Electronic Tube Parts

•

STAMPINGS

Metal • Fibre
Phenolite • Plastic

•

Complete Fabrication Facilities Under One Roof

B. & S. Automatic Screw Machines • 6-Spindle Automatic Screw Machines • Semi-Automatic Millers, Drill Presses, Tappers • High-Speed Power Presses • Semi-Automatic and Automatic Assemblies.

Exacting Specifications Met—Rigid Inspection System

WE INVITE YOUR INQUIRY

WM. STEINEN MFG. CO.

Bruen Cor. Hamilton St., Newark 5, N. J.

QUALITY STEINEN PRODUCTS

ELECTRONIC ENGINEERS *Specify* GUARDIAN

HERMETICALLY SEALED RELAYS

NEAT
EFFICIENT
EASY-TO-SERVICE
VIBRATION-PROOF

SERIES 335 RELAY

SERIES 595 RELAY


SERIES 610 AC—615 DC RELAY


THE SCREW TERMINAL TYPE


THE A. N. CONNECTOR TYPE


THE OCTAL PLUG TYPE


THE LUG HEADER TYPE

Valuable information on HERMETICALLY SEALED Guardian Relays is yours for the asking. Write on your business letterhead for new completely descriptive and illustrated Catalog 5-H. No cost. No obligation.

TV FOCUS COILS

GUARDIAN FOCUS COILS

Over a million Focus Coils have rolled off Guardian's production lines into TV sets of leading manufacturers. With more than 75 types established as *Guardian Standard*, speedy delivery to meet today's replacement needs is a matter of routine.

Write— ASK US TO MAKE SPECIFIC RECOMMENDATIONS. NO OBLIGATION.

GUARDIAN ELECTRIC

1625-M W. WALNUT STREET CHICAGO 12, ILLINOIS

A COMPLETE LINE OF RELAYS SERVING AMERICAN INDUSTRY

MOSINEE PAPER MILLS CO.
MOSINEE, WISCONSIN

MOSINEE

"More than Paper"

In the field of electronics and the electrical goods industry, MOSINEE stands for paper-base processing materials with scientifically controlled chemical and physical properties, high quality standards and dependable uniformity... with good dielectric strength, high tensile or tear strength; proper softness or stiffness; creped with controlled stretch or flexibility; specified pH for maximum-minimum acidity or alkalinity; accurate caliper, density, liquid repellency or absorbency . . . or other technical characteristics vital to your quality standards and production requirements.

MOSINEE PAPER MILLS COMPANY • MOSINEE, WIS.

"Essential Paper Manufacturers"

tained in this review are those of the undersigned reviewer and are not to be construed as official or necessarily reflecting the views of the Department of the Navy.—EMERICK TOTH, *Radio Techniques Branch, Radio Division II, Naval Research Laboratory, Washington, D. C.*

THUMBNAIL REVIEWS

JOSEPH HENRY. By Thomas Coulson. Princeton University Press, Princeton, N. J., 1950, 352 pages, $5.00. Complete critical account of Henry's life and his contributions to science.

INPUT IMPEDANCE OF A SLOTTED CYLINDER ANTENNA. Engineering Experiment Station Circular Series No. 59, March 1950, University of Illinois, Urbana, 50 pages, 40 cents. Properties of antenna, derivation of transmission line equations, and mathematical procedure for calculating performance.

A.S.T.M. STANDARDS ON ELECTRICAL INSULATING MATERIALS, 1950 Edition. American Society for Testing Materials, 1916 Race St., Philadelphia, 679 pages, $4.85. Contains all of the standard and tentative test methods and specifications pertaining to insulating materials, many of which have been recently revised.

A BIBLIOGRAPHY IN AUDITION. Volume I—A-M; Volume II—N-Z. Mimeographed. Distributed by Harvard University Press, Cambridge 38, Mass., $3.00. Comprehensive bibliography (each volume is almost one inch thick, on 8½ by 11 sheets) prepared by Psycho-Acoustic Laboratory of Harvard under ONR contract. References are arranged alphabetically by author, and keyed to a separate classification by subject so that authors for any desired aspect of audition are easily located. Major classifications are anatomical, physiological, psychological, deafness, and auditory theory.

PROCEEDINGS OF THE NATIONAL ELECTRONICS CONFERENCE, Vol. V (1949). National Electronics Conference, 852 E. 83rd St., Chicago, Ill., 202 pages, $6.00. Includes in permanent cloth-bound form, with few exceptions, all of the papers presented at the Sept. 26-28, 1949 conference, along with tables of contents of previous issues of the proceedings. Still available is Vol. 2 (1946) at $3.50 and Vol. 3 (1947) and 4 (1948) at $4.00 each.

ELECTROMAGNETIC WAVES. By F. W. G. White. John Wiley & Sons, New York, 1950. Fourth Edition, 108 pages, $1.25. Part of Methuen's Monograph series. Despite occasional typographical errors and some over zealous condensation, the book contains a fairly complete outline of the theories of Maxwell and Lorentz and of radio waves in the upper atmosphere.

THE EFFECTS OF ATOMIC WEAPONS. Prepared for and in cooperation with the U. S. Atomic Energy Commission and Department of Defense under the direction of the Los Alamos Scientific Laboratory. McGraw-Hill Book Co., New York, 1950, 456 pages, $3.00. Summary of what is known today about effects of atomic explosions, with graphs and data on air blast damage, ground and underwater shock, thermal radiation, initial nuclear radiation and residual radiation at varying distances from ground zero. Chapters cover measurement of nuclear radiations, decontamination, effects on personnel and protection of personnel. Appendices cover computation of deformation of structures by blast waves, calculation of hazard from world-wide contamination, and Rossegen measurements.

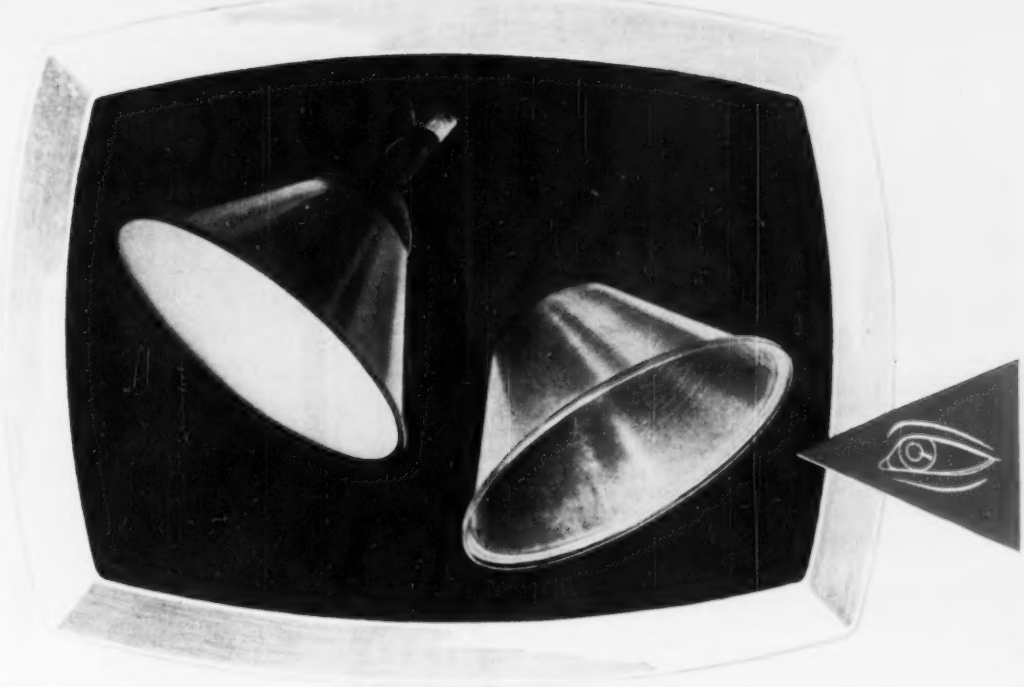

U·S·S Stainless Steel is in the television picture

PICTURE TUBE CONES OF U·S·S 17-TV REDUCE WEIGHT, HELP CUT COSTS

PUBLIC demand for bigger and better television at low price has brought manufacturers face to face with new problems in reducing weight and holding down set cost. And, like so many other industries, television has turned to Stainless Steel to solve this problem.

A new grade of U·S·S Stainless Steel, known as U·S·S 17-TV, has been developed especially for this television application. Having an appropriate coefficient of expansion, it permits fusing of the faceplate and neck to the metal cone with a strong air-tight seal.

By using U·S·S 17-TV instead of glass for the conical section of the picture tube, you can cut the weight of this key part over one-third. The result is important savings in handling, shipping and packing costs. The tube can be shipped installed in the receiver with little danger of damage in transit.

In addition to its light weight, other inherent advantages of Stainless make important contributions here. Its strength enables the tube to withstand extreme pressures and reduces breakage hazards. Because glass area is held to a minimum, and because of the protection provided by the Stainless Steel cone, hazards of implosion are minimized—in tube manufacture, in installation and in service. The U·S·S 17-TV cone permits the use of a flawless, smooth glass face, thus resulting in cleaner, and sharper pictures.

Whether you manufacture or use cathode ray tubes, investigate the possibilities of U·S·S 17-TV Stainless Steel, developed especially for the television industry. Like all other grades of U·S·S Stainless, it is made to give you the finest possible performance.

AMERICAN STEEL & WIRE COMPANY, CLEVELAND · CARNEGIE-ILLINOIS STEEL CORPORATION, PITTSBURGH
COLUMBIA STEEL COMPANY, SAN FRANCISCO · NATIONAL TUBE COMPANY, PITTSBURGH · TENNESSEE COAL, IRON & RAILROAD COMPANY, BIRMINGHAM
UNITED STATES STEEL SUPPLY COMPANY, WAREHOUSE DISTRIBUTORS, COAST-TO-COAST · UNITED STATES STEEL EXPORT COMPANY, NEW YORK

USS

U·S·S STAINLESS STEEL

SHEETS · STRIP · PLATES · BARS · BILLETS · PIPE · TUBES · WIRE · SPECIAL SECTIONS

UNITED STATES STEEL

Engineers who "talk test"...
pick **PEERLESS**

The transformer proved definitely superior in the competitive...
SQUARE WAVE TEST



Claims and counterclaims of quality are easy to make... but to the engineer, **tests really talk.** And indisputable evidence of Peerless Transformer superiority is found in the **Square Wave Test**... which reveals the slightest flaw in design and performance. Tests conducted by impartial engineers prove Peerless components have better power characteristics, flatter response curves, less intermodulation distortion and lower insertion losses. Send for the complete Peerless Catalog... giving full details on transformers that are really "best by test."

PEERLESS Electrical Products Division

1161 N. VINE ST., HOLLYWOOD 38, CALIF.
161 SIXTH AVE., NEW YORK 13, NEW YORK

ALTEC LANSING CORPORATION

Permanent Magnet Problems Can Be Simple... If You Have:

- √ Quality Magnets
- √ Prompt Delivery
- √ Complete Engineering Service
- √ Low Unit Cost

For 49 years Thomas & Skinner has geared its facilities to provide the answer to all permanent magnet problems.

Why not let Thomas & Skinner engineers work with you in the design and production of the *right* permanent magnet for your application? Write or call us today.

THOMAS & SKINNER — *Specialists in magnetics: permanent magnets and laminated cores*

THOMAS & SKINNER Steel Products Company
1120 East 23rd Street · Indianapolis, Indiana

BUILDERS OF COMMUNICATIONS EQUIPMENT, MEASURING INSTRUMENTS FOR COMMERCIAL AND INDUSTRIAL USE, AND OTHER ELECTRONIC DEVICES — PRODUCTS WHERE PRECISION PERFORMANCE LARGELY DEPENDS UPON *TIME AS A FACTOR OF CONTROL* — KNOW THEY

can rely on

Cramer
DESIGN
QUALITY
ACCURACY



RUNNING TIME METERS
Synchronous motor driven. Register automatically and cumulatively total operating or idle time on circuits, machines, systems.

TIME DELAY RELAYS
Provide adjustable or fixed time delay between operation of a control circuit and subsequent opening or closing of a load circuit.

SYNCHRONOUS MOTORS
Permanent magnet type for applications requiring a constant speed at a given frequency. Small size. 30° ounce torque. Twenty-eight speeds from 60 rpm to 1/24 rph.

For a wide range of standard timers and controls... or special adaptations for specific applications...consult **R. W. CRAMER CO.**, Box No. 3, Centerbrook, Conn.

Cramer
SPECIALISTS IN *TIME* AS A FACTOR OF *CONTROL*
INTERVAL · DELAY · CYCLE · IMPULSE

STANDARD RI-FI* METERS

14kc to 1000mc!

DEVELOPED BY **STODDART** FOR THE ARMED FORCES.

AVAILABLE COMMERCIALLY.

VHF!
15 MC to 400 MC
NMA - 5

Commercial equivalent of TS-587/U.
Sensitivity as two-terminal voltmeter, (95 ohms balanced) 2 microvolts 15-125 MC; 5 microvolts 88-400 MC. Field intensity measurements using calibrated dipole. Frequency range includes FM and TV Bands.

VLF!
14 KC to 250 KC
NM - 10A



Commercial equivalent of AN/URM-6.
A new achievement in sensitivity! Field intensity measurements, 1 microvolt-per-meter using rod; 10 microvolts-per-meter using shielded directive loop. As two-terminal voltmeter, 1 microvolt.

HF!
150 KC to 25 MC
NM - 20A

Commercial equivalent of AN/PRM-1.
Self-contained batteries. A.C. supply optional. Sensitivity as two-terminal voltmeter, 1 microvolt. Field intensity with ½ meter rod antenna, 2 microvolts-per-meter; rotatable loop supplied. Includes standard broadcast band, radio range, WWV, and communications frequencies.

UHF!
375 MC to 1000 MC
NM - 50A

Commercial equivalent of AN/URM-17.
Sensitivity as two-terminal voltmeter, (50-ohm coaxial input) 10 microvolts. Field intensity measurements using calibrated dipole. Frequency range includes Citizens Band and UHF color TV Band.

Since 1944 **Stoddart RI-FI*** instruments have established the standard for superior quality and unexcelled performance. These instruments fully comply with test equipment requirements of such radio interference specifications as JAN-I-225, ASA C63.2, 16E4(SHIPS), AN-I-24a, AN-I-42, AN-I-27a, AN-I-40 and others. Many of these specifications were written or revised to the standards of performance demonstrated in **Stoddart** equipment.

The **rugged** and **reliable** instruments illustrated above serve equally well in field or laboratory. Individually calibrated for consistent results using internal standard of reference. Meter scales marked in microvolts and DB above one microvolt. Function selector enables measurement of sinusoidal or complex waveforms, giving average, peak or quasi-peak values. Accessories provide means for measuring either conducted or radiated r.f. voltages. Graphic recorder available.

***Radio Interference and Field Intensity.**

Precision Attenuation for UHF!
Less than 1.2 VSWR to 3000 MC.
Turret Attenuator:
0, 10, 20, 30, 40, 50 DB.
Accuracy ± .5 DB.
Patents applied for.

STODDART AIRCRAFT RADIO CO.

6644 SANTA MONICA BLVD., HOLLYWOOD 38, CALIF.
Hillside 9294

Glaser LECTRON ROSIN CORE SOLDER

Speeds Soldering Operations on the Production Line

Many manufacturers in the radio, electronic, and television industries do not gaze into a crystal ball to discover why their soldering operations show a 15% increase in speed. They know, GLASER LECTRON ROSIN CORE SOLDER, made with an exclusive activated rosin flux, is the reason for this speed-up in production.

GLASER LECTRON ROSIN CORE SOLDER bonds copper and brass perfectly and permanently—yet is non-corrosive and non-conductive. Superior to any other activated rosin core solder made.

Profit from the experience of the many economy minded manufacturers. Speed up work on your production line—insist on a proven leader, GLASER LECTRON ROSIN CORE SOLDER.

The Quality Line

GLASER PLASTIC ROSIN CORE SOLDER has gained a well deserved leadership in the industry because of its highest standard of quality. Both GLASER LECTRON ROSIN CORE and GLASER PLASTIC ROSIN CORE SOLDERS are made of the purest virgin tin, lead and perfect flux and are available in any tin-lead alloy and wire gauge.

OTHER GLASER PRODUCTS

Glaser Solder Preforms, Glaser Bar, Ingot or Solid Wire Solder. Glaser Fluxes for every purpose.

Our Engineering Department will gladly assist you with any soldering or flux problem, without obligation.

GLASER LEAD CO. INC.

21-31 WYCKOFF AVENUE BROOKLYN 27, N. Y.

RENDERING DEPENDABLE SERVICE TO AMERICAN INDUSTRIES SINCE 1922

TUBES AT WORK

(Continued on p 122)

servations by telephone to the operating personnel in the control room on the floor below. The numerous disadvantages of such a method are apparent and the system was soon abandoned and replaced by a television installation.

Two television cameras were placed on the observation deck and the required information was transmitted to the control room where it could be observed directly by the engineers in charge of tunnel operation and the engineers responsible for proper functioning of the ram jet. Rapid and precise setting of test conditions was possible which resulted in more rapid testing and the saving of expensive wind-tunnel testing time.

Rocket Research

The NACA Lewis Rocket Laboratory has also made use of this new medium. A great deal of research is concerned with new and, as yet, untried compounds for use as propellants. Many of the fuels and oxidants exhibit poisonous, corrosive or explosive characteristics. They may be difficult to handle by themselves and, when they combine within the rocket engine, it is not always possible to predict the result. The Rocket Laboratory has a special test cell for hazardous experiments remotely located from the principle installations. This cell is equipped with television allowing personnel in the remote control room to view the rocket in operation. The cost and availability of many of these compounds and the hazards involved make it expedient to limit both the duration and number of test runs. The use of television has contributed greatly in regard to these aspects of rocket testing.

At a recent technical symposium, it was necessary to exhibit some interferometer images from a test installation located in a small test cell over a quarter-mile from the auditorium. The limited size of the test cell, its location in reference to the auditorium and several other factors made it impossible for the assembled group to view directly the images on the interferometer. Coaxial cable was installed, a television camera set up in the test cell and a kinescope viewer placed

FOR ARMED SERVICES COMPONENT REQUIREMENTS — 1N69 AND 1N70

MEET JAN SPECS

SPECIFICATIONS

Max Ratings at 25°C	1N69	1N70
Peak Inverse Voltage	75	125
Max Continuous Inverse Voltage	60	100
Average Rectified Current (ma)	40	30
Peak Rectified Current (ma)	125	90
Surge Current (ma)	400	250
Temp. Range °C	−55 to +70	−55 to +70
Characteristics at 25°C		
Max Inverse Current at −50v(ma)	.85	.41
Max Inverse Current at −10v(ma)	.05	.01
Min Forward Current at +1v(ma)	5.0	2.0
Average Shunt Capacitance (mmfd)	0.8	0.8

Welded GERMANIUM DIODES

GENERAL ELECTRIC germanium diodes must meet the most rigid specifications, yet volume production continues to drive their prices steadily downward. Compare new G-E prices with all others . . . then check the following reasons for this ever-widening acceptance among electronics designers, engineers, and equipment makers:

Dual Mounting—For Convenience—Versatile G-E diodes can be mounted two ways: *clip them into place* by means of their husky, non-oxidizing nickel pin terminals . . . or use each diode's well-tinned, copper-clad steel leads to *solder* it into the circuit. These special leads are strong and flexible, conduct less heat than ordinary types, and thus prevent damage during soldering.

Platinum Whisker—For Strength—To assure stability and long life, the G-E diode's pigtail whisker is of platinum, which, unlike tungsten, can be strongly welded to germanium.

Moisture Resistant Insulating Case—For Protection—A special insulating case of molded, mineral-filled phenolic protects this unique welded contact. The case is also tapered to assure correct polarity mounting. These diodes are so easy to handle—you can install 'em in the dark!

Looking For A Long Life Diode? We've got 'em! The complete G-E line includes four general purpose diodes, two JAN types, two TV types (more than half a million of these have already been supplied to TV receiver manufacturers), one u-h-f model and the high quality quad of four balanced diodes. For product and application engineering service, inquire at the G-E electronics office near you, or write: *General Electric Company, Electronics Park, Syracuse, N. Y.*

NEW DIODE HANDBOOK

Now in 2nd Printing! Here are 68 pages of facts on characteristics, advantages, and circuitry of diodes. Charts, curves, diagrams, typical applications. Leatherette bound, loose-leaf style. Supplementary sheets furnished free as published. Worth many times its modest price of $1.25. Send check or money order to: *General Electric Company, Section 4110 Electronics Park, Syracuse, New York.*

You can put your confidence in—

GENERAL ELECTRIC

FAST STOPS
MAGNETIC DAMPING



A NEW Burlington **A. C. METER**

These new A. C. instruments are *Magnetically Damped* by use of *Alnico Magnets* and are of the Repulsion Vane Type using carefully aged and impregnated field coils and multipliers. All standard ranges available in round, rectangular or square case styles and are guaranteed for one year against defects in workmanship or materials. Refer inquiries to Dept. F-110.

Burlington Instrument Co., Burlington, Iowa

SMALL
PARTS
Cost less when made by
MULTI-SWAGE
The economy way to get a million small parts similar to these —

Examine the tubular metal parts shown here twice size. If you use anything similar . . . in quantities of over a million . . . important savings can be yours. Send us the part and specs. Our quotation will show why the Bead Chain Company's MULTI-SWAGE Process has long been known as the most economical method of making electronic contact pins, terminals, jacks and sleeves. And, why more and more users of mechanical parts (up to 1/4" dia. and to 2" length) employ our facilities. WRITE for Data Bulletin.

THE BEAD CHAIN MANUFACTURING CO.,
Tr. Mark 88 MOUNTAIN GROVE ST., BRIDGEPORT 5, CONN.

Just Published!

ANTENNAS

1. A new book that thoroughly covers basic antenna theory, methods of antenna measurements, and their engineering applications to antennas for all frequency ranges. Treats the significant topics of point sources—power, field, and phase patterns—mutual impedances of antennas—end fire and broadside arrays—linear, loop, slot, helical and other types of antennas . . . stressing the practical aspects of antenna problems throughout. Includes recent advances in the field, and scores of diagrams, equations, tables, and formulas supplement subjects discussed. **By John D. Kraus. 533 pages, 368 illustrations, $8.00.**

TRANSMISSION LINES AND NETWORKS

2. An up-to-the-minute guide book of information on the theory and applications of transmission lines and four-terminal networks. Discusses transmission lines from an analysis of a-c steady-state lines with no reflection, to special considerations for radio-frequency lines, telephone, and telegraph lines, and power transmission lines. Points up useful material on four-terminal networks, and the application of theory to attenuators, impedance-matching networks, and filters. Provides present-day transmission line charts and their use. **By Walter C. Johnson. 367 pages, illustrations, $5.00.**

HIGH SPEED COMPUTING DEVICES

3. Here is a practical manual that gives the various mathematical methods and physical mechanisms which have been developed for use in automatic computation. Familiarizes you with the general character of computing machines . . . outlines the arithmetic techniques employed in their operation . . . and describes basic circuits used to perform various computing machine functions. Describes computers to provide examples of the integration of techniques and components into complete systems, and discusses switches and gates, arithmetic systems, data conversion equipment, etc., etc. **Edited by W. W. Stifler, Jr., E.R.A., Inc. 440 pages, 90 illus., $6.50.**

RADIO ENGINEERING HANDBOOK

New Fourth Edition

4. Provides quick answers to routine and special assignments in communications, broadcasting, aircraft radio, television, and related fields. Reflecting modern developments in the field, this handbook gives a complete coverage of every aspect of radio engineering—from inductance, power-supply systems, and electron tubes . . . to receiving systems, and code reception—all arranged in concise, quick-reference form. **By Keith Henney, Editor-in-Chief. 1197 pages, 1038 ill., $10.00.**

See them 10 days free

McGRAW-HILL BOOK CO.,
330 W. 42nd St., N. Y. C. 18, N. Y.

Send me book(s) corresponding to numbers encircled below for 10 days' examination on approval. In 10 days I will remit for book(s) I keep, plus few cents for delivery, and return unwanted book(s) postpaid. (We pay for delivery if you remit with this coupon; same return privilege.)

1 2 3 4

Name .....
Address .....
City ..... Zone ..... State .....
Position L-11-50
This offer applies to U. S. only

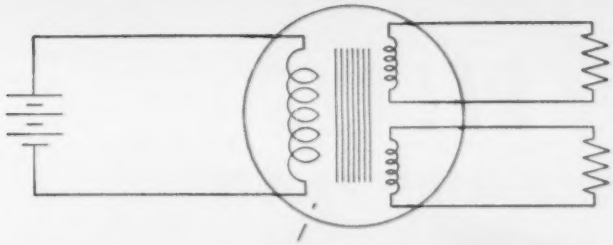

a DC transformer?

Certainly...

Bendix Specialized Dynamotors are made for the Job!

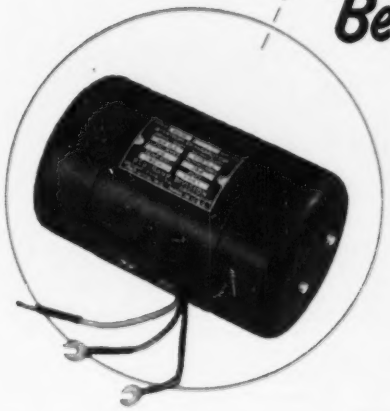

Whenever DC power is required at other than the supply voltage, Bendix* Specialized Dynamotors function as DC transformers. They can be wound for any input or output voltage between 5 and 1200 volts, and they can deliver power up to 500 watts. Multiple outputs can be supplied to correspond with several secondaries on transformers, and their output voltages can be regulated within close limits regardless of input voltage or load variations. Bendix Specialized Dynamotors are tailored to the exact requirements of each application by the design of the windings used in standardized frames. This reduces the cost, size and weight to an absolute minimum, consistent with the operational requirements. Compliance with Government specifications is assured by the choice and treatment of materials and the basic design. *A complete description of your requirements will enable our engineers to make concrete recommendations . . . All orders are filled promptly and at moderate cost.*

*REG. U. S. PAT. OFF.

RED BANK DIVISION OF BENDIX AVIATION CORPORATION

RED BANK, NEW JERSEY

Export Sales: Bendix International Division, 72 Fifth Avenue, N. Y. 11, N. Y.

Write for this colorful and informative book —it's free. You'll find it loaded with facts and figures about all types of dynamotors.



RED BANK DIVISION

Bendix AVIATION CORPORATION

Leach RELAYS
ARE PERFORMANCE PROVED!

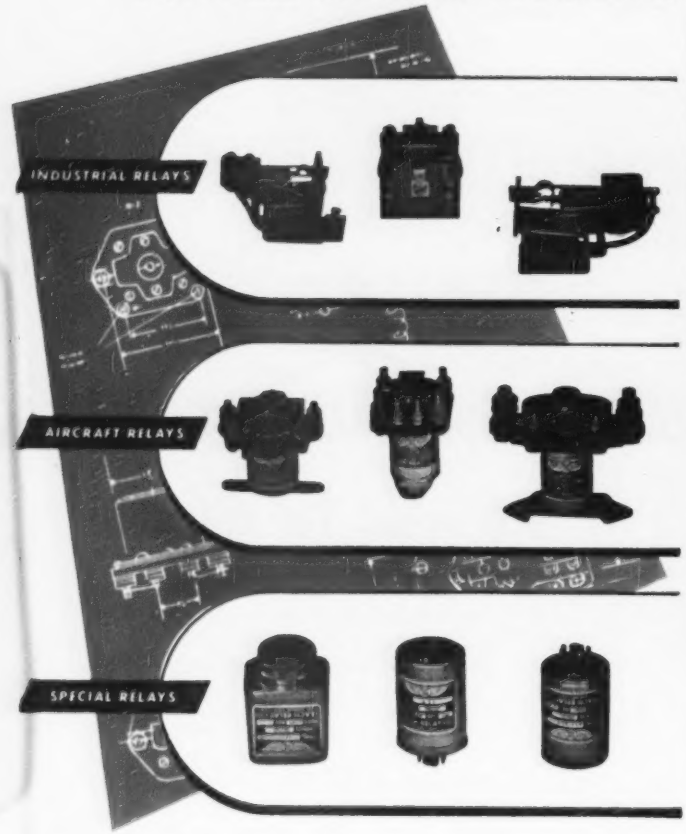

You get better service from LEACH RELAYS because thousands of types of relays for thousands of applications have been proved-in-use for over 30 years.

LEACH RELAYS are designed with an exceptionally high factor of safety for *extra* dependability. Simplicity of designs makes installation quick, easy and inexpensive. Get *all* the facts and make your own comparisons. LEACH RELAYS' outstanding performance, reliability, sturdiness and economy have been *proved-in-use*.

Highest standards of engineering, materials and workmanship assure long, safe, efficient, trouble-free service.

FOR BETTER CONTROLS THROUGH BETTER RELAYS—CONTACT LEACH

LEACH RELAY CO.

6815 AVALON BOULEVARD, ★ LOS ANGELES 3, CALIF.

Representatives in Principal Cities of U. S. and Canada

in the auditorium. There the assembled group, without having the continuity of the discussion interrupted, was able to view images several times larger and more brilliant than the original.

Equipment

The television cameras used in these installations are revamped Army units formerly used in radio-controlled glide bombs which were becoming quite effective at the close of World War II. To minimize the flicker inherent in the original design, the verticle scanning rate was increased from 40 to 60 frames per second. The frame frequency was synchronized with the 60-cycle mains frequency to arrest the motion of any non-

Viewer on panel in control room of supersonic wind tunnel is ten-inch tube

linear portions of the picture. For greater detail the horizontal or line frequency was increased from 14,400 to 19,200 cycles per second, producing a 320-line picture.

In their original state all the camera controls were an integral part of the unit. It was then impossible to make adjustments during the test run and serious degradation in picture quality while the test was in progress might occur. Accordingly, the more important controls were removed from the camera unit and placed on a panel near the viewing equipment, so allowing the observer to keep the picture quality at a usable level. The limiting factor in achieving maximum resolution was apparently in the war-time image orthicon.

These cameras, designed for 24-

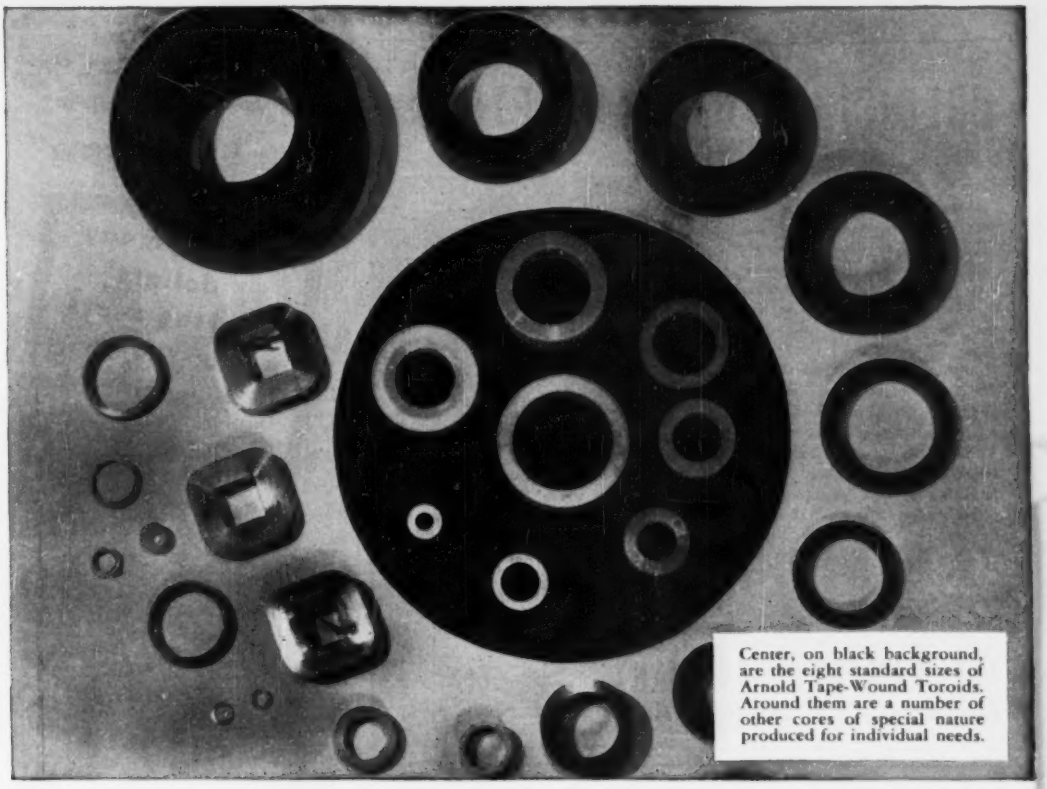

Center, on black background, are the eight standard sizes of Arnold Tape-Wound Toroids. Around them are a number of other cores of special nature produced for individual needs.

ARNOLD TAPE-WOUND TOROIDAL CORES

APPLICATIONS

MAGNETIC AMPLIFIERS
PULSE TRANSFORMERS
NON-LINEAR RETARD COILS and TRANSFORMERS
PEAKING STRIPS, and many other specialized applications.

RANGE OF SIZES

Arnold Tape-Wound Toroids are available in eight sizes of standard cores—all furnished encased in molded nylon containers, and ranging in size from ½" to 2½" I.D., ¾" to 3" O.D., and ⅛" to ½" high.

RANGE OF TYPES

These standard core sizes are available in each of the three magnetic materials named, made from either .004", .002" or .001" tape, as required.

of DELTAMAX 4-79 MO-PERMALLOY SUPERMALLOY*

In addition to the standard toroids described at left, Arnold Tape-Wound Cores are available in special sizes manufactured to meet your requirements—toroidal, rectangular or square. Toroidal cores are supplied in protective cases.

* *Manufactured under licensing arrangements with Western Electric Company.*

WBD 3182

THE ARNOLD ENGINEERING COMPANY

SUBSIDIARY OF ALLEGHENY LUDLUM STEEL CORPORATION

General Office & Plant: Marengo, Illinois

PRECISION POTENTIOMETERS

Various types of potentiometers custom wound to specifications are available. They feature extremely close limits in electrical characteristics and mechanical construction, low electrical noise, low torque, and long life.

All types will operate within specified limits of performance at temperatures —55° C. to +55° C., 95% relative humidity at altitudes up to 50,000 feet. Corrosion resistant materials are used throughout and all insulating parts are fungicided. Our potentiometers meet AN-E-19 specifications.

We invite your inquiries and specifications.



A minor modification of the standard sinusoidal potentiometer type RL-11-C (as illustrated) permits operation up to 1800 RPM. After a test of 28 million cycles at 1800 RPM, one of these units showed negligible wear.

Write for Bulletin F-68.

THE GAMEWELL COMPANY

Newton Upper Falls 64, Massachusetts

COSSOR *for* QUALITY

WHEN TIMING COUNTS you can count on Cossor Twin Beam Scopes



Unique twin beam flat face tube permits EXACT time comparison of two waveforms without phase or frequency error. Beams are independent vertically and locked in horizontal direction, can be separated, superimposed or crossed for any comparative test . . . and . . .

Model 1035 TWIN BEAM SCOPE (illustrated) offers these additional features:

DIRECT time measurement on calibrated controls from 150 millisec. to 1 microsec.

DIRECT voltage measurement on each beam from 500 volts to 1 millivolt.

Recurrent or triggered sweeps from 150 millisec. to 5 microsec. High gain, wideband amplifier,—3 db. at 7 Mc.

Write for details on Model 1428 Scope Camera for still or moving film records.

All instruments and spares in stock New York.

$465 fob Halifax
$450 fob New York

COSSOR (CANADA) LIMITED
301-303 Windsor Street, Halifax, N. S.

BEAM INSTRUMENTS CORPORATION
Room 907, 511 5th Avenue, New York 17, N. Y.

Accurate

"know how"

SPRINGMAKING "know how"—and, of course, modern manufacturing facilities—can mean a lot to spring users. The three springs illustrated above are good examples of how Accurate can slash spring costs with modern methods. Where previously multiple operations and intensive inspection was required in the manufacture of these springs, Accurate was able to develop means of producing each in a single operation so accurately that inspection by the users could be eliminated or substantially reduced. And the unit price of each is a fraction of a cent! Since tens of millions of each of these are in daily use the overall savings are very sizable.

We'd like to show those of you who are users of large quantities of springs how we can cut *your* costs. Write or call today.

Accurate Springs

A *dependable* source of supply!

ACCURATE SPRING MFG. CO.
3830 W. Lake St. • Chicago 24, Ill.

Springs, Wire Forms, Stampings

For inserts in coaxial connectors, "Teflon" helps eliminate distortions in the circuit.

For high-frequency, high-voltage, high-temperature wires, the heat-resistance of "Teflon" makes it a superior insulator.

5 reasons why

DU PONT "TEFLON"*

gives unequaled efficiency in high-frequency transmission

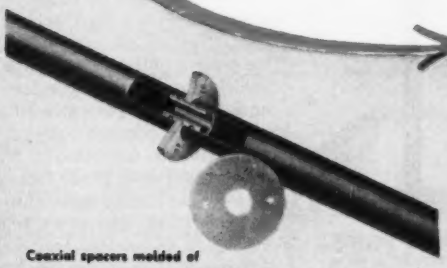

Coaxial spacers molded of "Teflon" can boost transmission-line efficiency more than 10%.

In coaxial cables, "Teflon" is resilient and flexible and has high dielectric strength and low loss factor.

DU PONT'S NEW "TEFLON" tetrafluoroethylene resin is proving to be an excellent insulation for high-frequency wires and cables, coaxial transmission lines for FM radio and TV, and coaxial connectors. "Teflon" offers all these advantages:

1. **Low dielectric constant** — The dielectric constant of "Teflon" (2.0) is less than half that of ceramic! This new Du Pont plastic practically eliminates reflections and distortions in a transmission line when used as insulation in coaxial cables and connectors.

2. **Low loss factor** — The loss factor of "Teflon" is less than 0.0005 over the entire range of frequencies measured to date. Almost no power is lost through transmission-line spacers made of "Teflon."

3. **Heat-resistant** — The heat-resistance of "Teflon" is higher than that of any other thermoplastic (withstands up to 500°F.). And its electrical properties show little change up to 400°F.

4. **Tough and resilient** — "Teflon" withstands abuse—won't crack if dropped. It is resilient and flexible even at extremely low temperatures. Resists damage from vibration or bending when used as insulation on wires and cables.

5. **Zero moisture-absorption** — "Teflon" shows a moisture-absorption of 0.00% by A.S.T.M. D570-42. Hence its electrical properties are unaffected even after prolonged soaking in water.

*REG. U. S. PAT. OFF.

"TEFLON" is supplied by Du Pont in molding powders, tape, and water dispersions. We will gladly suggest molders or fabricators who can supply finished parts of "Teflon." Write today for more information. Our technical staff will be glad to help you. E. I. du Pont de Nemours & Co., (Inc.) Polychemicals Department, Sales Offices: 350 Fifth Ave., New York 1, N. Y.; 7 S. Dearborn St., Chicago 3, Ill.; 845 E. 60th Street, Los Angeles 1, California.

DU PONT
REG. U. S. PAT. OFF.
PLASTICS
Better Things for Better Living
. . . through Chemistry

STUPAKOFF

Announces

a LOW-COST

High-Performance

KOVAR-GLASS





Here is a well-made, dependable, low-priced Kovar-Glass Seal, with the following highly desirable features:

- Easy to Assemble
- Mechanically Strong
- High Flashover Voltage
- High Thermal Shock Resistance
- Attractive Appearance
- Immediate Shipment
- Low Cost

Write for Samples and Prices Typical Stupakoff Kovar-Glass Seals

STUPAKOFF

CERAMIC & MANUFACTURING CO.
LATROBE, PA.

volt d-c operation, were reworked and operated from power supplies energized by the 115-volt a-c mains.

The camera to be installed in the Schlieren receiver in the test capsule at the supersonic wind tunnel was subject to additional alteration. When the atmospheric pressure drops to 10-inch mercury, serious arcing takes place in the high-voltage circuits with corresponding deterioration of the picture. To overcome this difficulty a pressure-tight vessel was constructed and the camera placed within. This vessel was vented to atmosphere and service air allowed to flow through the interior for cooling

Acoustic Shields

Since the sync pulse generators, audio amplifiers and the voltage regulators are an integral part of the camera unit, means for adequate ventilation must be provided. In addition to the general cooling air circulating through the camera compartment, low-velocity jets of air were directed to the face of the orthicon and also to several components which had a tendency to operate at an elevated temperature. All these steps were helpful but there still remained a tendency toward picture deterioration which would begin after several hours.

Cameras are often located in areas of high ambient noise level. To minimize microphonic pickup acoustic shields have been constructed and successfully used. Unfortunately most materials having favorable acoustic properties are also effective thermal insulators. Accordingly it was found necessary to make provisions for circulating cooling air through the interior of the acoustic chamber to maintain satisfactory operating temperature.

The viewing equipment consists mainly of commercial receivers. Ten-inch kinescopes are used in the control rooms. Where it is desired to accommodate a larger group of viewers, units employing sixteen-inch picture tubes have been installed. As a service device, a portable monitor with a three-inch tube has proved valuable for checking cameras and making minor adjustments. The horizontal oscillators on these units were altered to allow

Announcing a 7" TV 'scope...

RCA WO-56A

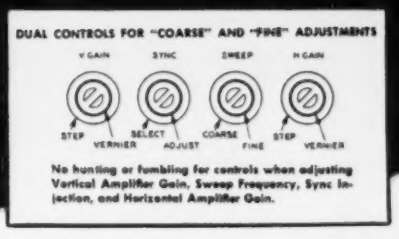

ONLY $197.50
Suggested User Price

Includes set of matched probes and cables (direct probe and cable, low-capacitance probe and ground lead)

FEATURING —

- Giant RCA 7JP1 cathode-ray tube.
- Direct-coupled, 3-stage, push-pull, vertical and horizontal amplifiers.
- Frequency-compensated and voltage calibrated attenuators on both amplifiers.
- A set of matched probes and cables.
- Panel-source of 3 volts peak-to-peak calibrating voltage.
- Identical vertical and horizontal amplifiers with equal phase-shift characteristics.
- Retractable light shield for convenience and visibility.
- New *green* graph screen with finely ruled calibrations.
- Magnetic metal shield enclosing CR tube to minimize hum-pickup from internal fields.

SPECIFICATIONS—

- Deflection Sensitivity: 10 rms millivolts per inch.
- Frequency Response: Flat within −2 db from dc to 500 kc; within −6 db at 1 Mc; useful beyond 2 Mc.
- Input Capacitance: Less than 10 uuf with WG-216A Low-Capacitance Probe.
- Square-Wave Response: Zero tilt and overshoot using dc input position. Less than 2% tilt and overshoot using ac input position.
- Linear Sweep: 3 to 30,000 cps with fast retrace.
- Trace Expansion: 3 times screen diameter in vertical and horizontal axis, with 3 times centering control.
- Size 13¾" h, 9" w, 16¾" d. Weight only 31 pounds (approx.)

ADVANCED SWEEP FACILITIES—

- Preset fixed sweep positions for vertical and horizontal television waveforms.
- Positive and negative syncing for easy lock-in of upright or inverted pulse waveforms.
- 60-cycle phase-controlled sweep and synchronizing.

Built for laboratory, factory, or shop use, the WO-56A combines the advantages of high-sensitivity and wide-frequency range in a *very small* instrument with a *large* cathode-ray tube.

Designed with the user in mind, this new 'scope can be depended upon to provide sharp, bright, large, and accurate pictures of minute voltage waveforms over the entire useful surface of the 7JP1 screen.

The direct-coupled amplifiers are provided with ac positions so that measurements can be made with or without the effects of any dc component.

Square-wave reproduction is excellent, whether the application is low-frequency TV sweep-alignment or observation of high-frequency steep-fronted sync and deflection waveforms.

The excellent linearity and fast retrace of the sweep or time base are functions of the Potter-type oscillator and the undistorted reproduction of the sawtooth by the wide-band horizontal amplifier. The preset-fixed positions provide rapid switching between vertical and horizontal waveforms in TV circuits.

Truly, the WO-56A is a most useful and practical instrument for everyday work in the fields of television, radio, ultra-sonics, audio, and a wide array of industrial applications.

For details, see your RCA Distributor, or write RCA, Commercial Engineering, Section K42X, Harrison, N.J.

RADIO CORPORATION of AMERICA
TEST EQUIPMENT **HARRISON, N. J.**

AN IMPRESSIVE LABORATORY STANDARD

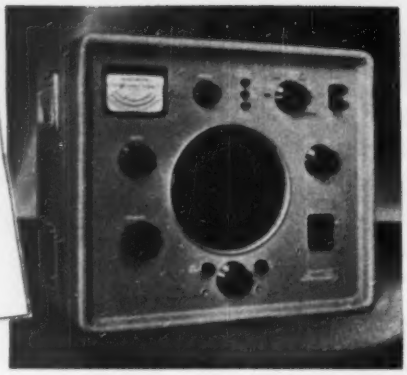

Video Oscillator TF 885 is a wide range beat frequency oscillator, impressive alike in performance, stability and appearance. It embodies thermally screened oscillators, dual frequency standardisation, a ladder - network attenuator and really effective automatic level control. The output, monitored by a vacuum tube meter, may be of sine or square waveform and is continuously variable from 316μV up to 31.6V—1 watt into 1000Ω sine, or 64V peak-to-peak. The frequency cover—2 bands on a generous 8-inch dial—is 25 c/s to 5 Mc/s sine and 50 c/s to 150 kc/s square. At full load individual harmonics are generally below 3%, falling considerably at lower outputs. The frequency characteristic is within 1db, as are the attenuator steps at other than extreme h.f. attenuation.

Further particulars are obtainable from any of the addresses below.

MARCONI INSTRUMENTS LTD

U.S.A. Sales and Service: 23-25 Beaver Street, NEW YORK, 4

CANADA: CANADIAN MARCONI LIMITED, Marconi Building, St. Sacrament Street, MONTREAL

ENGLAND (Head Office and Works): ST. ALBANS, HERTFORDSHIRE

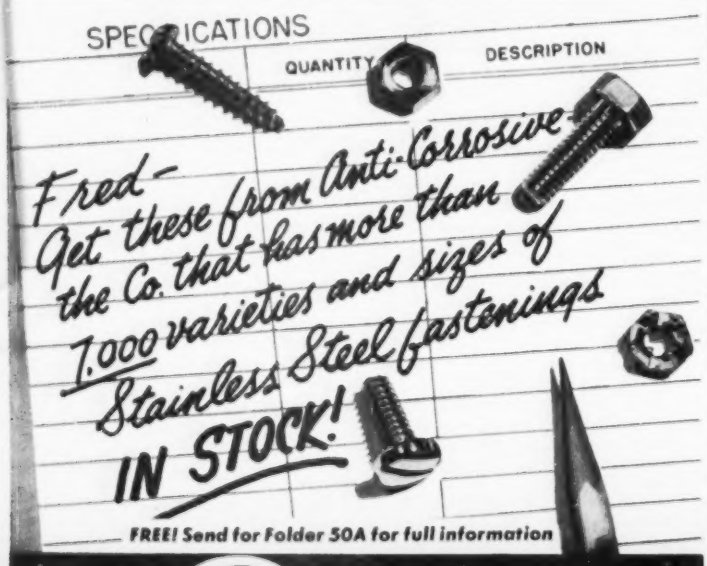

FREE! Send for Folder 50A for full information

Anti-Corrosive Metal Products Co., Inc. SINCE 1927

Manufacturers of STAINLESS STEEL FASTENINGS

CASTLETON ON HUDSON, NEW YORK

WHERE FIDELITY COUNTS

ANN BLYTH starring in Universal-International's "Katie Did It"

American D-33

DYNAMIC FULL VISION MICROPHONE

Lovely Ann Blyth, star of Universal-International Pictures, is one of the many stars relying on microphones made by American to reproduce with fidelity the tonal qualities of dramatic interpretations. Many radio, television and motion picture companies throughout the world are using the new American D-33, Full Vision, Dynamic Microphone.

Beautifully designed, attractively finished in Gold and Black. This new dynamic microphone provides superior quality with omni-directional pickup and requires no pre-amplifier. The D-33 is readily adaptable for stand or suspension and is quickly detachable for hand use. Weighs only seven ounces. The D-33 is available in any impedance 30 to 500 ohms and is equipped with "Latch-lock" plug and 25 feet of 2 conductor shielded cable.

D-33
FULL VISION
DYNAMIC
MICROPHONE
For TV • AM • FM
• Broadcasting
• Recording
• Public Address

WRITE FOR DESCRIPTIVE CATALOG

American Microphone Co.
370 S. Fair Oaks Ave. Pasadena 1, Cal

We repeat...

you can depend upon

MITCHELL-RAND

TO PRODUCE WAXES AND COMPOUNDS AND SOLVE INSULATION PROBLEMS

The television industry had a serious insulation problem with fly-back transformers... all available waxes were tried and they just couldn't hold up. Mitchell-Rand undertook to develop an Impregnating and Dip Coating Wax which would stand the gaff and produced

R-4005 HIGH MELTING POINT WAX

FOR INSULATING AND MOISTURE PROOFING...AND THE PROBLEM WITH FLY-BACK TRANSFORMERS FOR TELEVISION USE IS NO MORE!

R-4005 SPECIFICATIONS	
MELTING POINT (DRIP)	260/265 F
COLD FLOW (M-R)	255/260 F
PENETRATIONS	
32/200/60	10-12
77/100/5	19-21
115/50/5	28-32
COLOR	Tan
APPLICATION TEMPERATURE	285/350 F
SPECIFIC GRAVITY	0.91
FLASH POINT	490 F
SOFTENING POINT (R & B)	250/260 F
DIELECTRIC DISSIPATION AND POWER FACTOR	0.0054
DIELECTRIC CONSTANT	2.24

R-4005 for impregnating and dip coating coils, transformers, capacitors, etc., features high melting point, low impregnating viscosity, good electrical properties, resistance to low temperature crazing, good transparency and good adhesion. R-4005 is recommended for extreme high temperature applications on parts designed to operate up to 105-110°C, and its low temperature flexibility, coupled with its low degree of thermal shrinkage, make R-4005 well suited for units that must withstand extreme low temperatures down to minus 40°C. Its low electrical loss factor recommends R-4005 for impregnating special high quality coils. By altering wax bath temperatures and preheat cycles a wide latitude of single dip coating thicknesses can be obtained. The relatively transparent coatings are easily read through, and the surfaces obtained are semi-gloss and relatively non-blocking.

Write for your laboratory test samples . . . . . free upon request.

MITCHELL-RAND INSULATION CO. Inc.

51 MURRAY STREET • COrtlandt 7-9264 • NEW YORK 7, N. Y.

A PARTIAL LIST OF M-R PRODUCTS: FIBERGLAS VARNISHED TUBING, TAPE AND CLOTH • INSULATING PAPERS AND TWINES • CABLE FILLING AND POTHEAD COMPOUNDS • FRICTION TAPE AND SPLICE • TRANSFORMER COMPOUNDS • FIBERGLAS SATURATED SLEEVING • ASBESTOS SLEEVING AND TAPE • VARNISHED CAMBRIC CLOTH AND TAPE • MICA PLATE, TAPE, PAPER, CLOTH, TUBING • FIBERGLAS BRAIDED SLEEVING • COTTON TAPES, WEBBINGS AND SLEEVINGS • IMPREGNATED VARNISH TUBING • INSULATED VARNISHES OF ALL TYPES • EXTRUDED PLASTIC TUBING

semi-knife-edge bearing reduces frictional wear

This is Ward Leonard's new Bulletin 110 Midget Relay for long, trouble-free service, particularly in equipments subject to vibration.

Exceptionally good vibration characteristics are due to proper proportioning of contact masses and springing combined with heavy pressures on both normally open and normally closed contacts.

Higher contact ratings than most midgets. Available up to 3-pole, double throw. Contact finger leads are insulated with the new, impregnated glass-fiber tubing.

Write for Bulletin 110. Ward Leonard Electric Co., 31 South Street, Mount Vernon, N. Y. Offices in principal cities of U. S. and Canada.

WARD LEONARD ELECTRIC COMPANY

Result-Engineered Controls

RESISTORS • RHEOSTATS • RELAYS • CONTROL DEVICES

their operation at the higher frequency.

For combustion study, the color of a flame contains a wealth of information concerning its characteristics. Observation of the flame becomes of increased importance when it is realized that such a procedure provides the only method of providing certain information. Unfortunately the group in charge of operating the combustor does not always have free access to viewing the unit while it is in the test chamber. Color television as a means for furnishing operating data would be invaluable.

The frame sequential method with mechanical color separation appears to be a practical solution for industrial color television. Since all scanning wheels would be operated from the same power source, there is no difficulty in maintaining synchronism. The problem of compatibility does not exist in industrial television and, accordingly, the only limit to maximum bandwidth then is one of a technical nature.

The need for rugged, dependable television equipment for use in engine research is urgent. Equipment not affected by extreme temperature and pressure changes is a primary requirement. In addition, since all engine testing installations are noisy, the camera should be capable of producing picture signals relatively free from noise disturbances.

Three-In One Broadcast

LATEST system to increase the usefulness of f-m broadcast channels was recently demonstrated by William S. Halstead of Multiplex Development Corp. Using the facilities of former WGYN, New York City, he broadcast simultaneously a musical program heard on receivers tuned to 97.9 mc and a second musical program that could be picked up only with a special receiver. Later, a facsimile picture was transmitted over the second circuit, with no interference to the main program and no slop-over into adjacent channels.

The system is a simplification of

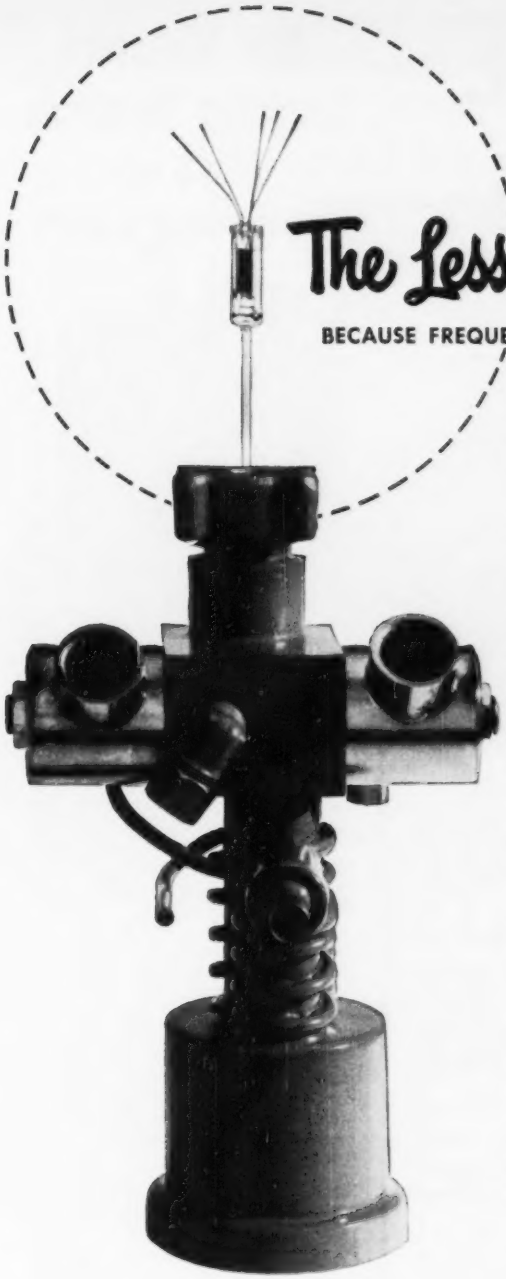

The Less Getter the Better

BECAUSE FREQUENCIES ARE HIGHER AND TUBES ARE SMALLER

IF you manufacture small electronic tubes, DPi's new VMF-5 Exhaust Unit pictured here can provide a happy ending to your quest for lower, more consistent residual gas pressure.

With today's push toward ever-higher frequencies, you can't afford to ignore the effect of residual gas on the low capacitance demanded in tubes. And with the small size of today's tubes, you can't use much getter to "clean up" residual gas, because the metallic film deposited can result in serious inter-element leakage.

VMF-5 Exhaust Units quickly take pressure down to 0.1 micron Hg before the getter flash, as compared with the 10- to 100-micron pressures to which older equipment limits you. They come equipped with water-cooled ports that fit any standard tubulation or can be fitted with ports of your own design. Two a-c solenoid valves (or three if required by the design of your rotary exhaust machine) isolate the diffusion pump during roughing.

The VMF-5 is just one of a series of high vacuum pumps designed by DPi for the specific conditions of the electronics industry. They are made in a wide range of pumping speeds.

Before you go ahead with the design and production of a tube exhaust system, call on DPi. There's no obligation, of course, and chances are that DPi can help build better reliability into your product at less cost. Write: Vacuum Equipment Department, ***Distillation Products Industries,*** 727 Ridge Road West, Rochester 3, N. Y. (Division of Eastman Kodak Company)

high vacuum research and engineering

DPi

Also . . . vitamins A and E . . . distilled monoglycerides . . . more than 3300 Eastman Organic Chemicals for science and industry.

TWO-in-ONE

D·C·P* adds or subtracts two input voltages



**Differential Computing Potentiometer*

"Two potentiometers in one" most aptly describes the Fairchild Differential Computing Potentiometer. This versatile unit makes it possible to combine two input variables and obtain an output that is proportional to their sum or difference.

Available in quantity, the D-C-P costs less than two separate type 748 units while offering high resolution and accuracy of a single potentiometer. Linearity of ±0.10%, high resolution, long life, low noise level, and low torque—all Fairchild Linear Potentiometer features—are built into the D-C-P.

Suggested applications include servomechanisms, instrument controls, and computing and analyzing instruments. The D-C-P will directly replace two single potentiometers when one is used for compensation or correction purposes. For more data, write to Fairchild Camera and Instrument Corporation, 88-06 Van Wyck Boulevard, Jamaica 1, N. Y. Dept. 140-12A.

FAIRCHILD
PRECISION POTENTIOMETERS

WIRE *Made to Your Order*

• Here are (1) Engineering and research facilities to work on your particular wire problems; (2) Production geared to any quality and quantity desired; (3) Unsurpassed craftsmanship; and (4) Wire that's made right
• Let us quote!

YOUR PRODUCT

HUDSON WIRE

Partial List of Products...

Bare Wire (Hudson Wire Division):
Copper. Brass. Bronze. Zinc. Silver-plated. Tin. Phosphor-bronze. Nickel. Silver. Cadmium. Specialty Wires.

Insulated Wire (Winsted Division):
Enameled. Lits. Cement-coated. Enameled. Cotton. Silk. Celanese. Glass-fibre. Enameled Aluminum. Formvar. Loop Wire. Etc.

Winco — HuDCo

One of the Oldest Fine Wire Companies in America

HUDSON WIRE COMPANY

GENERAL OFFICES: OSSINING, N.Y. • WINSTED DIVISION: WINSTED, CONN.

New Miniature Insulated Terminals

to help your miniaturization program



Featuring extremely small size combined with excellent dielectric properties, three new miniature insulated terminals are now available from CTC.

Designed to meet the requirements of the miniaturization programs now being carried out by manufacturers of electrical and electronic equipment, the terminals come in three lengths of dielectric and with voltage breakdown ratings up to 5800 volts. In addition, they have an extremely low capacitance to ground.

The X1980XA is the smallest terminal, having an over-all height of only three-eighths of an inch including lug. Insulators are grade L-5 ceramic, silicone impregnated for maximum resistance to moisture and fungi.

All terminals have hex-type mounting studs with 3/48 thread or .141" OD rivet style mounting. Mounting studs are cadmium plated, terminals are of bright-alloy plated brass.

Write for additional data.



custom or standard the guaranteed components

CAMBRIDGE THERMIONIC CORP.
437 Concord Ave., Cambridge 38, Mass.
West Coast Stock Maintained By: E. V. Roberts, 5014 Venice Blvd., Los Angeles, California

IT'S A TAPE RECORDER

IT'S A DISC RECORDER

It's *GENERAL INDUSTRIES'* latest sound reproduction triumph

MODEL 250

TAPE-DISC RECORDER ASSEMBLY

* Records on tape
* Records on discs
* Plays back both
* Plays any 78 R.P.M. Record

(*) When connected with the proper amplifier.

Here's a fast-moving money-maker that's loaded with all the features a home-recording enthusiast could ask for. It records on tape or disc . . . records from tape to disc or disc to tape . . . makes possible a solid hour of selected uninterrupted entertainment.

Representing years of development by General Industries—oldest name in the phonomotor field—the Model 250 contains many design innovations, including foolproof operating features that anyone can understand.

Comprehensive, easy-to-understand service manual is included with each Model 250 unit. Included in manual is a suggested amplifier circuit as well as a complete amplifier parts list.

New catalog sheet, describing all of the Model 250 recording and playback features will be sent upon request. Write for your copy *today*.

The GENERAL INDUSTRIES Co.

DEPARTMENT B • ELYRIA, OHIO

QUICK FACTS about S.S.WHITE FLEXIBLE SHAFTS

They are made in two classes:

POWER DRIVE—For transmitting rotary power to instruments and other mechanisms from small motors or other power sources.

REMOTE CONTROL—For the control of parts that require automatic or manual adjustment from a remote point. Remote control shafts are engineered for smooth, sensitive control because they have minimum torsional deflection, approximately equal deflection in either direction of rotation and low internal friction.

FLEXIBLE CASINGS—Serve as runways to prevent "helixing", to protect the shaft and to retain lubricant. Casings are metallic, fabric-covered and rubber-covered depending on the service.

END FITTINGS — for connecting shafts and casings are available for almost any shaft application.

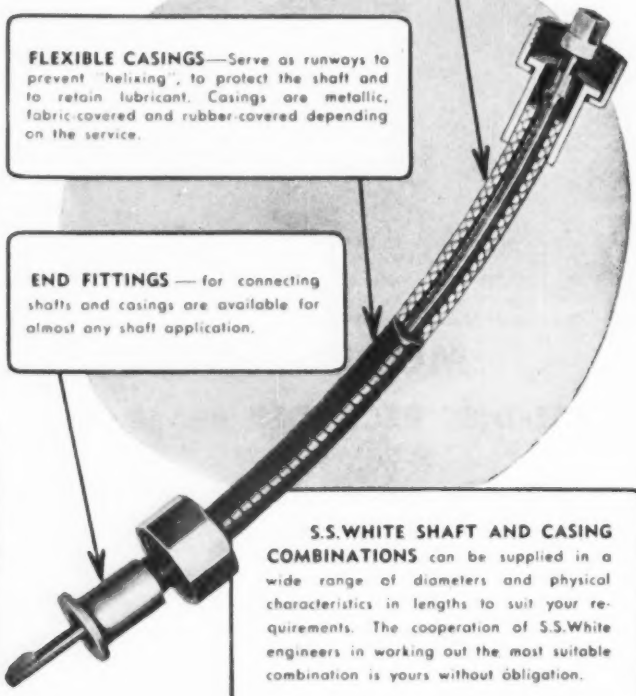

S.S.WHITE SHAFT AND CASING COMBINATIONS can be supplied in a wide range of diameters and physical characteristics in lengths to suit your requirements. The cooperation of S.S.White engineers in working out the most suitable combination is yours without obligation.

S.S.White MAKES IT RIGHT

WRITE FOR NEW BULLETIN 5008

It contains the latest information and data on flexible shafts and their application. Write for a copy today.

THE S.S.White INDUSTRIAL DIVISION
DENTAL MFG. CO.

Dept. E 10 East 40th St.
NEW YORK 16, N. Y.

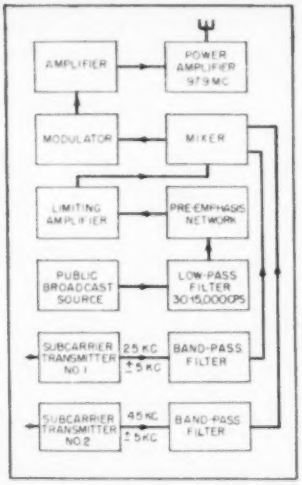

FIG. 1—Simplified block diagram of three-channel system using two subcarriers. Frequencies other than that of main carrier are representative

the technique first used by E. H. Armstrong in 1934.[3] Optimum results are obtained with an f-m modulator[4] having s/n ratio of better than 60 db from 30 to 15,000 cps. By keeping subcarrier modulation below −60 db, referred to normal program level of the main channel, no interference is experienced. One or more subcarrier f-m transmitters are used for additional channels, as shown in Fig. 1. The carriers are well above audible frequencies, those indicated in the block diagram being merely representative. Deviation or swing employed in modulating these subcarrier transmitters is low compared with standard broadcast practice of ±75 kc.

In the original Armstrong demonstration a receiver was required that could separate the signals. In the new development, the listener on the main channel is unaware of the additional intelligence. At the receiving point, Fig. 2, output from the regular f-m discriminator circuit is fed through a high-pass filter to the subcarrier receiver unit. Either of the subcarrier channels can be selected and the audio output connected to the amplifier and speaker.

Since the multiplex channels were developed as a means of interconnecting f-m broadcast stations now using telephone lines, no attempt

here's STABLE VOLTAGE *for Sensitive Equipment*

Stabilizers are used for such voltage-sensitive devices as: motion picture sound equipment, radio testing equipment, telephone equipment, laboratory equipment, and even regulating circuits for rural home appliances.

how to get a steady 115 volts...

General Electric Voltage Stabilizers automatically level out variations in line voltage between 95 and 130 v *almost instantaneously*. They deliver, to voltage-sensitive equipment, a constant a-c potential.

- **Rated output is 115 volts**—for any input between 95 and 130 volts. (Other output voltage ratings are available.)
- **Variation from rated output is less than** ± 1% for constant loads of unity power factor.
- **Ordinary voltage surges**—caused by inductive kicks, switching, etc.—are absorbed.
- **Stabilizers have no moving parts, require** virtually no maintenance.

Illustrated is the 50-volt-ampere model. Others are available with ratings from 15- to 5000-va. For general information write for Bulletin GEA-3634B, Apparatus Department, General Electric Company, Schenectady 5, N. Y.

Your G-E office will be glad to evaluate your particular needs, or we can advise you by mail if you will give us data and a description of the circuit and load. Address inquiries to Specialty Transformer Sales Division, 1635 Broadway, Ft. Wayne, Indiana.

GENERAL ELECTRIC

413-78

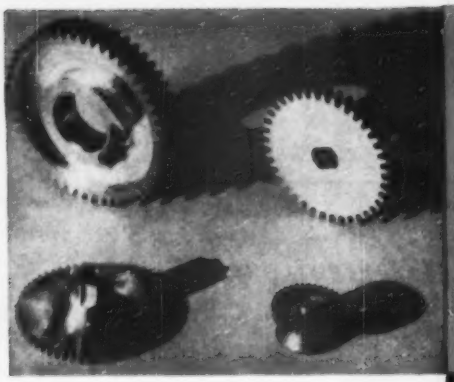

GEARS WITH SHAPES

- SPUR
- WORM
- SPLINE
- HELICAL
- SPROCKET
- STRAIGHT BEVEL
- GROUND THREADS

Special Shapes and Features? . . . Tolerances within .0005" . . . Let our experience in supplying precision small and medium sized gears with such features solve these production problems for you . . . Ask for quotation on your job specifications. Circular on Request.

MEMBER OF AGMA

Beaver Gear Works Inc.

1021 PARMELE STREET, ROCKFORD, ILLINOIS

Measure Time ACCURATELY

10 MICROSECONDS TO 1 SECOND

THE AMERICAN HIGH SPEED CHRONOSCOPE

Simple, Accurate and Reliable, the Chronoscope indicates significant time intervals directly in milliseconds. Operation is completely automatic and the time indicator does not drift. A few of the varied applications include—relay, contactor and fuse testing, shutter speed and flash lamp timing, automatic system development and human reaction studies. PRICE: $375. Write for Bulletin 100A.

When time is your problem—Consult us.

AMERICAN CHRONOSCOPE CORPORATION

316 WEST FIRST STREET MOUNT VERNON, N. Y.

TELEPHONE: MOUNT VERNON 4-7030



FIG. 2—Block diagram of demonstration receiving setup for three channels

has been made to extend the frequency range beyond 10 kc. At the same time, there is no deterioration to the regular 30-15,000-cps response to the main channel.

In the broadcast network application, the auxiliary channels can be used for teletypewriter, facsimile, audio program or even a program that is being relayed in a direction opposite to that in which the main broadcast network is set up. Alternatively, a station carrying one network program for listeners can at the same time relay a different network program for the benefit of another station or stations in the physical chain.

One variation of these arrangements is shown in Fig. 3. This possible combination shows three f-m broadcast stations with their

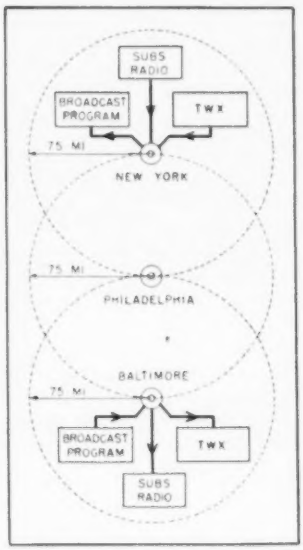

FIG. 3—A possible three-station f-m broadcast network with subcarrier subscription radio and teletype channels superimposed

PEAK

IN POWER VERSATILITY QUALITY PERFORMANCE

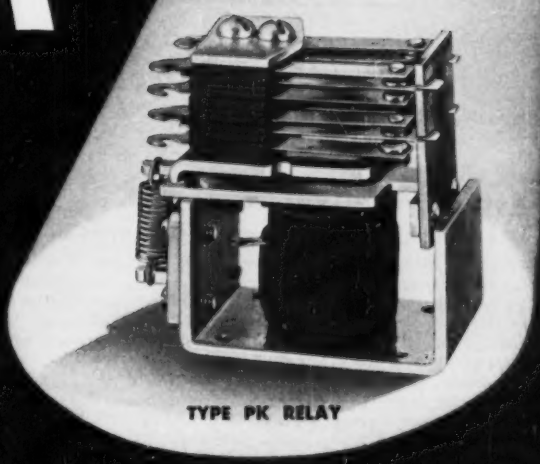

TYPE PK RELAY

HERE ARE THE FACTS AND FIGURES:

CONTACTS: 10 amp. standard. 24 volts D.C., 115 volts A.C.
15 amp. contacts available.

SENSITIVITY: D.C.: 4 pole 1.5 watts
2 pole .7 watts
A.C.: 4 pole 5 volt amperes
2 pole 2.5 volt amperes
Can also be furnished in 6 pole AC and DC up to 4000 Ohms.

COIL: To 115 volts D.C., 230 volts A.C.

NOMINAL HEAT USE: D.C. 30° C above room ambient
A.C. 45° C above room ambient

MAX. INPUT FOR 85° RISE: D.C. 5 watts
A.C. 11 volt amperes

MOUNTING: Base or end mounting

WEIGHT: 4.5 oz. 4 P.D.T.

WEIGHT HERMETICALLY SEALED: 7.7 oz.

DIMENSIONS: Open Relay—2 1/16", 1 1/8", 2 1/16"
Sealed Relay—3 1/8", 1 1/2", 2 1/16"
Overall Mounting Flange—3 1/8"
Center to Center Mounting Holes—2 11/16"

A Quality Relay

The new Allied PK Relay is designed to offer versatility in a power relay where quality and low cost are factors. Besides stability in operation its reliability allows a range in applications from high quality instruments to vending machines. The PKU relay will comply with Underwriters' Laboratories requirements and can also be supplied hermetically sealed.

Bulletin PK gives complete details. Send for your copy today.

Be sure to send for your copy of Allied's Relay Guide. It gives the engineering data for 27 Allied relays in a concise tabular form for easy reference.

ALLIED CONTROL COMPANY, INC. 2 EAST END AVENUE, NEW YORK 21, N.Y.

NEW!

THE HIGHEST GAIN COMMUNICATIONS ANTENNA EVER BUILT!



VERTICAL RADIATION PATTERN OF TYPE 3000 ANTENNA

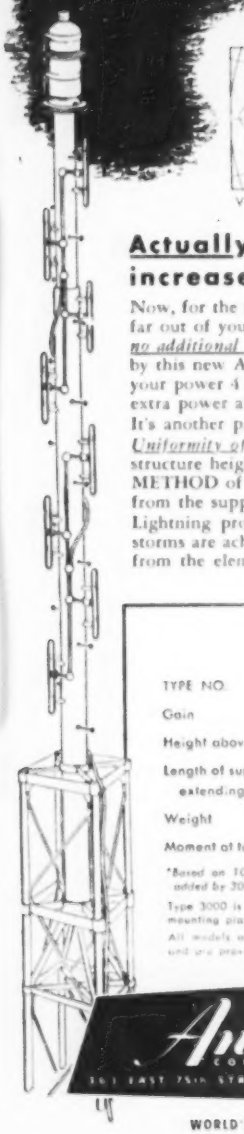

Actually delivers 6 db . . . . . increases your power 4 times!

Now, for the first time, you can operate in areas previously far out of your reach. This vast extra service area is yours at *no additional operating cost* because the 6 db actually delivered by this new ANDREW antenna is equivalent to increasing your power 4 TIMES! Think of the economy! This tremendous extra power also fills in any dead spots.

It's another pace-setting ANDREW "first".

Uniformity of performance is assured regardless of supporting structure height through a NEW EXCLUSIVE ANDREW METHOD of electrically isolating the radiating elements from the support structure.

Lightning protection and quieter reception during electrical storms are achieved by a DC path which conducts static charges from the elements to ground.

SPECIFICATIONS
148-174 MC

TYPE NO.	3000	3001	3002
Gain	6 db	6 db	3 db
Height above top of tower	27½ ft.	27½ ft.	13½ ft.
Length of support mast extending into tower	5 ft.	5 ft.	5 ft.
Weight	625 lbs.	375 lbs.	175 lbs.
Moment at tower top*	9300 ft. lb.	6150 ft. lb.	1600 ft. lb.

*Based on 100 mph wind loading and ½" radial ice. Moments include loading added by 300 mm beacon for Type 3000 and double obstruction light for Type 3001.

Type 3000 is designed to support a 300 mm code beacon, and includes a suitable mounting plate. Type 3001 is designed to support a double obstruction light.

All models are designed for connection to ANDREW Type 737 transmission line, and are provided with climbing steps.

All orders filled chronologically. Deliveries begin September 1. Write, wire or phone (ask for Mr. Bickel) today.

Andrew CORPORATION
363 EAST 75th STREET CHICAGO 19

ANDREW

WORLD'S LARGEST ANTENNA EQUIPMENT SPECIALISTS

TRANSMISSION LINES FOR AM FM TV • ANTENNAS • DIRECTIONAL ANTENNA EQUIPMENT
ANTENNA TUNING UNITS • TOWER LIGHTING EQUIPMENT • CONSULTING ENGINEERING SERVICES

overlapping service areas indicated by dashed lines. Conventional broadcast receivers, subscription radio receivers (capable of receiving special programs) and teletypewriter receivers are assumed to be located throughout each service area. The regular broadcast program is shown fed into the Baltimore transmitter whence it is relayed through Philadelphia to New York. It is also picked up by listeners in the three service areas. This program can be converted to audio in New York and put on a wire line or otherwise relayed.

The subscription radio channel, on the other hand, feeds from New York southward to Baltimore by means of a subcarrier. This program, too, can be picked up in each of the service areas but only by special receivers.

The teletypewriter subcarrier circuit originates in New York and terminates in Baltimore, but any other authorized agency within the service area of any of the relay broadcast stations can be equipped with a special receiver to copy messages.

References

(11) E. H. Armstrong, A Method of Reducing Disturbances in Radio Signaling by a System of Frequency Modulation, *Proc. IRE*, p. 689, May 1936.

(12) J. R. Day, Serrasoid F-M Modulator, ELECTRONICS, p. 72, Oct. 1948.

Tower Carrier Alarm

By Karl Neuwirth
Transmitter Supervisor
WNEW Transmitter
Kearny, N. J.

The purpose of the alarm is to alert the operator in case of carrier failure at either tower of the two-tower array.

When normal energy is radiated, the two relays K_1 and K_2 shown in Fig. 1 are held with contacts open by the rectified r-f current fed back from each tower. An abnormal condition anywhere in the transmitter, transmission line or at either tower will cause a decrease in radiated power. Either or both relays will then fall out, causing an alarm bell to ring.

Sometimes static discharges or electric storms establish arcs at a transmitter tower gap. These are sustained by the transmitter output and yet are of insufficient propor-

HIGH FREQUENCY INDUCTANCE HEADACHES?

CORNING HAS THE CURE!

HERE ARE A FEW OF THE UNLIMITED DESIGN POSSIBILITIES



Corning Metallized Inductances are superior in every way for high frequency applications. Their electrical characteristics include low temperature coefficients, high Q and high stability. The smooth glass wall insures noiseless tuning and fine adjusting screws permit rapid and accurate alignment.

Inductances used in television and F.M. tuners have a whale of an effect on the ultimate performance of the set. If they are unstable when subjected to vibration or temperature changes, you're in for trouble. You can forget about these problems by using Corning Metallized Glass Inductances.

With Corning Inductances, the integral contact of fired-on metallizing with specially selected glass forms, provides unusually high temperature stability. Drift is negligible, even under extreme temperature changes. And the unique, rugged construction of Corning Inductances makes them unaffected by rough handling or vibration. *This all adds up to inductances that are completely trouble-free.*

There is no limit to the design possibilities of Corning Inductances. Your most exacting specifications can be met in fixed tuned, permeability tuned or permeability inductance-trimmer combinations. Variable, double pitch or uniform windings are easily supplied. Assembly is quickly and simply accomplished by ordinary soldering or grommeting methods.

Put your inductance headaches in the hands of Corning engineers. Find how easy it is to get improved tuner performance at low cost. Further information on request. Write today.

CORNING GLASS WORKS
ELECTRONIC SALES DEPARTMENT

CORNING, N. Y.
Corning means research in Glass

METALLIZED GLASSWARE: INDUCTANCES · CAPACITORS · BUSHINGS · ALSO A COMPLETE LINE OF TELEVISION TUBE BLANKS

Here's why those in the know

–demand

CANNON PLUGS

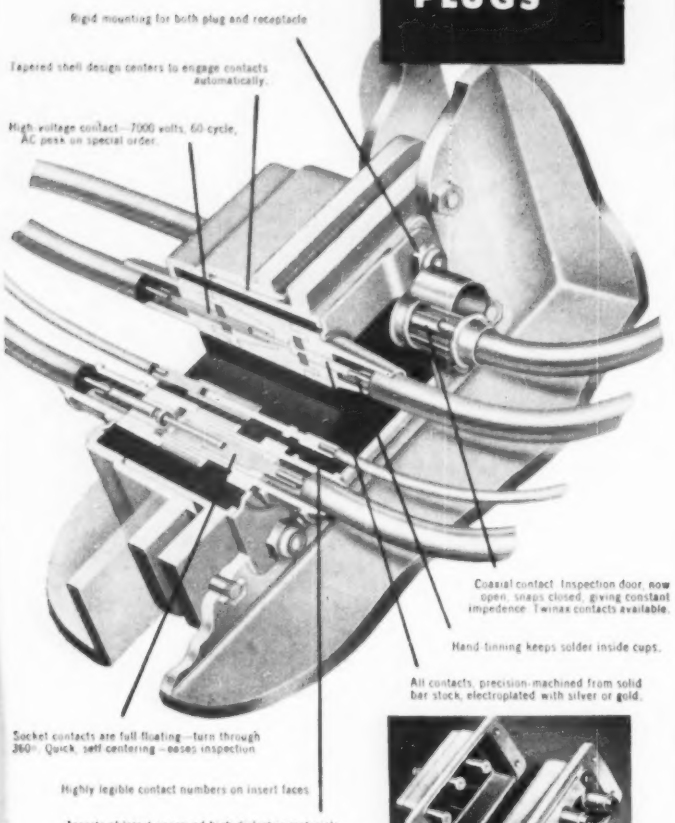
Rigid mounting for both plug and receptacle
Tapered shell design centers to engage contacts automatically.
High voltage contact—7000 volts, 60-cycle, AC peak on special order.
Coaxial contact. Inspection door, now open, snaps closed, giving constant impedence. Twinax contacts available.
Hand-tinning keeps solder inside cups.
All contacts, precision-machined from solid bar stock, electroplated with silver or gold.
Socket contacts are full floating—turn through 360°. Quick, self centering—eases inspection.
Highly legible contact numbers on insert faces.
Inserts of latest approved high dielectric materials.

Your requirements are responsible for the 8 to 10 design advantages found in each type of Cannon Plug. That's why engineers know the specification is right when it calls for CANNON. The DP Connector Series is just one of many Cannon types — world's most complete line. Request bulletins by required type or describe connector service you need.



Insert arrangements are available with 2 to 45 contacts ranging from 15 amp to 200 amp capacity. Continuous shielding available in Coaxial and Twinax. Metal finish on shells for shielding and bonding . . . tin plating on aluminum. Other finishes available on special request.

Type DPD Connectors are permanent installations in rack and panel equipment . . . mate automatically . . . have weight and space-saving advantages over other connector types.

CANNON ELECTRIC

Since 1915

LOS ANGELES 31, CALIFORNIA

REPRESENTATIVES IN PRINCIPAL CITIES

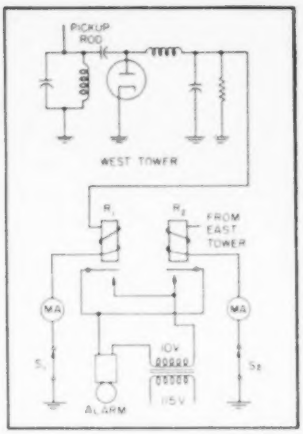

FIG. 1—Carrier-failure alarm used at WNEW. The East tower unit is similar to that used at the West tower

tion to trip the transmitter overload relays. The alarm described will quickly indicate such a condition. The arc is extinguished by cutting the carrier momentarily.

Switches S_1 and S_2 in the diagram are momentary-break types used to test the alarm. The milliammeters indicate visually the strength of current in each tower. The pickup rods are mounted close to the antenna-feed leads.

Audio-Input Limiter For Mobile F-M

BY LAWRENCE C. FULLER JR.
RCA-Victor Division
Radio Corporation of America
Camden, N. J.

INEXPENSIVE AND COMPACT, the audio-input limiter described provides modulation limiting for mobile f-m transmitters. It permits maximum coverage for a given power by providing 100 percent modulation without the dangers of adjacent channel interference and receiver distortion from overmodulation. The limiter avoids the distortion introduced by conventional circuits and may be used in public address systems to prevent acoustic feedback. Its application is restricted to use with a carbon microphone.

Basic Circuit

The microphone shown in Fig. 1 receives direct current from the B

ONE SOURCE FOR COMPLETE VOLTAGE CONTROL SERVICE



Type 1126

Type 20

Type UCIM

Type 116



Type 116U

Effective performance of today's highly specialized electrical equipment is dependent on precision voltage control. The Superior Electric Company provides an authoritative, dependable, complete source for voltage control apparatus. If your application involves the control of heat, light, sound, or any phase of electronics or power, consult the trained engineering service afforded by Superior (see list at right). These field men are specialists in voltage control — backed by factory technicians and know-how.



Type MW1256-3



VARICELL



Type 1E5101R

TECHNICAL LITERATURE

Contact the Superior Electric office nearest you for Trained Technical Assistance or Engineering Information.

POWERSTAT VARIABLE TRANSFORMERS • VOLTBOX A-C POWER SUPPLIES • STABILINE VOLTAGE REGULATORS

THE SUPERIOR ELECTRIC CO.
BRISTOL, CONNECTICUT

TRAINED ENGINEERING SERVICE IN YOUR TERRITORY

For practical assistance with your voltage control problems, consult the SECO engineer nearest you:

Mr. R. J. Caccavelli
The Superior Electric Company
P. O. Box 48
Oak Park, Illinois
Phone EUclid 6-5898

Mr. H. W. Lorenson
The Superior Electric Company
Room 1118, Fidelity Building
1940 East 6th Street
Cleveland 14, Ohio

Mr. J. C. Van Groos
1436 North Serrano Avenue
Hollywood, California
Phone Hudson 2-7209

Buryl R. Hill Company
19481 James Couzens Highway
Detroit 35, Michigan
Phone Vermont 8-3460

Mr. Fred W. Carlson
2307 Fifth Avenue
Seattle 1, Washington
Phone ELliott 6630

Mr. J. E. Edstrom
519 N. W. Park Avenue
Portland 9, Oregon
Phone Garfield 8631

Mr. Harbert S. Gregory
227 North Peters Street
New Orleans, Louisiana

Mr. T. M. Salisbury
P. O. Box 1085
Jackson, Mississippi
Phone 5-8305

Mr. L. C. Hardie
Box 1491
Des Moines, Iowa

Mr. Paul Williams
341 Hazelwood
San Francisco 12, California

L. R. Ward Company
2711 Commerce Street
Dallas 1, Texas

Mr. John F. Gaumer
1814 Texas Avenue
Houston, Texas
Phone Fairfax 8753

Powertronic Equipment Ltd.
494 King Street, East
Toronto 2, Ontario, Canada

FIG. 1—Basic audio-limiter circuit

supply through V_1 in series with the primary of the audio transformer. Capacitor C_1 completes the audio circuit consisting of the microphone and transformer primary. With no signal into the microphone, the current is set to a given level. The audio signal is stepped up by the transformer to a higher level, which in some cases is sufficient to modulate the transmitter without further amplification. Part of this audio component is amplified by the triode section of V_2 and rectified by the diode, causing a negative voltage to appear at the grid of V_1 proportional to the average audio-signal level entering the microphone. The louder the audio signal, the more negative the bias, consequently, the less current will be supplied to the microphone. Since the output of the microphone is proportional to the direct current through it below saturation, the output is reduced and limiting action obtained. For example, if current is reduced to 5 ma by an audio signal, and the signal increased 20 db, the microphone current will be further reduced to 0.5 ma maintaining constant output.

Audio Amplifier

Since the audio current is not amplified before reaching the modulator tube, there is no chance



FIG. 2—Limiter circuit with audio amplifier

Want to catch a customer's eye?

Little lamps add new appeal—make your product stand out!

Eyes turn to the product with "light appeal". Tiny jewel lights that flash a warning or an "O.K.". Lights that say "here I am" in the dark. Lights that simplify operation, add novelty and give extra safety and convenience!

Whether you're making electronic equipment for industrial use or household products, you'll find General Electric miniature lamps that fit right into your design—give it new appeal at low cost! Complete line of types and voltages—filament or neon glow. And you know you can always depend on G-E lamps for quality and long service.

For assistance in selecting the proper type, consult your nearest G-E lamp district office. Or write General Electric, Nela Park, Cleveland 12, Ohio.

MINIATURE LAMPS

You can put your confidence in—

GENERAL ELECTRIC

CLEVELITE* and COSMALITE*

LAMINATED PHENOLIC TUBING

Those in the Radio and Television Industries know from actual use the fine performance of these Tubes.

They also know that our large production capacity assures them of a dependable source of supply with prompt delivery.

is used also for many other electrical products at a considerable saving where exacting specifications must be carefully followed. For the best . . . "Call Cleveland."

* Trade Marks

Ask us about these spirally laminated paper base phenolic tubes in diameters, wall thicknesses and lengths that will meet your needs.

The CLEVELAND CONTAINER Co.
6201 BARBERTON AVE. CLEVELAND 2, OHIO

PLANTS AND SALES OFFICES at Plymouth, Wisc., Chicago, Detroit, Ogdensburg, N.Y., Jamesburg, N.J.
ABRASIVE DIVISION at Cleveland, Ohio
CANADIAN PLANT: The Cleveland Container, Canada, Ltd., Prescott, Ontario

REPRESENTATIVES

NEW YORK AREA	R. T. MURRAY, 614 CENTRAL AVE., EAST ORANGE, N. J.
NEW ENGLAND	R. S. PETTIGREW & CO., 968 FARMINGTON AVE. WEST HARTFORD, CONN.
CANADA	WM. T. BARRON, EIGHTH LINE, RR #1, OAKVILLE, ONTARIO

The little SHURE cartridges

that fill the Big need

for High Fidelity

Phonograph Reproduction . .

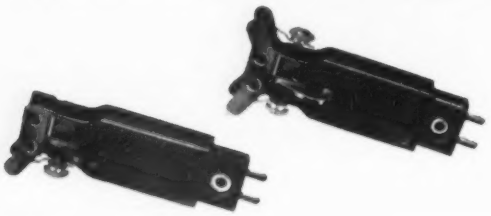

THE NEW SHURE "VERTICAL DRIVE"

CRYSTAL PICKUP CARTRIDGES

Big things often come in little packages . . . So it is with the superlative new Shure "Vertical Drive" Crystal Cartridges. They reproduce *all* the recorded music on the new fine-groove recordings—a reproduction that meets the strict requirements of high compliance and full fidelity. The "Vertical Drive" cartridges are requisite for the critical listener—the lover of fine music. They are especially recommended for those applications where *true fidelity* is essential.

SINGLE MODELS:	W23A for standard width-groove records. W21A for fine-groove records.
TURNOVER MODELS:	W22A and W22AB for both standard and fine-groove recordings.

Unusually highly compliant, these "Vertical Drive" Cartridges will faithfully track standard records with a force of only 6 grams—micro-groove records with a force of only 5 grams (an added protection for treasured recordings). Will fit standard or special mountings. Have more than adequate output for the average audio stage.

SHURE

SHURE BROTHERS, INC.

Microphones and Acoustic Devices

225 WEST HURON STREET, CHICAGO 10, ILL. • CABLE ADDRESS: SHUREMICRO



FIG. 3—Curves show effect of amplifier in limiter circuit

for the introduction of microphonics. If amplification were necessary, it would be done at a high audio level as shown in Fig. 2 and the gain would probably be small. The distortion contributed by this circuit depends on the quality of the transformer and can easily be made negligible. The carbon microphone is left as the only source of noise and distortion. The limiting action is good and curves are shown in Fig. 3.

The attack and decay time is dependent on the time constants of R_1, R_2, C_1 and the diode, and can be adjusted to give satisfactory results. First syllable of a word following a pause will over-modulate. This is not very noticeable and is unimportant to intelligibility.

With phase modulation, it is desirable to limit proportional to frequency as well as the amplitude of the audio signal. This may be done by making a differentiating circuit of R_3 and C_2 which will cause V_1 to amplify the high frequencies more than the low frequencies.

Disguised Antenna Design

TO DISGUISE the transmitting features of the normal police antenna so that it conforms with the appearance and placement of an ordinary car radio aerial, engineers at Ward Products Corporation have designed an antenna whose appearance is identical to that installed on a standard radio-equipped pleasure car. To best accomplish this deception, a standard automotive antenna was modified to give permanent electrical connections at the telescopic joints of the tube assembly.

As a transmitting antenna in 152 to 174-mc use, the 55½-inch whip of

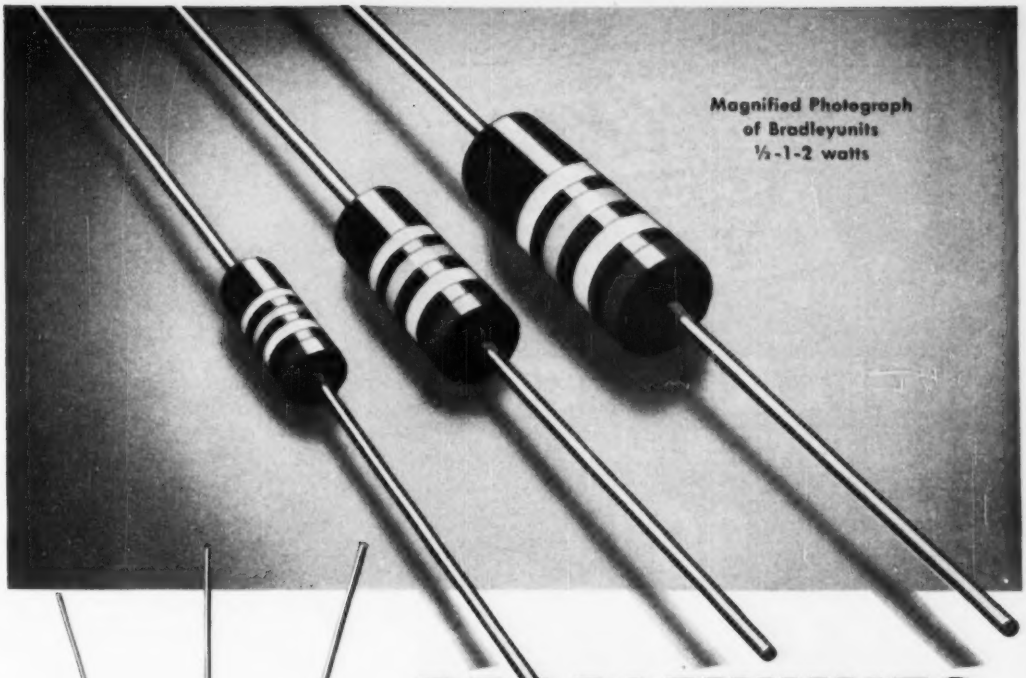

Magnified Photograph
of Bradleyunits
½-1-2 watts

ACTUAL SIZE

Rating	L	D
½ W	3/8"	9/64"
1 W	9/16"	7/32"
2 W	11/16"	5/16"

BRADLEYUNITS

"Tops" in Permanent Performance
. . . *because rated at 70C*

Bradleyunit resistors have permanent characteristics, because they are rated to operate continuously at 70C ambient temperature . . . not 40C. They can withstand extremes of temperature, pressure, and humidity without deterioration.

Bradleyunits are solid molded with high mechanical strength. They need no wax impregnation to pass salt water immersion tests. The leads are differentially tempered to prevent sharp bends.

Bradleyunits are made in standard R.M.A. values in ½ and 2 watt ratings from 10 ohms to 22 megohms; 1 watt from 2.7 ohms to 22 megohms.

Let us send you a complete A-B resistor chart.

Allen-Bradley Co., 110 W. Greenfield Ave.
Milwaukee 4, Wis.



The A-B honeycomb carton prevents tangling of leads and saves time.

A-B

ALLEN-BRADLEY

FIXED & ADJUSTABLE RADIO RESISTORS

Sold exclusively to manufacturers — QUALITY — of radio and electronic equipment

AVOID LOSSES FROM
"NICKING"
Not being an extruded plastic, absolute uniformity of diameter can be guaranteed. Therefore:—
NO NICKING OF CONDUCTORS
NO CONSTANT RESETTING OF BLADES

specify CORNISH

"NOFLAME-COR"
the TELEVISION hookup wire

APPROVED BY UNDERWRITERS LABORATORIES AT 90° CENTIGRADE — 600 VOLTS

Proven BEST, and specified regularly, by leading manufacturers of television, F-M, quality radio and all exacting electronic equipment. For maximum output and minimum rejects. Available in all sizes, solid and stranded. Over 200 color combinations.

PRODUCTION ENGINEERS: Specify "NOFLAME-COR" for absolute uniformity of diameter, permitting clean stripping of insulation without damage to the copper conductor...

NO NICKING OF CONDUCTORS
NO CONSTANT RESETTING OF BLADES

AVOID LOSSES FROM
"BLOBBING"
Not being an extruded plastic, eliminates the costly "blobbing" of insulations under soldering heat

- Flame Resistant
- High Insulation Resistance
- Heat Resistant
- Facilitates Positive Soldering
- High Dielectric
- Easy Stripping
- Also unaffected by the heat of impregnation — therefore, ideal for coil and transformer leads

COMPLETE DATA AND SAMPLES ON REQUEST

"made by engineers for engineers"

CORNISH WIRE COMPANY, Inc.

605 North Michigan Avenue, Chicago 11 — 15 Park Row, New York 7, N. Y. — 1237 Public Ledger Bldg Philadelphia 6

MANUFACTURERS OF QUALITY WIRES AND CABLES FOR THE ELECTRICAL AND ELECTRONIC INDUSTRIES



FIG. 1—Dimensions for the stub and line to load the antenna at frequencies from 24 to 50 mc are given in the text

the new antenna operates as a $\frac{1}{4}$-wavelength antenna and adjusting or loading the antenna is not necessary. However, it is advantageous to bring the Ward SPPB71 antenna as close as possible to the corner post of the windshield. The antenna then operates as an apparent J with the corner post acting as the $\frac{1}{4}$-wave-length grounded leg. The normal output circuit of commercial transmitters will load to the antenna without difficulty.

For 25 to 50-mc services, the antenna is basically short and it is necessary to load the antenna with a simple stub arrangement to obtain minimum standing wave ratio. The diagram of Fig. 1 illustrates the most convenient loading method.

The basic theory of the loading method is that an antenna less than a $\frac{1}{4}$ wavelength long presents an impedance at its base of $R - jX$ which varies as shown in Fig. 2.

A $\frac{1}{4}$-wavelength antenna impedance is thus approximately 15-j100. Connecting a transmission line of $Z_o = 52 + j0$ (RG-8/U) or $53.5 + j0$ (RG-58/U) ohms to the antenna will result in a mismatch and improper loading of the transmitter.

A shorted transmission line stub B less than a quarter wavelength long presents a pure inductive reactance of $0 + jX_s$ ohms. In the SPPB71, moving along the trans-



FIG. 2 Variation of impedance at base of antenna as a function of its length

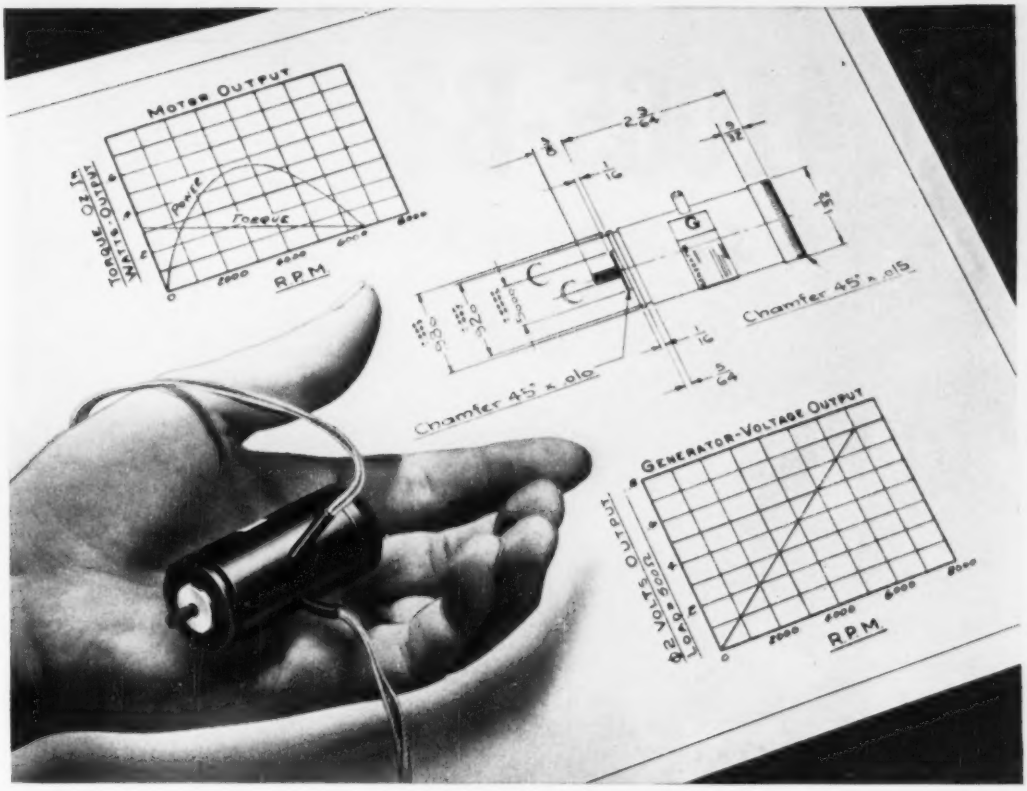

Remarkable new compactness in precision control

The extreme compactness of the new Type 1623 Motor-Driven Induction Generator has been achieved with no sacrifice of general performance characteristics. Like its "bigger brothers" in the Kollsman line, the Type 1623 combines, in a single frame, motors of high torque/inertia ratio with generators offering *linear voltage vs. speed* over a wide range.

Where size and weight are prime considerations, this 4.2-ounce unit will prove the solution to many precision control problems. Separate induction motors and generators are also available in the same diameter frame.

For further information on the 1623 and others in the complete Kollsman group of miniature special purpose AC motors—or if you require a unit to your own specifications—write: Kollsman Instrument Division, Square D Company, 80-08 45th Avenue, Elmhurst, N. Y.

Type 1623 Motor-Driven Induction Generator

Motor characteristics: Maximum torque at stall—smooth-running (will not "cog")—fast-reversing—operates from two-phase source, or from single-phase with phase-shifting condenser—available for 60 or 400 cycle operation.

Generator characteristics: Low residual voltage and voltage "spread"—constant frequency output—amplitude directly proportional to speed.

Unit characteristics: Both rotors mounted on same shaft, assuring positive alignment—stainless steel housing—hardened beryllium copper shaft—corrosion-resistant nickel steel laminations—high temperature insulation (up to 200° C. total temperature)—stainless steel precision ball bearings—weight: 4.2 ounces.

KOLLSMAN INSTRUMENT DIVISION

SQUARE D COMPANY

ELMHURST, NEW YORK GLENDALE, CALIFORNIA

"U.S.A.F.

No. 41065-B?

IT'S A SNAP WITH A TENNEY TEST CHAMBER"

This Tenney variable temperature chamber was designed and built to run environmental tests for high and low temperature (Group 10 & 20), on electronic equipment components, in accordance with 41065-B. Specified range from −103 °F. to +200 °F. Sizes from 3 cu. ft. to walk-in rooms.

Thanks to a long, solid background of building test equipment, Tenney chambers more than meet the toughest government and industrial specifications. Explosion, altitude, mildew resistance, humidity, salt spray tests . . . all these and many others are precision-controlled with standard Tenney equipment. Combinations of basic units meet complex requirements. Tenney program control provides the automatic means for close regulation of changing conditions. Tenney's engineering staff is always available for consultation and help. Literature and further information upon request. ***Write to Tenney Engineering, Inc., Dep't. A, 26 Avenue B, Newark 5, New Jersey.***

Tenney

Engineers and Manufacturers of Automatic Temperature, Humidity and Pressure Control Equipment

7182



FIG. 3—Variation of R and X along the transmission line

mission line from the antenna, the values of R and X_L, looking toward the antenna, vary as shown in Fig. 3.

At some point on the line (for example $A = 0.2$), the resistive component of the impedance is equal to the characteristic impedance of the transmission line. At this point, stub B is connected to cancel out the capacitive reactance of the line. In this way the total reactance is brought to zero. From this point, looking toward the antenna, we see an impedance of $52 + j0$ ohms after connecting the stub. Therefore a transmission line connected to the stub network will see a good match with maximum energy transfer.

The following table gives the required lengths for cables A and B of Fig. 1.

Loading Chart

Freq in Mc	A in inches	B in inches
24	60	0
25	56½	0
26	52	0
27	50½	0½
28	47½	0½
29	45	0½
30	42½	0½
31	40	0½
32	38	0½
33	35½	0½
34	33½	0½
35	31½	0½
36	29	0½
37	27	0½
38	25	0½
39	23½	0½
40	21½	0½
41	19½	0½
42	17½	0½
43	15	0½
44	13	0½
45	12½	0½
46	10½	0½
47	8½	0½
48	6½	0½
49	3½	0½
50	1	0½

The output circuits of commercial transmitters will load to the antenna without difficulty.

The polar plot of the antenna radiation pattern indicates the SPPB71 pattern is more nondirectional than the rear or bumper mounted ¼ wavelength whip and less nondirectional than the roof top mounted ¼ wavelength whip.

IMPROVED COUNTING RATE METER FOR CONTINUOUSLY MONITORING RADIO-ACTIVE MATERIALS

- **RESPONSE CONTROL:** 4-position switch gives equilibrium time from 2 or 3 minutes to one second
- **NEWLY DESIGNED PRE-AMPLIFIER:** in small cylindrical anodized aluminum case; easy decontamination; long cable may be used; case equipped with tripod-type mounting thread **(bench-top mount in photo is accessory sold separately)**
- **NEW QUENCHING CIRCUIT** operates with self-quenching or non-self-quenching counter tubes
- **GREATLY INCREASED SENSITIVITY:** counting rate meter sensitivity increased four-fold; now responds to ¼-volt pulses
- **PANEL JACK TERMINALS** for 5 ma pen recorder providing continuous picture of what happens while radio-active material is being monitored; in absence of operator will show variations in the activity of materials being measured
- **AURAL MONITOR:** small, built-in loudspeaker, with volume control for aural monitoring
- **ADJUSTABLE VOLTAGE ON COUNTER CIRCUIT,** continuously variable from 400 to 2,000 volts (also available at terminals at rear of panel), with accurate voltage indication
- **VERY WIDE RANGE:** 5 to 20,000 counts per minute, full-scale values of 200, 600, 2000, 6000 and 20000; meter direct-reading in counts per minute on *all* scales
- **GOOD ACCURACY:** ±3% of full scale on all ranges
- **COUNTER TUBES** not supplied with instrument; beta- and gamma-ray tubes available; tubes plug into probe cylinder

TYPE 1500-B COUNTING RATE METER . . . $495.00

GENERAL RADIO COMPANY Cambridge 39, Massachusetts

90 West St., New York 6 · 920 S. Michigan Ave., Chicago 5 · 1000 N. Seward St., Los Angeles 38

PRESTO... *most carefully made recording discs in the world*

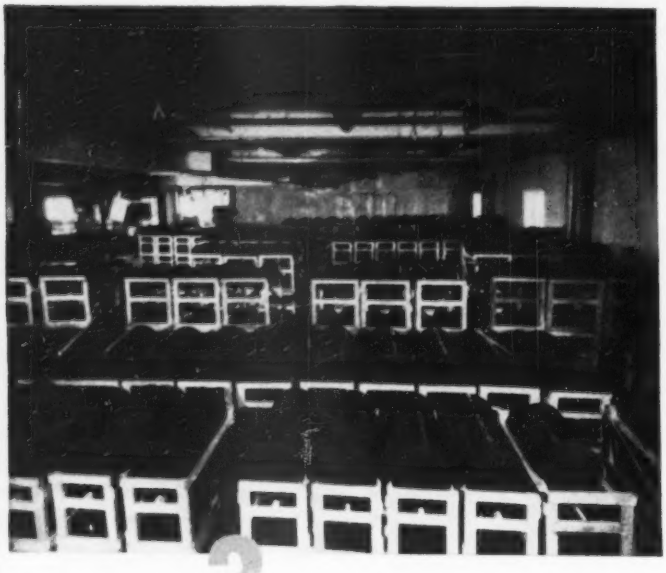

step 3-the "Curing" process

Like fine wine, recording discs must be correctly and naturally aged. Without aging, lacquer surfaces will not engrave properly, and will result in muddy, low fidelity reproduction.

At the PRESTO disc plant, thousands of discs are allowed to "cure" under constant temperature in a dust-free atmosphere. Not one disc is allowed to leave the plant until it has been fully matured for a specified period. At PRESTO, this process is never hurried by baking or forced methods.

Careful, unhurried curing is another reason for the superiority of PRESTO discs... known throughout the world as the most carefully-made, most permanent, best performing discs available.



The famous PRESTO "Green Label" . . . world's finest recording disc.

PRESTO
RECORDING CORPORATION
Paramus, New Jersey
Mailing Address:
Box 500, Hackensack, New Jersey

In Canada:
Walter P. Downs, Ltd.
Dominion Sq. Bldg.
Montreal, Canada

Overseas:
M. Simons & Son Co., Inc.
25 Warren Street
New York, New York

THE ELECTRON ART

(continued from p 126)

Eighth Semi-Annual Report of the Atomic Energy Commission.

Ordinary tv reproduces width and height clearly but gives poor perception of depth, the report states. To overcome this handicap, stereoscopic television makes use of the same principle embodied in binoculars and the stereoscope.

In the Argonne stereo-tv system, the camera has twin lenses set approximately eyes-width apart, which pick up slightly different images on the screen. The single picture consisting of two images is then handled through the camera in conventional fashion, transmitted by coaxial cable and reconstructed in the receiver.

The original model receiver projected the images side by side on a single picture tube. Ninety-degree-opposed polarizing filters were mounted on the halves of the tube face and the two images were viewed through spectacles polarized in the same 90-degree pattern and fitted with prisms. An improved system developed a little later uses twin receivers with picture tubes pointing together at right angles. The electronic impulses for both images flow into each receiver but the controls are set to project only the right-eye image on one tube, only the left-eye image on the other. The two picture tubes are equipped with polarizing filters, and a half-silvered mirror bisects the right angle between them.

A person looking at the mirror sees the reflected image from one tube superimposed on the transmitted image from the other. With the naked eyes, the resultant single picture is flat and blurred. With properly polarized spectacles, the blurring disappears and the result is a clear picture in which differences of depth are vivid.

Positive Gate Counter Circuit

By A. G. Ratz
Computation Center
McLennan Laboratory
University of Toronto
Toronto, Canada

IN APPLICATIONS demanding extreme reliability, conventional counter circuits do not always meet requirements. The type of counter described here is less sensitive to variations in circuit values

an industry as changeable as a cloud . . .

a more than a billion-dollar-a-year industry — never still, never settling into predictable patterns . . . **electronics**

WHY . . .

Because of engineering's never ceasing search for improvements . . . to old products reducing the number of tv set components for example . . . by new applications of old products such as flexible shafting . . . in designs creating new products like magnetic recorders. Improvements requiring new products, components, materials . . . improvements making new markets . . . improvements in practice, principles and products . . . are what make electronics as an industry as changeable as a cloud and keep it from settling into predictable patterns.

THE . . . V . . . SYMBOL

that makes the GUIDE better — more accurate

This symbol appears, in much smaller size of course, before each manufacturer's listing in the BUYERS' GUIDE when evidence has been received that: The product is in production; is available within a reasonable time; is unrestricted for general industrial use. It's a user-designed and demanded symbol for speeding up their BUYERS' GUIDE purchasing process.

Manufacturer appreciation of its value to the users is evidenced by the record volume of advertising placed by them in the 1950-51 ELECTRONICS BUYERS' GUIDE — the first to feature V

Make plans now to drive sales home in next year's nineteen fifty-one/two, better pulling V *— powered ELECTRONICS BUYERS' GUIDE. Budget for it NOW.*

***But* . . . YOU DON'T HAVE TO GO UP IN THE AIR,** fly all over the place and buy blue sky to get your share of that billion. The industry's buying pattern is consistent and predictable. Electronic design engineers, down from their flights of imagination and at their breadboards ready to buy, have a down-to-earth purchasing procedure.

THEY DIG for technical facts on product specifications and product sources — facts which they must know in order to make their designing and purchasing decisions. And where do they dig for those vital facts? In just one place . . . the most complete and accurate source of such information available . . . the time-proven, ten-year-old

ELECTRONICS BUYERS' GUIDE

It's as simple as the old "one-two" for the seller, *and easier.* The Guide delivers the "first punch." It directs their attention to your company. Your advertisement, to which the product listings will direct buyers, will deliver the "second" . . . the one that makes the sale.

WHAT YOU CAN DO: Remember that these men are your electronics sales targets — the back-in-the-plant engineers . . . drafting board and breadboard, developing, testing, production line and control engineers . . . the men who design, manufacture and use electronic products. What these men are doing and planning at this very moment is shaping the future of electronics, perhaps of your products. They are the men who make and alter electronic markets.

AND THIS IS HOW to insure that they remember you: By down-to-earth, shirt-sleeve selling advertising in ELECTRONICS annual BUYERS' GUIDE issue, the reference book used by the men in this fast moving field for quick, accurate and complete product information. So be sure that your fifty-one/two ELECTRONICS BUYERS' GUIDE product listings pack a sales-delivering "punch" by providing NOW in your 1951 budget for sufficient, supporting, informative, product-descriptive advertising.

electronics

BUYERS' GUIDE

A McGRAW-HILL PUBLICATION

330 West 42nd Street • New York 18, N.Y.

CHICAGO Transformer Best Sellers worth knowing about!

Here are the quick facts on a number of the most popular industry-specified CHICAGO Transformers. Featuring famous Sealed-in-Steel construction, these units offer designers higher product acceptance, long-life dependability, improved performance and desirable appearance. These units are typical of CHICAGO *preferred* design.



PLATE AND FILAMENT TRANSFORMERS

Catalog No.	High Voltage A.C Volts	Secondary D.C Ma.	Secondary D.C V. Output	Rectifier Volts	Rectifier Amps	Filaments No. 2 Volts	Filaments No. 2 Amps	Filaments No. 3 Volts	Filaments No. 3 Amps
PCC-55	270-0-270	55	260	5	2	6.3 CT	2		
PCR-55	350-0-350	55	260	5	2	6.3 CT	2		
PSC-105	345-0-345	105	320	5	2	6.3 CT	3.5		
PCC-105	345-0-345	105	320	5	2	6.3 CT	3.5		
PCC-120	375-0-375	120	380	5	3	6.3 CT	4		
PSR-300	550-370-75-0-75-370-550	300	420	5	6	6.3 CT	5	6.3 CT	1

FILAMENT TRANSFORMERS

Catalog No.	Secondary Volts	Secondary Amps	Insulation Volts RMS
F-65	6.3 CT	5.5	2500
F-610	6.3 CT	10	2500

PUBLIC ADDRESS RANGE OUTPUT TRANSFORMERS

Catalog No.	Typical Output Tubes	Class	Impedance Primary-Secondary	Max. D-C in Pri.	Power Level
PCO-150	P.P 6V6's, 6F6's	AB	Pri. 10,000 ohms CT Sec. 600-150-16-8/4 ohms*	200 ma.	15 watts
PCO-200	P.P 6L6's	B	Pri. 6,000 ohms CT Sec. 600-150/16-8-4 ohms*	230 ma.	30 watts

*Has tertiary winding to provide 10% inverse feedback.

THE SEALED-IN-STEEL LINE—CHOICE OF ENGINEERS

WRITE FOR COMPLETE CATALOG

Have the full details at your fingertips on CHICAGO'S *New Equipment Line*—the line that offers transformer engineering geared to *today's* trends in circuit design. Write for your free copy of this important catalog today or get a copy from your distributor.

NOW
QUICK SERVICE FROM STOCK ON
JAN-T-27
Hermetically Sealed Units

CHICAGO TRANSFORMER
DIVISION OF ESSEX WIRE CORPORATION
3501 ADDISON STREET • CHICAGO 18, ILLINOIS

and properties of trigger pulses. Its maximum speed is limited only by stray capacitance. The counter was developed especially for use in high-speed electronic computers, an application where accuracy of computing demands circuits of exceptional reliability. At the same time, the counter is sufficiently versatile to be adapted to other uses.

Basic Circuit

The Eccles-Jordan trigger circuit shown in Fig. 1A can be converted into a counter. The block diagram, Fig. 1B, shows the essential parts of a counter circuit. Voltages at points P_1 and P_2 control the gates, G_1 and G_2. Depending upon the state of the flip-flop, only one of these gates lets the trigger pulse pass. Flip-flop inputs are designated Q_1 and Q_2.

A conventional counter is shown schematically in Fig. 1C. Points P_1 and P_2, Q_1 and Q_2 coincide at the grids of V_1 and V_2 respectively.

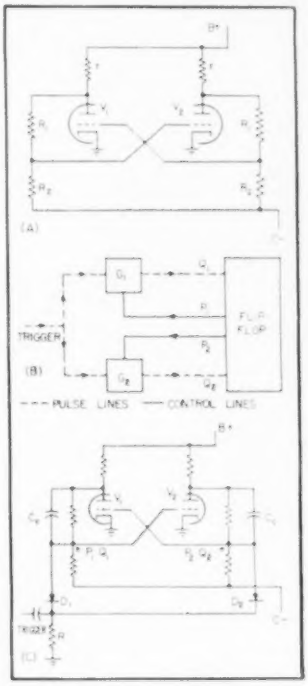

FIG. 1—Basic flip-flop (A) may be used in counter circuits (B). Diodes provide gating action in conventional grid-triggered circuit (C)

The Light

THAT MUST NOT FAIL

Automatic Airway Beacon Controlled by Telechron Timing Motor

Today's modern airfields leave nothing to chance. Airway beacons and airstrip lights flash on *automatically* at the first approach of dusk. Whether "dusk" occurs in mid-afternoon or at its duly appointed time, pilots need not fear for proper guidance while in flight. Lights respond to pre-determined light levels and function the instant they are needed.

Weston illumination controls permit this uniformly reliable regulation of lighting. Independent of human judgment or arbitrary light schedules, it is a great advance in aviation safety. These controls owe their dependability to Telechron Timing Motors — also used in aircraft instruction markers, street lighting and industrial lighting.

Instantly, constantly synchronous, Telechron Timing Motors give dependable performance every time.

Timing On Your Mind?

If you have a timing problem to contend with, a Telechron application engineer can be of great help to you. Backed by broad field experience, he can lead you to important savings in time and money. Consult him early in your planning. For immediate facts, send coupon below. TELECHRON INC. A General Electric Affiliate.

Telechron®

ALL TELECHRON TIMING MOTORS ARE

INSTANTLY...CONSTANTLY SYNCHRONOUS

TELECHRON INC.
40 Union Street
Ashland, Massachusetts

Please send me information on sizes and types of Telechron Synchronous Motors. My possible application is:

Instruments	☐	Communications Equipment	☐
Timers	☐	Other (please fill in)	
Electric Appliances	☐	.....	
Cost Recorders	☐	.....	
Advertising, Display Items	☐	.....	
Juke Boxes	☐	.....	
Air Conditioning & Heating Controls	☐	.....	
		☐ Please send new Catalog	

NAME .....

COMPANY .....

ADDRESS .....

CITY ..... ZONE .....

STATE .....

B&W

Coil Manufacts*

- Single layer solenoid coils
- Universal wound coils of single, multiple pie, and progressive construction
- RF, IF, and Oscillator Coils
- Traps, Discriminators, Filters, RF and Delay Line Chokes

These are but a few of the many types of coils designed and built by B&W to answer your specific needs.

Whether your problems concern research, design, development, or production . . . in electronics, television, radio broadcasting, or radio communications . . . for long or short production runs—to exacting commercial or military specifications—you'll find the complete facilities of B&W able to answer your coil problems.

For detailed information on coils that are recognized the world over for their consistent dependability, write today to B&W, Dept. EL-110.

*Manufacts—manufacturing facts

BARKER & WILLIAMSON, INC.

237 Fairfield Avenue Upper Darby, Pa.

Diodes D_1 and D_2 represent gates G_1 and G_2.

When the flip-flop changes state, the diodes interchange roles. Unless the trigger pulse is very short, this interchange can occur within the time the pulse is applied causing the pulse to affect the opposite side of the counter from that originally intended.

Cross-coupling capacitors C_c are added to make sure that a change of state actually occurs. Their charging time constants are made considerably longer than the pulse duration and counter speed is limited by the time required to recharge these capacitors.

Although there are other refinements which offer some improvement over the circuit in Fig. 1C, this example shows the basic weaknesses of all conventional counter circuits.

Triggering

Usually the triggering waveform originates in a high-impedance circuit. Circuits such as Fig. 1C, however, require that the trigger be supplied from a source of low impedance. Strictly speaking, the circuit needed to provide the necessary impedance transformation should be regarded as an integral part of the counters. While the new counters may at first appear to require more tubes than conventional circuits, it is easy to arrange a high-impedance input using no extra components.

The simplest, though not the fastest of the new counters is shown in Fig. 2A. The principle parts of G_1 and G_2 are made up of the double triodes V_1 and V_2 respectively. A positive pulse superimposed on the correct d-c level triggers the counter.

If the circuit of Fig. 2A is one of a series of identical counters arranged to make up a divider of 2^n where n = the number of units in series. The trigger input is directly connected to the appropriate plate of the previous stage. The high input impedance of the cathode followers eliminates any possibility of interaction.

The potential at the plate of the conducting tube of each unit is +50 volts; that at the plate of the nonconducting tube is +120 volts. Thus, depending upon the state of

THE ONE 3-INCH TUBE

combining these modern features

where both size and performance count

Here is the modern achievement in a compact, three-inch cathode-ray tube providing the brilliant, "hair-line" trace long desired for best performance of portable oscillographs and industrial cathode-ray monitoring devices.

With performance at the highest premium, the special features of the DuMont Type 3RP-A have been combined to make high sensitivity compatible with short overall length; and to obtain a fine trace free from the distortions usually found in short tubes as sensitive as the Type 3RP-A.

Because of the new, ingenious design of the vertical deflection plates of the Type 3RP-A, the position of the cathode-ray beam does not affect deflection sensitivity, thereby substantially eliminating pincushioning and trapezoidal distortions.

New production techniques are applied for the first time to the commercial production of three-inch cathode-ray tubes to obtain a flat face which provides more usable screen area, eliminates parallax distortion, and carries through the high performance standard set by the advanced design of the Type 3RP-A electron gun.

COMPACT DESIGN . . .
Maximum length of 9⅛ inches *plus* high sensitivity.

BALANCED DEFLECTION . . .
For uniform spot focus maintained over the entire trace.

CURVED DEFLECTION PLATES . . .
For uniform deflection sensitivity.

FLAT FACE . . .
For more usable screen area with minimized parallax distortion.

"HAIR-LINE" TRACE . . .
Provided by small spot and fine focus.

Electrical Data

Heater Voltage	6.3 Volts
Heater Current	0.6 ±10% Ampere
Focusing Method	Electrostatic
Deflecting Method	Electrostatic
Phosphor	P1
Fluorescence	Green
Persistence	Medium

Typical Operating Conditions

For Anode No. 2 Voltage of	1,000	2,000 Volts
Anode No. 1 Voltage for focus	165 to 310	330 to 620 Volts
Grid No. 1 Voltage	−22.5 to −67.5	−45 to −135 Volts
Deflection Factors:		
D1D2	73 to 99	146 to 198 Volts D-C per Inch
D3D4	52 to 70	104 to 140 Volts D-C per Inch
Anode No. 1 Voltage for focus	16.5% to 31% of Eb2 Volts	
Grid No. 1 Voltage	2.25% to 6.75% of Eb2 Volts	
Anode No. 1 Current for any operating condition	−15 to +10 Microamperes	
Spot Position (Undeflected)	Within 15 Millimeters square	

DUMONT
for
Oscillography

© ALLEN B. DU MONT LABORATORIES, INC.

ALLEN B. DUMONT LABORATORIES, INC. INSTRUMENT DIVISION, 1000 MAIN AVENUE, CLIFTON NEW JERSEY

(1) 3J 160E

Filament
10 volts 29 amp

Ratings
Va 3 kV
Ia 1 amp
Wa 1 kW
Max. frequency 120 Mc/s. Overall diameter 2.5 ins. Max. height 5.2 ins.

(2) 3J 260E

Filament
10 volts 80 amp

Ratings
Va 11 kV
Ia 5 amp
Wa 20 kW
Max. frequency 30 Mc/s. Overall diameter 8.031 ins. Max. height 15.125 ins.

(3) 3J 192E

Filament
5 volts 66 amp

Ratings
Va 7 kV
Ia 2 amp
Wa 4.5 kW
Max. frequency 22 Mc/s. Overall diameter 5.875 ins. Max. height 8.750 ins.

(4) 5J 180E

Filament
10 volts 28 amp

Ratings
Va 6 kV
Ia 1.5 amp
Wa 3.5 kW
Max. frequency 25 Mc/s. Overall diameter 5.875 ins. Max. height 8.750 ins.

Standard Thoriated Tungsten Valves

Incorporating thoriated tungsten filaments, and requiring low filament power, these valves are air-blast cooled and facilitate the design of simpler, smaller radio equipment.

Standard Telephones and Cables Limited

(An I.T. & T. Associate)

Radio Division, Oakleigh Road, New Southgate, London, N.11, England

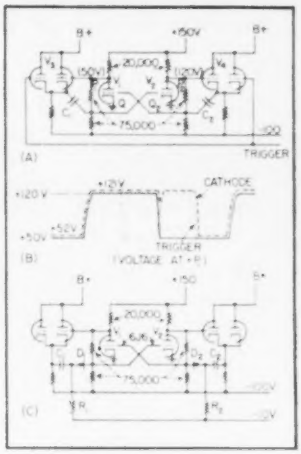

FIG. 2 — Positive-gate counter (A) waveforms indicate circuit operating points. Slight modification of basic circuit (C) permits high-speed operation

the unit to which the trigger line is connected, the input potential is either +50 volts or +120 volts.

The counter is triggered when the previous unit changes state to produce at the input a positive waveform changing from +50 volts to +120 volts. Since the cathode potentials of the cathode-follower gates made up of V_3 and V_4 are always slightly more positive than the most positive grid, as shown in Fig. 2B, the trigger pulse reaches only one side of the flip-flop. For instance, suppose V_1 is conducting, then P_1 is at +50 volts, P_2 at +120 volts. If the trigger input voltage is +50 volts, the cathode of V_3 has a potential of +52 volts; that of V_4 +121 volts. When the input potential changes from +50 volts to +120 volts, the cathode potential of V_3 rises to +121 volts. This transition is transferred through C_1 to Q_1. Since V_4 cathode is already at +121 volts, no pulse reaches Q_1.

The positive pulse reaching Q_2 permits V_2 to conduct, and the flip-flop changes state. Thus the voltage at P_1 rises to +120 volts and that at P_2 drops to +50 volts. The positive transient at P_1 can only assist the trigger pulse in causing V_1 to conduct. The only possible effect of the negative transient at P_2 is to help render V_2 non-conducting, although this may be partially or even completely masked by the rising potential at the trigger in-

ELECTROLYTIC CONDENSERS at The Magnavox Co., Fort Wayne, Ind., are wrapped for dipping with the new high purity "SCOTCH" Electrical Tape No. 42.

WHAT'S NEW IN TAPE?

New high purity tape, 3 years in development, cuts condenser breakdowns

At last, after three years of research, a condenser wrap that doesn't cause corrosion and breakdowns! It's the 3M Company's new "SCOTCH" Electrical Tape No. 42—a tape with extremely low chloride content, designed specifically for condenser construction.

Usual methods of wrapping condenser rolls for dipping caused frequent failures. Now this new low chloride content tape won't bring on electrolyte contamination or electrolytic corrosion. Tensile strength: 20 pounds per inch of width. Adhesion strength: 45 ounces per inch of width.

"SCOTCH" Electrical Tape No. 42 is only one of a big family of "SCOTCH" Electrical Tapes that can crack tough problems for you. Write to Dept. ES-115 for full information.

Quick facts about "SCOTCH" Electrical Tape No. 42

- NON-CORROSIVE—low chloride content, won't cause breakdowns.
- TENSILE STRENGTH—20 pounds per inch of width.
- ADHESION STRENGTH—45 ounces per inch of width.
- THIN CALIPER—holds condenser roll snugly in place.

Made in U. S. A. by MINNESOTA MINING & MFG. CO., St. Paul 6, Minn.

also makers of other "Scotch" Brand Pressure-Sensitive Tapes, "Scotch" Sound Recording Tape, "Underseal" Rubberized Coating, "Scotchlite" Reflective Sheeting, "Safety-Walk" Non-Slip Surfacing, "3M" Abrasives, "3M" Adhesives.

General Export: DUREX ABRASIVES CORP., *New Rochelle, N. Y.* • *In Canada:* CANADIAN DUREX ABRASIVES LTD., *Brantford, Ontario*

FUSES

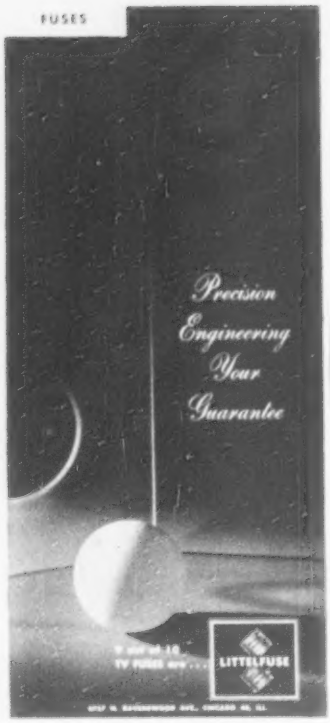

HICKOK

LONG SCALE METERS

HICKOK 250° long scale arc — 100° scale conventional meter

Easier to read accurately

The improved HICKOK meter scale is 2½ times longer than conventional meters to provide faster, more positive readings. Panel size 250° meters, pioneered by HICKOK, fit a smaller space, can be more easily read.

Accuracies to 1% of full scale reading! Available in popular AC or DC ranges. Case widths and diameters, 2½" to 5½". In reply kindly give details of your requirements.

THE HICKOK ELECTRICAL INSTRUMENT CO.
10527 DUPONT AVE. • CLEVELAND 8, OHIO
Highest Quality Electrical Meters Since 1910

put as seen in Fig. 2B. Thus changes in the potentials controlling the gates can be beneficial only.

The counter is not upset when the trigger potential returns to +50 volts. Only the output of that gate controlled by the plate potential of the conducting tube of the flip-flop is affected, permitting the negative transient to reach the grid of the nonconducting tube. This of course, does not upset the flip-flop. The wave form at the cathode of V_1 for a complete cycle is shown in Fig. 2B.

Operation

The maximum speed of the counter of Fig. 2A is determined by the time required to recharge C_1 and C_2. There is a minimum value for which these capacitors are effective. This value is determined by the input capacitances of the flip-flop tubes. The addition of R_1 and R_2 in Fig. 2C allows the time-constants associated with C_1 and C_2 to be equal to or less than those due to the stray capacitances in the circuit. The germanium diodes D_1 and D_2 prevent R_1 and R_2 from upsetting the flip-flop.

The circuit can be further speeded up by decreasing the transition time of the flip-flop. Small cross-coupling capacitors similar to those of Fig. 1C can be added to decrease the a-c impedances coupling the plates to the grids. Clipping diodes at the plates and grids of the flip-flop will also help. The substitution of pentodes for triodes decreases the input capacitances of the flip-flop grids.

The circuit of Fig. 2A operates reliably up to a speed of 500 kc and that of Fig. 2C up to 750 kc. Using cross-coupling capacitors of value 10 $\mu\mu$f, the latter operated reliably at over 2 mc. A substitution of two 6AK5 pentodes for the 6J6 double triodes shown in Fig. 2C increases the speed of operation to over 5 mc. In all cases, the speed is limited by the transition time of the flip-flop.

There are several alternative schemes that can be used for designing the gates G_1 and G_2 other than the circuits of Fig. 2A, and 2C. Some of these involve slight modifications of the circuits shown. Others are completely different: for

SELENIUM RECTIFIERS

MINIATURE TYPE

65 to 1,000 ma.
To 160 v. R.M.S.



In half wave or doubler circuits.

FOR ELECTRONIC APPLICATIONS.

Ask for Bulletins 15-1249, RN-949

HIGH VOLTAGE TYPE

RATINGS TO 100 KV. 1 to 75 ma.

In Phenolic, Glass or Hermetically Sealed Assemblies.

POWER TYPE



RATINGS TO 250 KW.

EFFICIENCY TO 87%

Ask for Bulletins C-349, C-848.

YOUR INQUIRY IS INVITED

INTERNATIONAL RECTIFIER CORP.
6809 S. Victoria Ave.
LOS ANGELES 43, CALIFORNIA

TWIN LEAD, TELEVISION

LIGHTNING ARRESTER

APPROVED for OUTDOOR-INDOOR Use
Protects Television Sets Against Lightning and Static Charges

$2.25

Twin Lead

JFD SAFE TV GUARD

Simple to install everywhere and anywhere ...no stripping, cutting or spreading of wires. More than 300,000 in use today!

SEE YOUR JOBBER OR WRITE TO

JFD MANUFACTURING CO., Inc.
6127 16th Avenue, Brooklyn 4, N. Y.
First in Television Antennas & Accessories

The New ML-2C39A*...

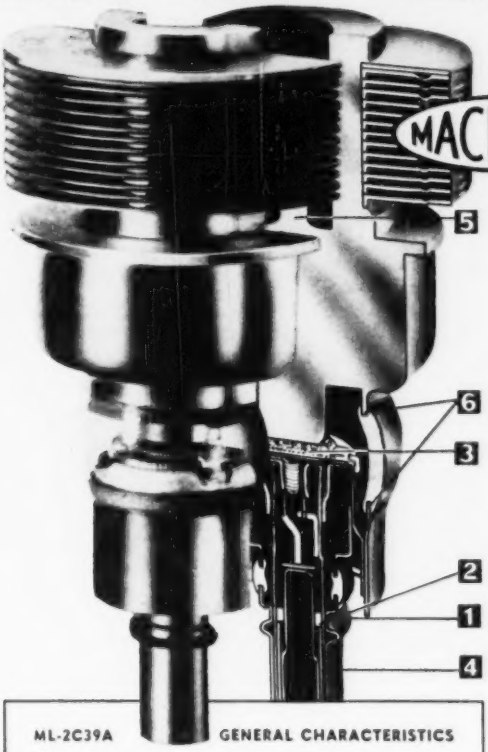

Proving once again that MACHLETT ..makes the Difference

1. Design of cathode lead for positive adjustment and control of transconductance; limits are 20,000-23,000 μmhos or only 25% of permissible specified range.

2. High temperature ceramic in hot cathode end eliminates danger of gas evolution from glass at high temperatures. Assures better protection under overload conditions.

3. Uniquely processed mesh grid assures greater frequency stability with variation in grid dissipation.

4. Gold over silver plating to maintain optimum surface conductivity even in corrosive atmospheres.

5. Machlett's high vacuum processing for good cathode activation and freedom from gasiness.

6. Stronger glass-metal seals. Less breakage inserting and removing tubes.

* *Conforms with recently issued JAN specifications.*

ML-2C39A GENERAL CHARACTERISTICS

Electrical

Cathode: Coated Unipotential

Heater Voltage	6.3 volts
Heater Current	1.0 amperes
Amplification Factor (Average)	100

Direct Interelectrode Capacitances (Average)

Grid Plate	1.95 μμfd.
Grid Cathode	6.50 μμfd.
Plate Cathode	0.035 μμfd.
Transconductance (i_b = 70 ma., E_b = 600 v.) (Average)	23,000 μmhos

Radio Frequency Power Amplifier
Class-C FM Telephony or Telegraphy
(key-down conditions, 1 tube)

Maximum Ratings

D-C Plate Voltage	1000 max. volts
D-C Cathode Current	125 max. ma.
D-C Grid Voltage	−150 max. volts
Peak Positive R-F Grid Voltage	30 max. volts
Peak Negative R-F Grid Voltage	−400 max. volts
Plate Dissipation	100 max. watts
Grid Dissipation	2 max. watts

ML-381 FOR PULSED APPLICATIONS

Maximum Ratings (Tentative)

e_p, peak	3500 volts
i_p, peak	4.5 amps
i_g, peak	2.0 amps
I_p, ave	30 MA
I_g, ave	15 MA
T, pulse length	5 μ sec.
duty	1%
E_f	5.5 volts ± 5%

In all other respects the ML-381 is electrically and mechanically interchangeable with the 2C39A.

"Look to the Tube Specialist"

Long experience in the development and manufacture of the 2C39A electron tube has given Machlett Laboratories a comprehensive understanding of the operating problems encountered in a wide variety of applications of this tube type.

For assistance on your specific problem, write to Machlett Laboratories or contact your local Graybar office.

Distributed by GraybaR

MACHLETT — OVER 50 YEARS OF ELECTRON TUBE EXPERIENCE

Timing Ideas

A BEAR FOR PUNISHMENT



IF you're looking for a rugged, heavy duty interval timer, this Haydon® unit will save you time and money. It will meet every test for stamina, dependability and efficiency; is designed as a versatile, multi-purpose unit. Whatever your need for an interval timer may be, see the Haydon Series 8006 first.

CHECK THESE 8006 FEATURES

1. Standard models for intervals of 1, 15, 60 and 180 minutes; dial and knob optional. **2.** Other models for intervals up to 24 hours or more are available, without dial or knob. **3.** HOLD feature furnished if wanted. **4.** Heavy duty switch is rated 28A, 250 VAC; 1 HP 250 VAC. **5.** Heavy contact pressure; ample follow-through is assured. **6.** Snap action device gives quick, positive break. **7.** Removable dust cover for timer; totally enclosed motor. **8.** Settable in either direction, to start or when operating. **9.** May be used under conditions of high temperature and humidity.

ALL HAYDON TIMING DEVICES GIVE YOU

these advantages of the dependable Haydon Motor: Total enclosure — Very small size — Slow (450 rpm) rotor for long life, quiet operation — Controlled lubrication with separate systems for rotor and gear train — Mounting and operation in any position.

® TRADE MARK REG. U.S. PAT. OFF.

For complete design and engineering specifications, write for catalog: Timing Motors No. 322 — Timers No. 323 — Clock Movements No. 324. Yours without obligation.

HAYDON AT TORRINGTON

HEADQUARTERS FOR TIMING

HAYDON Manufacturing Co., Inc.

2435 ELM STREET

TORRINGTON, CONNECTICUT

SUBSIDIARY OF **GENERAL TIME** CORPORATION

instance, a gate can easily be devised by moving the common resistors from the cathode side to the plate circuit of V_1 and V_2. The resultant gate, however, although capable of amplifying the trigger pulse, is not as useful as the gates of Fig. 2A and 2C since it does not possess a high-impedance input.

References

(1) "Ultra-High-Frequency Techniques," Chapter 4, Brainerd, Koehler, Reid and Woodruff, Van Nostrand.

(2) "Waveforms," Chapters 5, 17, Chance, Hughes, MacNichol, Sayre, Williams, McGraw-Hill.

Graphical Solution for Feedback Amplifiers

By LEROY D. BARTER

Seattle, Washington

THE GAIN of any amplifier may be expressed as the maximum gain times a function that shows the variation in the gain.

$$A = \frac{A_m}{P(A)} \qquad (1)$$

where A_m is the maximum gain of an amplifier, $P(A)$ is a complex function, showing both the change in magnitude and phase shift of the gain. In an amplifier with feedback the gain will be

$$A_{fb} = \frac{A}{1 - A\beta} = \frac{\frac{A_m}{P(A)}}{1 - \frac{A_m}{P(A)}\beta} \qquad (2)$$

$$\frac{A_{fb}}{A_m} = \frac{1}{P(A) - A_m\beta}$$

$$\frac{A_m}{A_{fb}} = P(A) - A_m\beta \qquad (3)$$

Now if $P(A)$ can be conveniently expressed, the gain with feedback can be solved by means of Eq. 3. The remainder of the paper demonstrates the method of finding $P(A)$ and its use.

Single-Stage Amplifier

The gain of a single-stage amplifier can be thought of as containing a gain element that is independent of frequency, within the range considered, and an element that depends upon frequency for its voltage relationships. In Fig. 1A is a single-stage amplifier that may have negative feedback or not depending upon the position of the switch. The gain then is that due to the tube, and the consequent re-

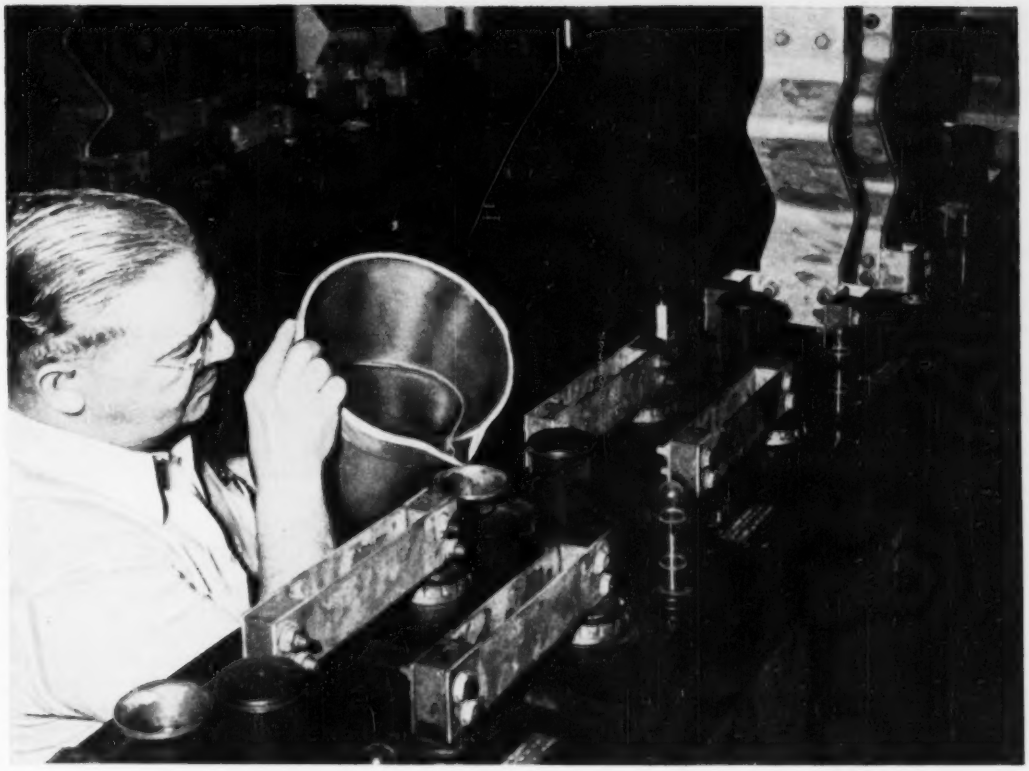

At the New York Telephone Company's Triangle exchange in Brooklyn, emergency batteries stand ready to deliver 3000 amperes for several hours.

How a whiff of stibine led toward lower telephone costs

In the Bell System there are a million lead storage battery cells connected to telephone circuits in the central offices. Current seldom flows in or out of these cells beyond the trickle which keeps them charged. In the rare event of power failure, however, they stand ready to supply the current for your telephone service.

Even in this stand-by service, cells require water to make up for electrolysis. And they consume power and eventually wear out. But Bell Laboratories chemists discovered how to make a battery which lasts many more years and requires less attention — by changing a single ingredient, the clue to which came unexpectedly from another line of their research.

The clue was a minute trace of stibine gas in battery rooms which electrochemists detected while on the lookout for atmospheric causes of relay contact corrosion. In small traces the gas wasn't harmful but to battery chemists it offered a powerful hint.

For stibine is a compound of antimony—and antimony is used to harden the lead grids which serve as mechanical supports for a battery's active materials. Tracing the stibine, the chemists discovered that antimony is leached out of the positive grid and enters into chemical reactions which hasten self-discharge and shorten battery life.

Meanwhile, in the field of cable sheath research Bell metallurgists had discovered that calcium could be used instead of antimony to harden lead. And theory showed that calcium would not react destructively in a battery. The result is the new long-life calcium-lead battery which cuts battery replacement costs, goes for months without additional water, and needs but $\frac{1}{5}$ the trickle current to keep its charge.

It demonstrates again how diverse lines of research come together at Bell Telephone Laboratories to keep down the cost of telephone service.

BELL TELEPHONE LABORATORIES

Working continually to keep your telephone service big in value and low in cost.

MODEL 33. Crystal or dynamic
One of Turner's most popular units.

Turner Microphones
invite comparison

TURNER

★ Compare the style
★ Compare the ruggedness
★ Compare the performance
★ Compare the price

Name the job — there's a Turner Microphone that you can specify with confidence. Turner crystal, dynamic, cardioid, ceramic, and carbon microphones set the pace for "sound performance".

WRITE FOR LITERATURE

THE **TURNER** COMPANY

905 17th Street N. E. • Cedar Rapids, Iowa

IN CANADA:
Canadian Marconi Company, Montreal, P. Q., and branches
EXPORT:
Ad. Auriema, Inc., 89 Broad Street, New York 4, N. Y.

TURNER

Crystals licensed under patents of the Brush Development Company.



FIG. 1—Simple amplifier in which negative feedback may be introduced

duction in gain due to the external circuit shown in Fig. 1B. In the normal case the effects of C_1 occur at the lower frequencies while the effects of C_c' occur at the higher frequencies. Hence we may write two equations that will express the variation of gain due to frequency.

$$A_{LF} = \frac{E_{out}}{E_{in}} = A_1\left(\frac{R_1}{R_1 + R_{int} - \frac{j}{\omega c}}\right)$$

$$= A_1\left(\frac{R_1}{R_1 + R_{int}}\right)\left(\frac{1}{1 - \frac{j}{\omega C_1(R_1 + R_{int})}}\right)$$

Let $R_{LF} = R_1 + R_{int}$

and let $A_m = A_1\left(\frac{R_1}{R_1 + R_{int}}\right)$

$$A_{LF} = A_m\left(\frac{1}{1 - \frac{j}{\omega C_1 R_{LF}}}\right) \quad (1a)$$

$$A_{HF} = \frac{E_{out}}{E_{in}} = A_1\left(\frac{Z_1}{R_{int} + Z_1}\right)$$

$$= A_1\left(\frac{1}{\frac{R_{int}}{Z_1} + 1}\right)$$

where $\frac{1}{Z_1} = \frac{1}{R_1} + j\omega C_1'$

$$A_{HF} = A_1\left(\frac{1}{\frac{R_{int}}{R_1} + j\omega C_1' R_{int} + 1}\right)$$

$$= \frac{A_1 R_1}{R_{int} + R_1}\left(\frac{1}{1 - \frac{j\omega C_1' R_{int} R_1}{R_{int} + R_1}}\right)$$

Let $R_{HF} = \frac{R_{int} R_1}{R_{int} + R_1}$

and let $A_m = \frac{A_1 R_1}{R_{int} + R_1}$

(Continued on p 208)

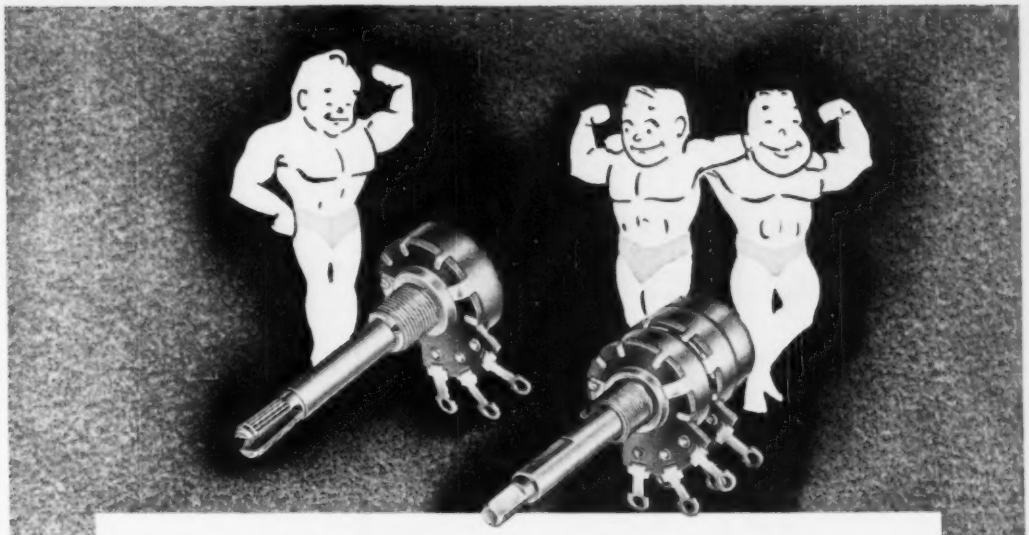

SMALLEST SIZE YET

for conservatively rated .5 watt controls!

You save appreciable space with Stackpole LR variable resistors—yet still have ample wattage capacity for most TV and mobile radio applications. Only 57 64" in diameter, these sturdy controls are conservatively rated at ½ watt* and are outstandingly quiet, fully dependable.

Single LR controls are supplied with or without SP-ST or DP-ST line switches. Dual concentric controls—tops for dozens of space-saving applications—are available with practically any needed shaft or switch arrangement.

Write for details or samples to your specifications.

Electronic Components Division

STACKPOLE CARBON COMPANY, ST. MARYS, PENNA.

*½ watt rating where voltage across units does not exceed 350 volts for linear tapers, or for non-linear controls having a taper of no less than 10% of the total resistance at 50% rotation and when voltage is not in excess of 225 volts.

STACKPOLE

FIXED AND VARIABLE CARBON RESISTORS • IRON CORES • CERAMAG® CORES
MOLDED COIL FORMS • MOLDED "GIMMICK" CAPACITORS • INEXPENSIVE
LINE AND SLIDE SWITCHES

RCA TELEVISION COMPONENTS

THE STANDARDS OF THE INDUSTRY

Horizontal Osc. & Sync. Stabilizer Coil



Horizontal Deflection & High-Voltage Transformer

Deflecting Yoke

Horizontal Linearity Control

Base your TV designs on RCA performance-proved deflection components

RCA TV Components reflect RCA's vast experience in TV design . . . and incorporate the most advanced engineering features. RCA TV components are unexcelled for wide-angle deflection systems.

All RCA television components are "originals," with electrical and mechanical specifications rigidly held to coordinated circuit and tube requirements. They are "performance proved" and they are competitively priced.

RCA Application Engineers are ready to work with you in the adaptation of RCA television components to your specific designs. For further information write or phone RCA, Commercial Engineering, Section K42S, Harrison, N. J., or your nearest RCA field office.

(EAST) Harrison 6-8000, 415 S. 5th St., Harrison, N. J.
(MIDWEST) Whitehall 4-2900, 589 E. Illinois St., Chicago, Ill.
(WEST) Trinity 5641, 420 S. San Pedro St., Los Angeles, Calif.

RCA **RADIO CORPORATION of AMERICA**
ELECTRONIC COMPONENTS HARRISON, N. J.



FIG. 2—Two-stage amplifier with optional negative feedback

$$A_{RF} = A_m \left(\frac{1}{1 + j\omega C_1' R_{RF}} \right) \quad (4b)$$

Therefore $P_L(A) = 1 - \frac{j}{\omega C_1' R_{LF}}$ (5a)

$$P_H(A) = 1 + j\omega C_1' R_{RF} \quad (5b)$$

Insertion of Eq. 5 into Eq. 3 gives

$$\text{Low frequency } \frac{A_m}{A_{LF}} = \frac{1 - \frac{j}{\omega C_1' R_{LF}} - A_m\beta}{(1 - A_m\beta)\left(1 - \frac{j}{\omega C_1' R_{LF}(1 - A_m\beta)}\right)} \quad (6a)$$

$$\text{High frequency } \frac{A_m}{A_{HF}} = \frac{1 + j\omega C_1' R_{RF} - A_m\beta}{(1 - \beta A_m)\left(1 + j\frac{\omega C_1' R_{RF}}{1 - A_m\beta}\right)} \quad (6b)$$

Hence the feedback has the effect of modifying the RC circuits by the feedback factor $(1 - A_m\beta)$. With this new value of RC and the universal gain curves[5] the gain of an amplifier with one pair of RC's in the circuit can easily be determined.

Two-Stage Amplifier

The usefulness of Eq. 3 is more readily apparent when there are two pair of RC's in the circuit. In Fig. 2 there are two stages of amplification similar to that in Fig. 1. The gain will now be the product of the gain of the two stages. Then for two stages

$$P_L(A) = \left(1 - \frac{j}{\omega C_1' R_{LF1}}\right)\left(1 - \frac{j}{\omega C_2' R_{LF2}}\right)$$

Let $S_1 = \frac{1}{\omega C_1' R_{LF1}}$ and $S_2 = \frac{1}{\omega C_2' R_{LF2}}$

$$P_L(A) = (1 - jS_1)(1 - jS_2) = 1 - S_1S_2 + j(S_1 + S_2) \quad (7a)$$

$$P_H(A) = (1 + j\omega C_1' R_{RF1})(1 + j\omega C_2' R_{RF2})$$

Let $S_1 = \omega C_1' R_{RF1}$ and $S_2 = \omega C_2' R_{RF2}$

$$P_H(A) = (1 + jS_1)(1 + jS_2) = 1 - S_1S_2 + j(S_1 + S_2) \quad (7b)$$

Figures 3 shows a plot of the por-

With MB products, of course, you can

give Vibration Problems the FULL TREATMENT

One thing is sure about your vibration problem. The more "tools" you have to deal with it, the faster you get your answers, the better the results you achieve, the more work you save.

And here is the equipment for the job. These MB products can help you in the four essential phases of vibration control work.



DETECTION:

The MB Vibration Pickup has practically no lower limit on amplitudes to which it responds. It stands up in heavy duty work as well. It converts vibratory motions to electrical voltages which can be measured by the meter.



MEASUREMENT:

The improved MB Vibration Meter interprets the nature of vibration picked up. It gives you direct readings on velocity, acceleration or displacement of vibration by simple switch selection. A rugged, accurate and portable unit, it is being used effectively both for quality-control work and research.



EXCITATION:

Want to know how your product will fare against vibration? Then subject it to vibration simulating that found under operating conditions by means of an MB Vibration Exciter. Within *minutes* or *hours* see the effect of *years* of vibration on your product. Available in forces of from 10 to 300 pounds, MB Exciters can fatigue-test products ranging from electron tubes to heavy axle shafts.



CONTROL:

Many engineers now know that Isomode* Mounts not only simplify designing, but provide superior isolation as well. Possessing equal spring rate in all directions, these units absorb vibration in all planes, and may be installed at any angle. They have high load capacity in small size. Also unusual stability for their softness, and self snubbing feature for overloads.

*Trade-Mark Reg. U.S. Pat. Off.

Get a more complete picture on your own vibration problems by doing what so many companies have found to be good practice – make MB your headquarters for vibration control information.

More data and bulletins on any of these products are yours for the asking. Write to Dept. L5

THE MB MANUFACTURING COMPANY, Inc.
1060 State St., New Haven 11, Conn.

PRODUCTS FOR MEASUREMENT . . . REPRODUCTION . . . AND CONTROL OF VIBRATION

P D Q!

Above:
Bliley type TCO-1
Crystal Oven with
Bliley type BH6
crystal

PRECISION . . .

DEVELOPMENT . . . QUALITY!

When the end use is military . . .
Bliley crystals are number veterans.
Military specifications demand precision . . . development . . . quality.
These factors are basic with Bliley—
the top choice for 20 years.

Bliley
CRYSTALS

BLILEY ELECTRIC COMPANY
UNION STATION BUILDING
ERIE, PENNSYLVANIA



FIG. 3—Curves for graphical analysis of feedback amplifiers

tion of $P(A)$ that is in brackets. Each curve corresponds to a particular ratio of S_1/S_2. They also correspond to a ratio of the RC's since ω will cancel out. For the frequencies above midfrequency $S_1 + S_2$ will be proportional to ω. Then for the low frequencies $S_1 + S_2$ will be proportional to $1/\omega$.

The solution of Eq. 3 can now be done graphically.

$$\frac{A_{mf}}{A_{(f)}} = 1 - A_m\beta = \frac{[S_1S_2 + \text{[illegible]}}{j\omega(S_1 + S_2)} \qquad (8)$$

Since for negative feedback, β is negative, (switch in position b in Fig. 2), $1 - A_m\beta$ will be a positive number and can be plotted in Fig. 3 as the distance OA. The quantities in the brackets will be the distance OB. Then the value of $P(A)$ will be the vector difference of OB and OA and is equal to AB. In order to visualize what the curves say, draw a circle through O and with the center at A. Then the radius of this circle will represent the magnitude of the gain at the midfrequency. Since Eq. 3 and consequently Eq. 8 represent the denominator of Eq. 2, the gain at the frequency of B will equal the distance AC divided by AB, or $A/A_m = AC/AB$. Hence when AB is less than AC, the gain will be larger than that at midfrequency. Now as B varies along the curve the gain versus frequency can be visualized.

The phase shift can also be determined. For the case of no feedback the phase shift from midfrequency will be the angle O-1-B. With feedback the angle will be O-A-B.

Now the ratio of the RC's can be intelligently chosen to produce a flat frequency response. If AB is less than AC, there will be a point D where the gain is again equal to the gain at midfrequency. If we impose the condition that the gain in the pass band should not vary

Spincraft
SKILL WILL DO IT

offers an approach to the Production of Electronic Parts that is

fast, simple economical

CONICAL ENVELOPE . . . a stainless steel spinning for cathode ray assembly made of 1/8 in. thick type 446 chrome iron. 16 in. diameter. 11 1/2 in. deep.



RECTANGULAR ENVELOPE . . . a special mass production product made for the television industry of 1/8 in. thick type 430 chrome iron. 24 in. wide. 16 in. high. 9 in. deep.

CORONA SHIELD . . . an aluminum spinning combining hemispherical and spherical forms. Made of 250 aluminum, 1/8 in. thick. Overall length 20 in.

● Immediate cost reduction is today's most urgent demand — requiring more alert thinking in the designing of parts and more ingenious tooling methods. Progressive new Spincraft techniques may help simplify your production problems, just as they have helped other large and small manufacturers.

Some examples of this advanced engineering are shown here. It will pay you to study them . . . and ask yourself if you can use this pioneer company's versatile ability to help solve your electronic problems. You'll find the Spincraft Data Book a good source for ideas. Write for your copy—without obligation.

Spincraft Inc.
SKILL WILL DO IT
4143 W. State St. Milwaukee 8, Wis.
Heretofore known as
Milwaukee Metal Spinning Co.

12 Improvements IN NEW 1951

MODEL O-6 PUSH-PULL

Heathkit OSCILLOSCOPE KIT

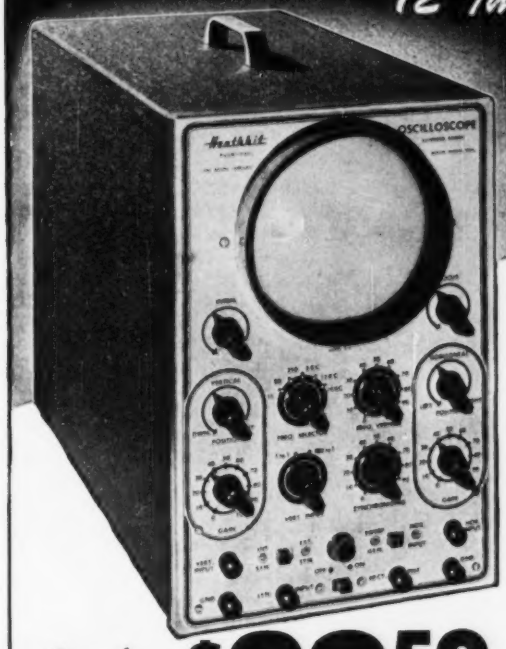

- ★ New AC and DC push-pull amplifier.
- ★ New step attenuator frequency compensated input.
- ★ New non frequency discriminating input control.
- ★ New heavy duty power transformer has 68% less magnetic field.
- ★ New filter condenser has separate vertical and horizontal sections.
- ★ New intensity circuit gives greater brilliance.
- ★ Improved amplifiers for better response useful to 2 megacycles.
- ★ High gain amplifiers .04 Volts RMS per inch deflection.
- ★ Improved Allegheny Ludlum magnetic metal CR tube shield.
- ★ New synchronization circuit works with either positive or negative peaks of signal.
- ★ New extended range sweep circuit 15 cycles to over 100,000 cycles.
- ★ Both vertical and horizontal amplifier use push-pull pentodes for maximum gain.

Only $39.50

The new 1951 Heathkit Push-Pull Oscilloscope Kit is again the best buy. No other kit offers half the features — check them.

Measure either AC or DC on this new scope — the first oscilloscope under $100.00 with a DC amplifier.

The vertical amplifier has frequency compensated step attenuator input into a cathode follower stage. The gain control is of the non frequency discriminating type — accurate response at any setting. A push-pull pentode stage feeds the C.R. tube. New type positioning control has wide range for observing any portion of the trace.

The horizontal amplifiers are direct coupled to the C.R. tube and may be used as either AC or DC amplifiers. Separate binding posts are provided for AC or DC.

The multivibrator type sweep generator has new frequency compensation for the high range it covers; 15 cycles to over 100,000 cycles.

The new model O-6 Scope uses 10 tubes in all — several more than any other. Only Heathkit Scopes have all the features.

New husky heavy duty power transformer has 50% more laminations. It runs cool and has the lowest possible magnetic field. A complete electrostatic shield covers primary and other necessary windings and has lead brought out for proper grounding.

The new filter condenser has separate filters for the vertical and horizontal screen grids and prevents interaction between them.

An improved intensity circuit provides almost double previous brilliance and better intensity modulation.

A new synchronization circuit allows the trace to be synchronized with either the positive or negative pulse, an important feature in observing the complex pulses encountered in television servicing.

The magnetic alloy shield supplied for the C.R. tube is of new design and uses a special metal developed by Allegheny Ludlum for such applications.

The Heathkit scope cabinet is of aluminum alloy for lightness of portability.

The kit is complete, all tubes, cabinet, transformer, controls, grid screen, tube shield, etc. The instruction manual has complete step-by-step assembly and pictorials of every section. Compare it with all others and you will buy a Heathkit. Model O-6. Shipping Wt., 30 lbs.

New INEXPENSIVE MODEL S-2 ELECTRONIC SWITCH KIT

Twice as much fun with your oscilloscope — observe two traces at once — see both the input and output traces of an amplifier, and amazingly you can control the size and position of each trace separately — superimpose them for comparison or separate for observation — no connections inside scope. All operation electronic, nothing mechanical — ideal for classroom demonstrations — checking for intermittents, etc. Distortion, phase shift and other defects show up instantly. Can be used with any type or make of oscilloscope. So inexpensive you can't afford to be without one.

Has individual gain controls, positioning control and coarse and fine switching rate controls — can also be used as square wave generator over limited range. 110 Volt transformer operated comes complete with tubes, cabinet and all parts. Occupies very little space beside the scope. Better get one. You'll enjoy it immensely. Model S-2. Shipping Wt., 11 lbs.

Only $19.50

EXPORT AGENT
ROCKE INTERNATIONAL CORP.
13 E. 40th ST.
NEW YORK CITY (16)
CABLE ARLAB N.Y.

The HEATH COMPANY

... BENTON HARBOR 14, MICHIGAN

Stop Guesswork IN OSCILLOGRAPHY

Ever tried to compare two phenomena occurring simultaneously by using two single channel scopes? Chances are that you found they couldn't do the job—or you couldn't keep up with them. Fixing your eyes on two screens at the same time is no mean trick.

Consequently, you may have tried using a single channel scope with an electronic switch. And if you did, you soon found that when it comes to observing high speed phenomena, too many signals were being missed—signals, which in a medical application, mean the difference between a person being normal or not. An optical system, of course, would be too cumbersome as well as expensive beyond justification.

If this problem is yours, the only economically sound answer is the Dual Channel Oscilloscope—Model H-21. Containing two separate and complete electron guns in a single 5" tube, this scope beats many single channel scopes in weight, size, and cost. Its sensitivity is better than 0.085 Vdc/in. (30 MV rms/in.), with individual controls for each channel. Adaptable to photographic recording, it offers engineers and scientists everywhere a valuable tool for research. Find out how the Model H-21 can help you by writing for our free bulletin today.



H-21 DUAL CHANNEL SCOPE
- Wide band, high gain DC amplifiers
- Frequency response: DC to 200KC
- Triggered and continuous sweeps
- Differential or single-ended input

ETC

electronic tube corporation
PHILADELPHIA 18, PENNSYLVANIA

more than $\pm$ m percent from the midfrequency gain, the correct ratio of the RC's can be chosen. Since the curves are a family of parabolas this can be done mathematically.

The gain will be a maximum when AB is a minimum. This minimum will be at the point where AB is perpendicular to the parabola. Therefore it is possible to express the minimum AB as a function of $S_1 S_2$. As this derivation is rather lengthy and outside the immediate interest of this paper, the results only will be given.

$$\frac{S_2}{S_1} = \frac{B}{2}\left(1 + \sqrt{1 - \frac{4}{B}}\right) - 1 \quad (9)$$

$$B = 2(1 - A_m\beta)(1 - \sqrt{1 - D^2})$$

$$D = \frac{\text{length } AC}{\text{length } AB}$$

Then the point where AB is greater than AC by m percent will be

$$S_1 S_2 = (1 - A_m\beta)(\sqrt{1 - d^2})\left(1 + \sqrt{1 + \frac{1}{d^2}}\right) \quad (10)$$

Equation 9 gives the ratio of the RC's while Eq. 10 gives the magnitude of the RC's which will produce the desired cutoff frequency.

An amplifier was designed, using the circuit in Fig. 2, to have a gain of approximately 10 with a maximum variation of gain with frequency of 5 percent. Also the low-frequency cutoff was to be as near 10 cps as convenient. These strict requirements were necessary for it was to be used in some measuring equipment for the University of Washington Engineering Experiment Station. For these conditions the ratio of the RC's must be 100. The values are shown in Fig. 4. Gain tests were run on this amplifier showing no variation of gain between 20 cps and 10,000 cps, with



FIG. 4—Two-stage amplifier circuit used to substantiate graphical method

HOW SELETRON RECTIFIERS GAVE CHICAGO A LIFT

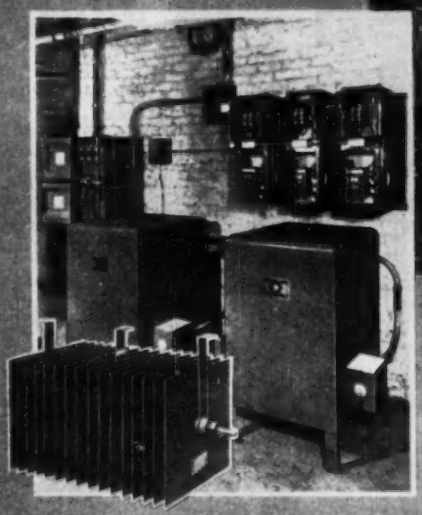

PARTIAL LIST OF ELEVATOR INSTALLATIONS USING SELETRON RECTIFIERS IN THE CHICAGO AREA

BUILDING	NO. OF RECTIFIERS	APPROX. NO. OF ELEVATORS
Bismo Hotel Tenant, 170 E. Lake Shore Dr.	4 ea. 35 KW	6
Garvine City Plating, 1750 N. Ashland Ave.	2 ea. 40 KW	2
Jewish Charities, 241 S. Wells	2 ea. 20 KW	3
1308 North Dearborn Building	3 ea. 27½ KW	4
50 E. Scott Street Building	2 ea. 14 KW	2
Bernstein Building, 14 S. Clinton	2 ea. 10 KW	2
Bush Temple, 600 North Clark	2 ea. 20 KW	3
Clinton Realty, 5228 Clinton	2 ea. 20 KW 1 ea. 14 KW 1 ea. 15 KW	4
Lansing Hotel, 1036 N. Dearborn	2 ea. 20 KW	2
Plaza Hotel, 1550 N. Clark	3 ea. 10 KW	3
Sears & Roebuck Co., 312 N. May	3 ea. 20 KW	2
Covenant Club, 10 North Dearborn	2 ea. 35 KW	3
Churchill Apts., 1261 North State	2 ea. 17 KW	2
Western Elec. Bldg., 1706 S. Wabash	2 ea. 10 KW	2
70 East Cedar	2 ea. 14 KW	3
Michael Reese Hospital	4 ea. 30 KW	10
Steinway Drug Bldg.	3 ea. 15 KW	3
Graphic Arts Bldg.	4 ea. 25 KW	6
Walton Motors	2 ea. 20 KW	2
Chicagoan Hotel	3 ea. 27½ KW	4
1320 North State Building	3 ea. 40 KW	4
Canterbury Apts.	3 ea. 14 KW	3
341 Van Buren Street Building	2 ea. 20 KW	3
Superior Elevator Co.	1 ea. 7 KW	1
342 E. Walton Building	1 ea. 7 KW	1
Clinton Machine Co.	1 ea. 10 KW	2
Western Electric Building	2 ea. 35 KW 1 ea. 14 KW 1 ea. 10 KW	6
Bazzola Drug Company	1 ea. 10 KW	1
A. Rubloff Building	3 ea. 14 KW	4
Goldenberg Furniture Company	1 ea. 10 KW	1
210 E. Pearson Street Building	3 ea. 30 KW	4
Illinois Electrotype	1 ea. 20 KW	2
Car Service Company	4 ea. 20 KW	4
St. Clair Hotel	4 ea. 25 KW	5
Eastgate Hotel	4 ea. 25 KW	4

WHEN THE POWER COMPANY changed over to alternating current in certain Chicago areas it meant that existing elevators operating on D.C. had to be converted fast, or the good people of the town would be "grounded."

Ther Electric & Machine Works of Chicago solved elevator rectification problems for considerably more than 100 famous buildings in the Windy City by designing complete power supply and regenerative braking equipment employing SELETRON rectifiers. The illustration shows a typical 3 bank unit with regenerative control, built for the Clinton Realty Co.

Of course, elevator operation is but one of many uses for SELETRON. These rugged, efficient selenium rectifiers are versatile – useful in hundreds of varying industrial applications for economical conversion of alternating current to D.C.

Your *own* rectification problems may easily be solved by SELETRON engineers. Write us now describing them – and request our new Bulletin No. ES–33

Seletron

SELETRON DIVISION

RADIO RECEPTOR COMPANY, INC.

Since 1922 in Radio and Electronics

Sales Dept: 251 West 19th St., New York 11, N. Y.

Factory: 84 North 9th St., Brooklyn 11, N. Y.

for measuring···

SPEED

PRESSURE

L·O·N·G-S·C·A·L·E

Panel Instruments

These General Electric long-scale instruments are ideal for measuring speed or pressure as a function of electrical quantities. It's easy to read the 250-degree scale—almost 5 inches long. Sturdy, molded Textolite* cases are attractively designed, improve the appearance—and sales appeal—of the panel.



You can mount several units side by side, each free from magnetic influence. That's because the concentric alnico magnets require no shielding.



Take your choice—round or square fronts. These instruments are also available in a complete list of ratings for standard electrical measurements.

Call your G-E representative for more information. Ask him for DO-81 bulletin GEA-5425 or write Apparatus Dept., General Electric, Schenectady, N. Y.

*Reg. Trademark of General Electric Company

GENERAL ELECTRIC

b12-184

a 10-percent rise at 20,000 cps. This was the frequency limit of the oscillator that was available.

The effect on the gain of any amplifier with negative feedback due to two RC's in tandem, or in general to any two parameters, can be visualized when they are expressed as in Eq. 3 and then plotted as in Fig. 3.

Bridged-T Neutralization of Pentode Amplifiers

By H. K. Bradford
Electronics Engineer,
The Glenn L. Martin Company
Baltimore, Maryland

In a high-frequency amplifier using a small unbypassed cathode resistor to reduce Miller effect, a modified bridged-T network can be used for neutralization. High and completely stable gain can be realized with this arrangement.

The equivalent circuit (essential elements) may be represented as in Fig. 1A. To complete the bridged T network would normally require additions as in Fig. 1B, which shows R_1, R_2, and C added.

Since there is an essential 90 degree phase shift across C_{pk} there need be no phase shift across R_1 and hence C should actually be a resistor. Rearranging for actual

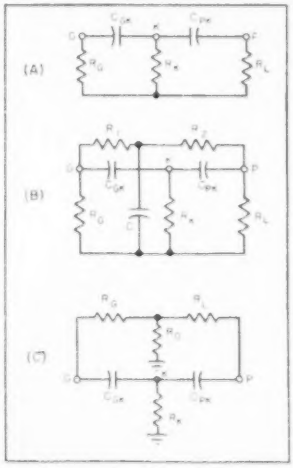

FIG. 1—Modified-bridged-T network may be used to neutralize amplifier with unbypassed cathode

Trim Assembly Time with the Tube with the Tab

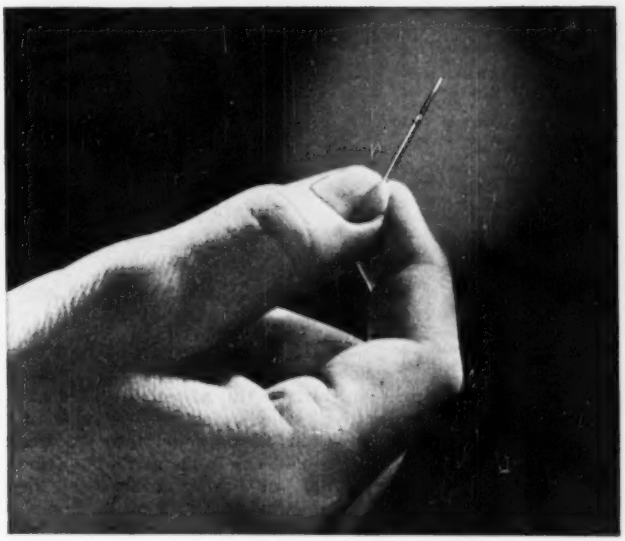

● Superior's pioneering in tubing technology is constantly at work to bring electronic manufacturers new developments—to help them produce better equipment, faster, at lower costs. Newest of these improvements is the integral tabbed round Lockseam* cathode. It is designed to eliminate a welding operation, cut assembly time, and provide superior performance.

These integral tabbed round Lockseam* cathodes may be valuable to you . . . but whether they are or not one thing is sure. If you use Seamless or Lockseam* cathodes in your product a Superior tube is available to do a Superior job. Our research and engineering facilities are ready at all times to help solve your tubing problems.

For more information about Superior Tubing and its possible place in your operation write to Superior Tube Co., 2500 Germantown Ave., Norristown, Pa.



Electronic Engineering — Life test rack and emission test set. Checking Superior assembled standard diodes under simulated customer conditions to determine if material meets minimum requirements.



To guard against contamination by processing lubricants, Superior tubing is thoroughly degreased before each annealing operation.

Part of inspection procedure on Lockseam Nickel Cathodes as they come off the production machine. Each cathode must undergo many rigid tests before being approved.

Which Is The Better For Your Product . . .

SEAMLESS . . . ? The finest tubes that can be made. Standard production is .010" to .121" O.D. inclusive, with wall thicknesses of .0015" to .005". Cathodes with larger diameters and heavier walls will be produced to customer specification.

Or LOCKSEAM* . . . ? Produced directly from thin nickel alloy strip stock, .040" to .100" O.D. in standard length range of 11.5 mm to 42 mm. Round, rectangular or oval, cut to specified lengths, beaded or plain.

Superior

THE BIG NAME IN SMALL TUBING

All analyses .010" to ⅝" O.D.
Certain analyses (.035" max. wall) Up to 1⅝" O.D.

Mfd. under U. S. Pats.—SUPERIOR TUBE COMPANY • Electronic Products for export through Driver-Harris Company, Harrison, New Jersey.

Browning OSCILLOSYNCHROSCOPES

for high-speed pulse work, radar, hf, TV, communications, facsimile

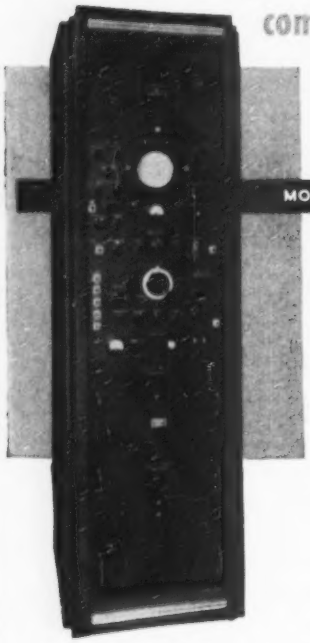

THESE ARE THE HIGHLIGHTS of equipment for laboratory research and development requiring a variety of time bases, triggers, phasing and delay circuits, and extended-range amplifiers for use in the study of wave shapes, very short pulses, and irregular transients.

MODEL OJ-17 OSCILLOSYNCHROSCOPE

A wide-band oscillosynchroscope for high-speed pulse work and study of complex wave shapes with hf components. Entire equipment is mounted in vertical rack cabinet; convenient mounting for camera to record screen images.

Circuit Features

• 5" 5RP or 5XP CR tube; anode voltage variable 10 to 20 kv. • Vertical amplifier bandwidth flat to 16 mc with response beyond 30 mc.; deflection sensitivity 0.05 volts/inch; video delay 0.2 microseconds • Horizontal amplifier bandwidth 2 mc.; deflection sensitivity 0.25 volts/inch • Driven sweep variable 0.05 to 500 microseconds/inch; saw-tooth sweep 5 to 500,000 c.p.s. • Trigger-generator output 100 volts from 500 ohms; running rate 20 to 20,000 c.p.s. • Internal blanking or deflection markers at 0.1, 1, 10, and 100 microsecond intervals • External grid connection for beam intensity modulation • Delay continuously variable to 2000 microseconds; directly calibrated dial.

Size: 81⅜"x25⅛"x24"
Weight: 500 lbs;
shipping weight: 750 lbs.

MODEL ON-5 OSCILLOSYNCHROSCOPE

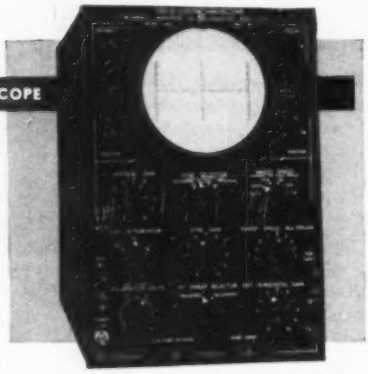

Gives you the basic equipment for viewing any voltage wave shapes — pulse or sine wave — radar or TV to audio — in a single, compact unit.

Circuit Features

• 5" CR tube 5UP1 • Triggered sweep continuously variable 1 to 25,000 microseconds/inch with direct panel calibration • Saw-tooth sweep 10 cycles to 100 KC • Vertical amplifier flat ± 3db from 5 cycles to 5 mc @ 0.075 volts/inch • Self-contained vertical deflection calibration means • Horizontal amplifier d.c. to 500 KC @ 2 volts/inch • Portable • Low cost.

Bulletins containing detailed information about these two versatile instruments will be sent at your request.

Export Sales: 9 Rockefeller Plaza, Rm. 1422, New York 20, New York

In Canada, address: Measurements Engineering Ltd., Arnprior, Ontario.

ENGINEERED FOR ENGINEERS

BROWNING
Laboratories, Inc.
Winchester, Mass.



FIG. 2—Practical circuit of amplifier using modified bridged-T neutralization

use the circuit is represented as in Fig. 1C.

For the potential generated at P to be completely cancelled at G through the two paths shown, the attenuation must be identical through the two paths and the phase shift must total 180 degrees.

The following relations are needed to make this possible:

$$\frac{R_L}{R_0} = \frac{X_{C_{PK}}}{R_K} \qquad \frac{R_L}{R_0} = \frac{X_{C_{PK}}}{X_{C_{GK}}}$$

$$R_0 = \frac{R_L R_K}{X_{C_{PK}}} \qquad R_0 = \frac{R_L X_{C_{GK}}}{X_{C_{PK}}}$$

If there is any doubt about the four given values R_0 can be made variable to adjust the feedback magnitude exactly. The phase remains within better than 1 degree correct due to the condition of the problem with usual values and the magnitude can be trimmed through wide values with R_0.

Two practical circuits are shown in Fig. 2. Coupling capacitor C_0 is added for d-c isolation of the grid. Resistance R_0 serves the dual function of grid damping plus feedback.

SURVEY OF NEW TECHNIQUES

ULTRASONIC ENERGY has proved useful in breaking up gall stones inside the intestines of dogs and rabbits. This technique, revealed by the Yale School of Medicine, may make possible the removal of gall stones from human gall bladders in inoperable situations.

AN ANALOG COMPUTER has been developed at Northwestern University which is capable of predicting performance characteristics of the oil and gas industry's multi-com-

'MAKING A BAKER'S DOZEN'

HERE ARE ARMA's 12th AND 13th Induction Motors for high performance servo applications

THE 18A 400 AND 1A 400

ANNOUNCING... 5 New UNITS

Making available a wider choice of

ARMA *Induction Motors*

Designed specifically for high performance servo applications

TYPICAL SPECIFICATIONS

	TYPE	DWG. No.	FREQ.	FIELD VOLTAGES			(Min.) NO LOAD SPEED R.P.M.	MAX. WATTS OUTPUT at R.P.M.	STALLED TORQUE (Min.) Oz. In.	ROTOR INERTIA Oz. In.²	WEIGHT lbs.
				PHASE	MAIN	CONTROL					
New	03A60	715758-1	60	2	24	24	1600	0.55 at 875	1.3	0.040	0.75
New	03B60	715756-2	60	2	24	24	3000	1.0 at 2000	1.0	0.040	0.75
	1A60	213377-2	60	2	40	40	3100	1.5 at 1750	1.7	0.030	0.5
	1B60	213251-1	60	2	115	115	3000	2.4 at 2000	3.0	0.25	1.4
	1D60	213251-2	60	2	115	115	3000	6.5 at 2000	8.0	0.25	1.4
New	1F60	64913	60	3	115		3700	13.0 at 3000	16	0.048	1.5
New	1G60	65016 (715759)	60	2	115	40	1500	1.0 at 750	3.0	0.051	0.56
	5A	213079-1	60	2	75	90	3000	6.3 at 1800	8.0	0.32	4.0
	5C	213251-1	60	2	90	75	3000	7.5 at 2000	8.0	5.51	4.3
	6	213069-1	60	2	115	90	3000	18.0 at 2000	16.5	1.38	9.8
New	03A400	715640-1	400	2	24	24	10,000	1.8 at 6000	0.7	0.036	0.75

FEATURES Low Bearing Friction • Rapid Response to Applied Voltage • Symmetrical Rotor Design • Quiet Operation • High Mechanical Accuracy • Double Ended Shafts.



INDUCTION MOTOR BOOKLET JUST PRINTED GIVES CO... DETA...

This announcement in June, 1950, created wide interest. The 18A400 and 1A400 units should have equal appeal to engineers and designers.

ARMA CO...
254 6th ST...
SUBSIDIARY OF ...TION

TYPICAL SPECIFICATIONS

TYPE	DWG. No.	FREQ.	FIELD VOLTAGES			(Min.) NO LOAD SPEED R.P.M.	MAX. WATTS OUTPUT at R.P.M.	STALLED TORQUE (Min.) Oz. In.	ROTOR INERTIA Oz. In.²	WEIGHT lbs.
			PHASE	MAIN	CONTROL					
18A400	786662	400	2	24	24	10,000	3.6 at 5000	1.6	0.030	0.8
1A400	213377-1	400	2	115	115	9,800	1.5 at 5000	0.80	0.030	0.8

If these two newest units are not listed in the booklet you already have titled "Arma Induction Motors and Generators" then send for the newly printed latest edition. It contains complete characteristics and performance curves.

ARMA CORPORATION

254 36th STREET, BROOKLYN 32, N. Y.

SUBSIDIARY OF AMERICAN BOSCH CORPORATION

ARMA PRODUCTS RELEASED FOR PRIVATE INDUSTRY

ARMA ELECTRICAL RESOLVERS* ARMA SYNCHROS ARMA INDUCTION MOTORS ARMA INDUCTION GENERATORS ARMA MECHANICAL DIFFERENTIALS ARMA ALTERNATING VOLTAGE COMPARATOR COMPUTING MECHANISMS INDUSTRIAL CONTROLS STABILIZATION DEVICES NAVIGATIONAL EQUIPMENT LIMITRON AUTOMATIC INSPECTION SYSTEM

* Licensed for use under Arma patents Nos. 2,465,634 and 2,467,646. License information available.

QUALITY ARMA INSTRUMENT PRECISION

save work . . .
increase
precision . . .

measure
phase difference
DIRECTLY

with the new TIC Phase Meter

TIC's New 320-A Phase Meter is the first commercially available instrument for the direct measurement of the phase difference between two recurrent mechanical motions or two electrical signals independent of amplitude, frequency, and wave shape.

Phase measurements are made instantly and accurately—no balances, adjustments or corrections are involved. Phase angle readings at audio and ultrasonic frequencies are indicated directly on a large wide-scale meter with ranges of 360°, 180°, 90° and 36°. Useful frequency range 2 cps. to 100 k.c.

In audio facilities, ultrasonics, servomechanisms, geophysics, vibration, acoustics, aerial navigation, electric power transformation or signaling . . . in mechanical applications such as printing register, torque measurement, dynamic balancing, textile and packaging machinery and other uses where an accurate measure of the relative position of moving parts is required . . . the Phase Meter is a long needed measuring instrument never before available — a new tool for a heretofore neglected field of measurement.

Technical Catalog — yours for the asking. Contains detailed information on all TIC Instruments, Potentiometers and other equipment. Get your copy without obligation — write today.

TECHNOLOGY INSTRUMENT CORP.
1058 Main Street, Waltham 54, Massachusetts
Engineering Representatives
Cleveland, Ohio—FRospect 1-8171 . . . Manhasset, N. Y.—Manhasset 7-3424 . . . Chicago, Ill.—UPtown 8-1141 . . . Boston, Mass.—Boston 8-5027 . . . Rochester, N. Y.—Genesee 3147 M . . . Cambridge, Mass.—KIrkl. 4-1771 . . . Canaan, Conn.—Canaan 649 . . . Hollywood, Cal.—HOllywood 2-8205 . . . Dayton, Ohio—Michigan 5721 . . . Dallas, Texas—DIxon 2918

ponent fractionating towers. Until recently, such calculations have been the cause of considerable trial-and-error computations. The computer's results are not only much more reliable, but they are produced in a small fraction of the time previously required. The new machine is expected to aid in the design of new equipment and in redesigning old equipment for more efficient operation.

THE RELATION between force applied to aircraft controls during flight test and the actual deflection of the controls is measured by an instrument developed by the National Bureau of Standards. Called the stick-force indicator, it operates satisfactorily on varying aircraft voltages and makes possible a complete photographic record of the forces applied in both required directions.

The standard stick handle is replaced by one containing a cantilever spring. Deflection of the spring causes rotary motion of a selsyn transmitter. The selsyn indicators are calibrated to read directly in force. The entire equipment exclusive of leads weighs only three pounds.

AN INSTRUMENT for indicating pressures in cylinders of engines has been developed in France. A beam of light passes through a slit, one side of which is fixed, the movements of the other being controlled by the deflection of a diaphragm under pressure. The light modulations are registered by means of a photoelectric cell connected to a cathode-ray oscillograph.

A HERETOFORE waste material resulting from the manufacture of atomic bombs will shortly be put to practical use. A radio-active gas will be used by the American Broadcasting Company to detect leaks in the coaxial cable systems serving the net's tv transmitters in the five cities, permitting almost instantaneous adjustments in the cables and thereby preserving power and quality of the telecast signal as its maximum. The new process is expected to solve one of telecasting's most vexing problems.

Turn Your "DIVINING ROD" on Your Own Product

SERIES 1145 Small Square Case Counter (Rotary Ratchet type) shown about twice actual size... built into products like cameras, coin machines, office machines, linotypes, postage machines, parking meters, light machine tools. One of the scores of basic types of electrical and mechanical counters shown in free 8-page "Count-Book" shown below. Write for a copy.

...you may find NEW SALES welling up from a hidden COUNT-Ability

As the pioneers searched for water with an educated witch-hazel switch . . . so turn your own mathematical mind on this million-dollar question:

"Would My Product Be More Useful To My Customers . . . If It Could Count?"

Call a Veeder-Root engineer and let him help you answer that question. Then, if the answer is favorable, he will *build-in* a Veeder-Root Counter as an integral part of your product . . . to build more sales than you ever counted on before. Look up the nearest V-R office in your Classified Directory — or call the main office: Hartford 7-7204.

Free Book

Veeder-Root COUNTERS "Count Anything on Earth"

VEEDER-ROOT INC., HARTFORD 2, CONN.

In Canada: Veeder-Root of Canada, Ltd., 955 St. James Street, Montreal 3.
In Great Britain: Veeder-Root Ltd., Kilspindie Rd., Dundee, Scotland.

VARIAN MICROWAVE ENGINEERING

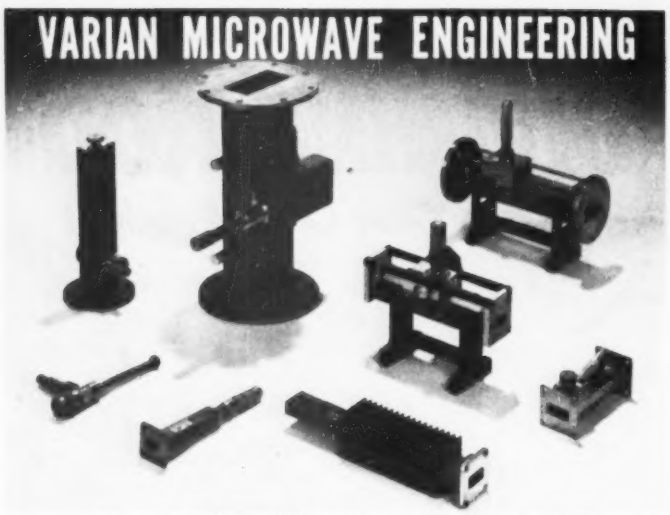

. . . . creates a broad line of practical test equipment

The design and development of klystrons and other microwave tubes is closely related to the development of necessary complementary microwave test units. Test equipment, initially designed for complex measurements in the Varian Associates laboratories, has been made available to others, and expanded into production on all types of measuring equipment covering selected frequency ranges between 400 and 20,500 mc. Throughout, design emphasis is on maximum reliability combined with adequate precision for general laboratory measurements. Some of these items are illustrated. A full tabulation by model numbers appears below. Other specialized equipment for production and laboratory testing is available to order.

	TRANSMISSION LINE SIZE (O.D. INCHES)									
	Coaxial		Waveguide							
	7/8	3/8	1 1/2 x 3	1x2	3/4 x 1 1/2	5/8 x 1 1/4	1/2 x 1	391 x 702	1/4 x 1/2
Adapters, waveguide to coax			51, 52 61, 62	54	55	56	57		
Attenuators, Variable flap			226	228	229	230	231 231-B	232 232-B	233 233-B
Variable Calibrated			261-A						
Fixed Calibrated			261 161	163	164	165	166		
Waveguide Bends—90° E plane 90° H plane			291 292	295 296	297 298	299 300	301 302	303 304	305 306
Waveguide 90° Twist			321	323	324	325	326	327	328
Crystal Detecting Section		341 342					351 366 366-A 366-B	352 352-A 367	353 353-A 368
Frequency Meters, Search		501							
Precision		501-A			549		551	552	
Standing Wave Detector			581	585	586	587	588	589	590
Waveguide Tees—Series Shunt			856 886	858 888	859 889	860 890	861 891	862 892	863 893
Magic Tees			916	918	919	920	921	922	923
Terminations—Low Power High Power			975 1002	977 1004	978 1005	979 1006	980 1007	981 1008	982 1009
Transformers—Stub Tuner		1081 1052							
Slide Screw E-H			1091 1121	1093 1123	1094 1124	1095 1125	1096 1126	1097 1127	1098 1128
Waveguide Adjustable Short Circuits			786	788	789	790	791	792	793
Support Pedestals			1201	1203	1204	1205	1206	1207	1208
Crystal Mixers		621							
Directional Couplers	381 386 387		401				416 417 421 422 423 424 492	431 433 434	464

Combine Varian klystrons, Varian power supplies and Varian test equipment in a complete set-up for laboratory and field measurements.

VARIAN associates

99 washington st.
san carlos, calif.

graph and radio or television, besides choosing correct equalization for all types of domestic and foreign recordings. The all-triode unit, with maximum output of 30 w, applies 100-percent negative feedback, including drivers, output tubes and output transformer. Frequency response is within ± 0.25 db from 20 to 30,000 cycles. Hum and noise level is 80 db below rated output. Output impedances are 4, 8 and 16 ohms. A total of 12 tubes is utilized in the power amplifier and remote control unit. High gain tubes are shock-mounted. Power consumption is 150 w.



Subminiature Relays

NEOMATIC, INC., 879 Wellesley Ave., Los Angeles 49, Calif. Developed to meet the exacting space requirements of manufacturers of aircraft, airborne equipment, guided missiles, rockets, radar and electronic components, the new series M antivibration relays measure less than ⅝ in. × ¾ in. × 2⅝ in. and weigh less than ½ ounce. Coils are available in ratings from 1 to 72 volts d-c, with resistances ranging from below 1 ohm to 5,000 ohms.

Sweep & Marker Generator

KAY ELECTRIC CO., Pine Brook, N. J., has announced Marka-Sweep,

EXACTLY RIGHT
for tight spots

RIGHT
for performance too!

Sangamo Type 60 Capacitors

Where exceptionally small filter capacitors are a necessity Sangamo Types 62 and 64 Capacitors are your best choice. These capacitors are mineral oil impregnated for E characteristic and assure long life and excellent performance at temperatures from −55° C to + 85° C. They are ideal for aircraft, guided missile work, or commercial applications.

Types 62 and 64 paper capacitors are hermetically sealed in seamless drawn steel cases, *smaller* than the size requirements of joint Army-Navy specification JAN-C-25, CP 60 Series. Non-magnetic copper or brass cases can be supplied, if desired. Standard capacitors are supplied with top terminals and brackets for upright mounting, or with bottom terminals and brackets for inverted mounting. For further information, send for your copy of Catalog No. 832.

Whenever you need capacitors, choose from the complete Sangamo line of paper, mica, electrolytic and button capacitors for every industrial, electronic and radio application.

Your Assurance of

Dependable Performance

SANGAMO ELECTRIC COMPANY
SPRINGFIELD, ILLINOIS
IN CANADA: SANGAMO COMPANY LIMITED, LEASIDE, ONTARIO

Look to Permoflux

for the NEWEST...FINEST...MOST SENSATIONAL

AUDIO COMPONENTS

Newest!

MINIATURES AND SUBMINIATURES

The MRB-3 miniature dynamic receiver and microphone has excellent wide range frequency response characteristics, maintained flat by the Patented Permoflux acoustical damping method. Utilizes a self-formed voice coil. Sensitivity—115 db in .6 cc coupler with 1 m.w. input. Overall diameter 1" height ⅝". Can be supplied with miniature input or output transformers in any impedance.

T1 and T2 Transformers and Chokes—These sub-miniature units provide power efficiency from 80-90% with high voltage breakdown characteristics and extremely low susceptibility to electrolytic deterioration. Frequency response is ± 2 db from 100 to 8000~. Impedances up to 200,000 ohms and windings with inductive reactances up to one megohm. Ideal for use with Permoflux microphone-receiver units and headsets.

Model MRB-3

Model T1

Model T2

Finest!

STANDARD
HIGH FIDELITY
SUPER HIGH FIDELITY
DYNAMIC HEADPHONES

are world famous and quality-recognized products of Permoflux Corp. Sturdy and comfortable, they are built to withstand excessive shock, high humidities and a wide range of temperatures without impairing their high efficiency and dependable performance. Patented acoustical damping provides a flat frequency response to 4500~ in standard models and through 10,000~ in Super High Fidelity models. Unparalled in performance for broadcast studio, aviation, laboratory, and audiometer work.

DHS-17
CAA Approved

Most Sensational!

ROYAL EIGHT"
Compares with any 12" speaker

PERFORMANCE CURVE PERMOFLUX 8T-8-1

This average-laboratory response curve of the Permoflux 8T-8-1 proves that it compares with the finest speakers regardless of size or price.

8T-8-1
Eight-Inch
Speaker
with the
Blue Cone

PERM-O-FLUX
"SOUND IN DESIGN"

PERMOFLUX CORPORATION

4900 W. GRAND AVE., CHICAGO 39, ILL. • 336 S. VERDUGO RD., GLENDALE 5, CALIF.

model IF, a new electronic sweep and marker generator for production alignment of tv receiver i-f systems. A three-position switch selects the 20-to-30, 30-to-40 or 40-to-50-mc range with overlap. Sweep width is approximately 15 mc. The output level may be varied between 50 μv and 250 μv across the 70-ohm unbalanced output. A panel switch narrows the sweep and recenters it to make it suitable for sound-channel measurements.



Midget Switch

ACRO MFG. CO., Columbus 16, Ohio. Model M-OM midget snap-action switch has particular application for condensed timing and sequence operations. Contact points are silver, 99.7 percent pure. Current carrying capacity is 3 amperes at 125 volts a-c. Rated capacity life is 500,000 actuations.



Calorimetric Wattmeter

VACUUM TUBE PRODUCTS, 302 N. Clementine St., Oceanside, Calif., has developed a new portable calorimetric wattmeter (Cubic Micro-Cal) to measure absolute microwave power in both laboratory and field use. Consisting of two units, liquid circulator and calorimetric termination, it gives a direct read-

For Temperature Ranges from 500° F. to -85° F.

Varglas Silicone Electrical Insulating Tubing and Sleeving

Lead Wire and Tying Cord

VARGLAS SILICONE is a sensationally new electrical insulating sleeving and tubing developed by our laboratory and pilot plant during the war. It is a product which combines Varglas and Silicone to bring revolutionary possibilities to electrical insulation.

VARGLAS SILICONE is efficient under a wide temperature range...to 500° F. or more in some applications, yet remains completely flexible at –85° F. It has excellent resistance to moisture and lubricating oil, is flame resistant and self-extinguishing, *and is the strongest of the accepted insulating materials.*

VARGLAS SILICONE, pioneered by VARFLEX CORPORATION, is the first combination of these outstanding features:

1. **VARGLAS** — Continuous filament Fiberglas — a moisture and fungus proof material which will not burn and is chemically inert — strong and flexible at high and low temperatures.
2. **NORMALIZING**—Removes binder and organic inclusions from the Fiberglas — improves electrical qualities and allows uniform impregnation.
3. **SILICONE HIGH TEMPERATURE RESIN** — Which has a natural affinity for the Fiberglas, renders it abrasion-resistant, flexible and non-fraying.

VARFLEX CORPORATION, manufacturers of electrical insulating tubing and sleeving, are insulation specialists. If you require special insulation, write us about your problems. We will gladly quote on your individual requirements or ASTM specifications. We have a complete line of sleeving and tubing, based on Fiberglas, cotton, and extruded plastics.

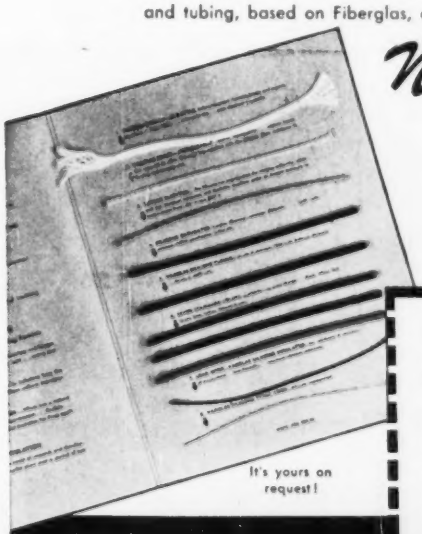

Now, Varflex invites you to test these free samples of Varglas Silicone in your own plant or laboratory.

Just Clip this coupon!

VARFLEX CORPORATION
308 N. JAY ST. ROME, N. Y.

Please send me folder containing free samples of Varglas Silicone products.

Name .....

Company .....

Address .....

City ..... Zone ..... State .....

VARFLEX CORPORATION, 308 N. JAY ST., ROME, N.Y.

Don't wait for the darkroom...

SNAP THE SHUTTER – SEE THE RESULTS IN ONE MINUTE!

This 3¼ x 4¼ print of a multi-beam scope image was ready for evaluation a minute after the shutter was snapped.

There's no longer any need to wait for darkroom processing before evaluating newly exposed photographic "stills" of oscilloscope images.

With the new Fairchild-Polaroid Oscilloscope Camera you don't even bother with focusing—just snap the shutter, and remove the print from the back of the camera a minute later. The camera can be set up within two minutes; removed within a few seconds. Think of it—accurate photographic records in almost as little time as it would take to make sketches from memory.

Each 3¼ x 4¼ print records two traces to make comparisons easy and to cut film costs in half.

The complete Fairchild-Polaroid Oscilloscope Camera consists of *scope adapter* for any five-inch oscilloscope, *light-tight hood* with viewing port, and *Polaroid-Land Camera body* with special lens and two-position shift device.

Write for complete data and prices on the F-28A Oscilloscope Camera Kit including camera, carrying case, and film. *Fairchild Camera and Instrument Corporation, 88-06 Van Wyck Blvd., Jamaica 1, N. Y.* Dept. 120-12A1

Distributors: *Tektronix Inc., Portland, Ore.; Electronic Tube Corp., Phila. 18, Pa.*

Specifications

Lens — Special 75 mm f/2.8 Wollensak Oscillo-anastigmat.

Shutter — Wollensak Alphax; speeds 1/25 sec. to 1/100 sec., "time," and "bulb."

Focus — Fixed (approx. 8 in.).

Picture Size — 3¼ x 4¼ in. (2 images per print; 16 exposures per roll of film).

Image Size — One-half reduction of scope image.

Writing Speed — to 1 in./μsec at 3000V accelerating potential; higher speeds at higher voltages.

Dimensions — Camera, 10½ x 5¼ x 6¼ in.; hood, 11 in. length, 7½ in. dia.; adapter, 2 in. width, 6⅝ in. max. dia.

Weight — Complete, 7⅛ lb.

Fairchild CAMERA AND INSTRUMENT CORPORATION

ing in watts on the basis of incident microwave power being dissipated into the calorimetric termination. A curve is furnished with the unit, allowing any liquid flow rate to be adjusted. The Cubic Micro-Cal can be used to calibrate other secondary-type power devices such as thermally activated wattmeters. Frequency range is from 2,600 to 90,000 mc. Two full scale ranges are available—100 w and 500 w.



High-Power Amplifier

RAULAND-BORG CORP., 3523 Addison St., Chicago 18, Ill. Model 1960 Bi-Power (biased power) amplifier is designed to handle the requirements of large p-a installations. Rated output is 60 watts at 5 percent or less total harmonic distortion (measured at 100, 400 and 5,000 cycles); 85 watts peak power. Frequency response is ± 1 db, 40 to 15,000 cps. Output impedances are 4, 8, 80 (70 volts), 250, 500 ohms.



Electronic Power Generator

RADIO CORP. OF AMERICA, Camden, N. J. The 15-CH self-contained

high voltage
Selenium Rectifiers

Make your own COMPARISON TEST

Know Which Is Best

Since most selenium rectifiers look alike, but vary greatly in quality, it is important to the user to have some simple means of determining quality. Side-by-side comparison tests are the time-honored way to compare quality. Take any 26-volt RMS selenium rectifier stack on the market—get a new G-E high-voltage stack of similar ratings and see for yourself which is the better.

These new G-E 26-volt cells thrive on comparison tests because they are outstanding in the three characteristics which mean quality in selenium rectifiers.

LOW FORWARD RESISTANCE

G.E.'s new 26-volt cells have extremely low forward resistance. This means a low voltage drop giving higher output, cooler operation, and greater rectifier efficiency. This often results in savings to you in the design and costs of other circuit components.

LOW BACK LEAKAGE

Since reverse current through a rectifier serves no useful purpose but does increase losses and heating, the low back leakage of these cells results in higher output, higher efficiency, and cooler operation.

DEPENDABLE LONG LIFE

These cells are the slowest aging of any selenium cells we have tested. These dependable cells have a life expectancy of well over 60,000 hours.

Prove for yourself the superiority of these new G-E selenium cells. *Write Section 461-13, Apparatus Department, General Electric Company, Schenectady 5, New York* for a copy of GEA-5524 which gives complete instructions for comparative testing. Contact your local General Electric Apparatus Sales Representative or authorized G-E agent to arrange your sample purchase.

GENERAL ELECTRIC

461-13

Leading Manufacturers* Specify
COMMUNICATION ACCESSORIES
TOROIDAL COMPONENTS
* Names on request...



UNCASED COILS
Toroids close-tolerance adjusted to your specifications. Coils are heat cycled to maintain accuracy even in toughest service conditions. Toroids have low T/C characteristics, extremely low magnetic pickup and external field. Coils may be supplied with balanced windings, also can be tapped, or have multiple winding for tight coupled impedance transformation.



PLASTIC COATED TOROIDS
Another C A C First. Our most progressive customers specify thermo-setting plastic coating for their coils, transformers, and tuned circuits. This tough resilient covering protects the coils and seals out moisture. Just another reason why the people who use toroids year after year specify C A C Toroidal Components.

CASED TOROIDS AND FILTERS
Rugged steel cases, construction meeting military specifications. Coils giving highest Q per unit volume and special capacitors provide sharper and more stable filters with a compactness never before possible. A special design for your every requirement.

Send for this FREE booklet today...

COMMUNICATION ACCESSORIES Company
HICKMAN MILLS, MISSOURI

power generator for medium power dielectric heating applications is capable of developing a power output of 18 to 21.8 kw at frequencies of 5.5 to 41 mc. The high-frequency output is obtained from a stabilized, self-excited oscillator employing two heavy-duty, air-cooled 889R-A power tubes that are supplied with high-voltage d-c by a three-phase, full-wave rectifier. It is designed to meet industrial requirements for a medium-sized unit, and incorporates the latest electrical and mechanical developments.



Precision Attenuators

GENERAL RADIO CO., 275 Massachusetts Ave., Cambridge 39, Mass., has available precision decade attenuators for laboratory use and for building into other equipment. Type 829 units can be built into speech and ultrasonic equipment and measuring devices. Characteristic impedance is 600 ohms for both H and T types. Type 1450 consists of an assembly of attenuator units in metal cabinets for laboratory bench use. Two- and three-dial boxes are available with maximum attenuation of 110 db.



Two-Way Mobile Radio

RADIO CORP OF AMERICA, Camden, N. J. Model CMV-4A Carfone is

COPPER ALLOY BULLETIN

REPORTING NEWS AND TECHNICAL DEVELOPMENTS OF COPPER AND COPPER-BASE ALLOYS

Prepared Each Month by BRIDGEPORT BRASS COMPANY "Bridgeport" Headquarters for BRASS, BRONZE and COPPER

Radar, Television Parts Accurately Turned in Swiss Screw Machine

Brass electronic parts, produced on Swiss screw machines, are shown in first row. Tiny parts in center are for watches. Phosphor bronze connector components at lower left. Brass bushing and flat drill at lower right. Courtesy: Iseli Swiss Screw Machine Products, Terryville, Conn.

Small, precision brass and bronze connectors and components for ultra-high frequency equipment, including radar and television, have gradually grown in demand during the past few years.

These parts are produced in the small Swiss screw machines due to the extreme accuracy and concentricity required. Since the cutting is done close to the guide bushing as the stock is fed into the tools, variations usually encountered through tool pressure on over-hanging parts are eliminated.

Excellent finishes are maintained through elimination of whipping and chattering, although spindle speeds are in excess of 6000 rpm.

Three Reasons For Brass

Three main factors are involved in the choice of brass and bronze for these parts: 1. corrosion resistance which insures unchanged electrical characteristics despite varied operating circumstances; 2. ease with which copper-base alloys can be plated with silver and gold without preparation other than the normal cleaning and the ability to hold these plates; 3. high machinability of these alloys which permits high-speed production with a minimum of tool wear.

Radar equipment is used in many climates and under adverse conditions in battle circumstances. Due to the nature of high-frequency currents it is essential to eliminate losses which come about through faulty contacts and varying resistance.

Gold, Silver Plate Used

Gold and silver plate are used mainly for their electrical conductivity and superior corrosion resistance. High frequency currents are conducted in a manner known as "skin effect" along the outside surfaces of the conductor.

Although free turning brass rod has top machinability characteristics, it is customary in Swiss machines to use tungsten carbide tools both to insure long life and good finishes.

Standard high-speed drills are used for some jobs but generally a flat drill ground from a solid piece of tungsten carbide is excellent where finish is essential. The carbide is first ground radially to the desired hole diameter with a slight back taper. It is then ground flat on both sides in a surface grinder. Finally, a 25-to-30 degree angle is ground on the cutting face with a slight cutting angle on the faces. Such a drill will give weeks of service without resharpening on brass.

Finish, Concentricity Vital

The bushing in the lower right of the photograph, although large for Swiss machines, was turned with perfect concentricity and extreme accuracy and finish on the bore.

The small parts in the photograph are those usually associated with Swiss machines. They are made from free machining brass rod and are only 3/16 in. long. The largest diameter is only 0.030 in. and is turned in the form of a cone. The two shanks are only 0.012 in. These are used in watches.

The long connector, second from left at top, is 2 1/16 long and has a 3-48 thread at the center. The other diameters are 0.062, 0.100 and 0.104 in. respectively.

At the lower left phosphor bronze is used for these connectors as high strength and ductility are required due to coldworking at assembly. High corrosion resistance of this material is also utilized.

Rod Dimensions Important

Rod for Swiss screw machine work must be carefully drawn and roll-straightened. Out-of-roundness would be reflected in the turned diameters, since a guide bushing is used.

For information and help in selecting and working copper-base alloys, contact our nearest district office or write directly to Bridgeport.



Tungsten carbide flat drill for Swiss screw machine work. Courtesy: Iseli Swiss Screw Machine Products, Terryville, Conn.

BRASS · BRONZE · COPPER · DURONZE — STRIP · ROD · WIRE · TUBING

MILLS IN
BRIDGEPORT, CONNECTICUT
INDIANAPOLIS, INDIANA
In Canada:
Noranda Copper and Brass Limited, Montreal

BRIDGEPORT BRASS COMPANY
BRIDGEPORT 2, CONNECTICUT
Established 1865
"Bridgeport" *District Offices and Warehouses in Principal Cities*

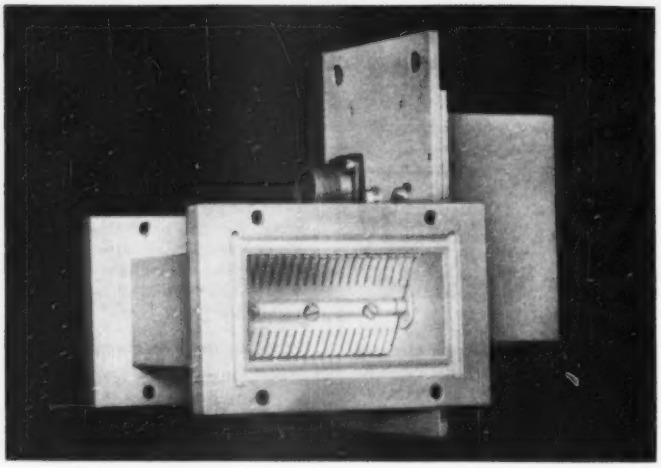

Microwave "Shutter" by TERPENING

The "shutter" you see in the waveguide section above is designed to close automatically when the radar is not operating. This prevents damage to the crystal detector, which might be caused by radiation from other nearby radars.

Specifications called for very high attenuation when closed, extremely low attenuation when open, and fully automatic operation.

As designed and produced in quantity in our plant, the performance of this component exceeded our customer's expectations. For example:

with the solenoid-actuated shutter in closed position, attenuation is greater than 40 db,

with shutter open, attenuation is negligible—a few hundredths of one db.

This is a typical example of the work we are set up to handle—from design through production—from single component to entire transmission line. Although our engineering staff, laboratories, and fully equipped shop are usually busy on government contracts, our unusual facilities may permit us to work with you on special components for military microwave systems. We shall be happy to talk with you about your present and/or future needs.

L. H. TERPENING COMPANY

DESIGN • RESEARCH • PRODUCTION

Microwave Transmission Lines and Associated Components

16 West 61st St. • New York 23, N. Y. • Circle 6-4760

designed to supply over 30 watts of power output over the entire 152 to 174-mc range, embracing the commercial and government frequency bands. The equipment includes a grounded-grid r-f-input tube for high sensitivity; a special filter to reduce spurious emissions by at least 100 db in the band, and all other emissions and all harmonics by at least 85 db. The unit provides stability within 0.001 percent without use of oven or within 0.0005 percent with oven between 22 and 140 F.



Variable Electronic Filter

SPENCER-KENNEDY LABORATORIES, INC., 186 Massachusetts Ave., Cambridge 39, Mass. Model 300 variable electronic filter features a continuously variable cutoff within the frequency range of 20 cycles to 200 kc. Attenuation rate is 18 db per octave. Several filters can be cascaded so that attenuation rates of 36 and 54 db or more per octave can be realized. Low noise level and versatility make it an ideal research instrument for noise analysis or acoustic measurements in the automotive, aircraft, machine tool industry or general laboratory use.



Metal Fasteners

ELASTIC STOP NUT CORP., 2330 Vauxhall Road, Union, N. J. The Rollpin is an all-purpose pressed-fit

NEW

ACCURACY

1/2% RESISTORS

COMPENSATED OHMMETER CIRCUIT

LONG HAND-DRAWN MIRRORED SCALES

Designed for the engineer and technician who wants laboratory accuracy. Achieved in Model 630-A by more accurate components and hand-drawn scales that compensate for the average individual characteristic of each instrument. Also includes knife-edge pointer and mirror scale to eliminate parallax.

Model 630-A

ONLY $49.50 AT YOUR DISTRIBUTOR

FOR THE MAN WHO TAKES PRIDE IN HIS WORK

Triplett

TRIPLETT ELECTRICAL INSTRUMENT COMPANY · BLUFFTON, OHIO, U.S.A.

RCA TUBES ...

the complete line for industry

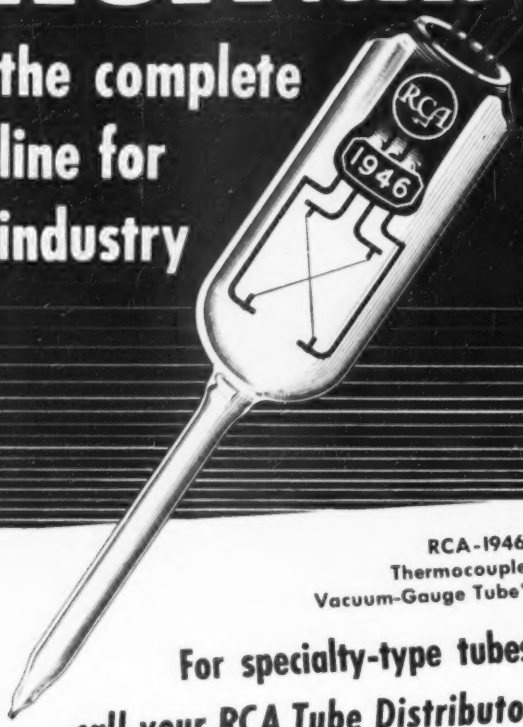

RCA-1946
Thermocouple
Vacuum-Gauge Tube*

For specialty-type tubes ...call your RCA Tube Distributor

Whether the call is for special or standard type electron tubes—or information on their use—your local RCA Tube Distributor is ready to serve your needs promptly and dependably.

*RCA Vacuum-Gauge Tubes ... include three ionization types, 1945, 1949, and 1950; a Pirani, type 1947; and a thermocouple, type 1946. Technical data sheets on these five RCA types are available without charge from your local RCA Tube Distributor.

RCA RADIO CORPORATION of AMERICA
ELECTRON TUBES HARRISON, N.J.

pin introducing a new idea of design and application in metal fasteners. A self-locking pin with chamfered ends, it was designed to replace the variety of dowel, pivot, tapered and grooved pins, which ordinarily require a key or some supplementary fastening method to hold them in place. They can be used as an important assembly in a 35-mm projector for television, as shafts for assembly of gear trains on a metering device or as shafts to mount plastic gears. They are available in 13 sizes to fit hole diameters ranging from 0.078 (5/64 in.) up to 0.500 (½ in.). The fasteners are made from SAE 1095 steel and type 420 stainless steel, and can also be furnished in beryllium copper.

Lightweight Soldering Gun

WELLER ELECTRIC CORP., Easton, Pa. Model WD-135 small lightweight soldering gun features dual spotlights to eliminate shadows and over-under terminals to brace the tip and improve visibility. Useful to radio and tv technicians, the instrument has dual heat (100 and 135 watts) for all light and delicate soldering, 5-second heating to save time and current, and trigger-switch control that adjusts heat to the work and eliminates need of unplugging the gun between jobs. A descriptive catalog bulletin is available.

Five-Inch Oscilloscope

THE TRIPLETT ELECTRICAL INSTRUMENT CO., Bluffton, Ohio. Model 3440 five-in. oscilloscope for tv and general use features an exclusive pattern reversing switch; calibrated meter for peak-to-peak volt-

Alden Components for *Plug-In Unit* Construction

ALDEN PLUG-IN BASES AND HOUSINGS

Alden has the bases, housings and sockets along with the resistor cards, tube mounts, brackets, etc. to make plug-in units of your electronic circuits, relays and other components. A whole series of bases and housings are available from the standard 7 and 9 pin layout for miniature units to the Alden Non-interchangeable 11 and 20 pin bases for larger units. The Non-interchangeable Series is designed with variable pin patterns that insure positive isolation of critical voltages or current . . . strong, stubby pins and elimination of bosses correct the bugaboos of the bent pins and broken bosses of conventional octal or loctal base design.

Open 20 pin plug-in assembly

Shielded 20 pin plug-in assembly

Shielded 11 pin plug-in assembly

Miniature 9 pin plug-in assembly



ALDEN BACK CONNECTORS

Here are back connectors that make possible slide-in chassis that go together and come apart easily. Generous bell mouthed entries and floating clip action provide wide mating tolerances — do away with critical chassis alignment problems. Wiring to color-coded back connectors instantly identifies each lead for circuit checks — makes wiring accessible for easy servicing. Can be mounted flushed or stacked to meet space requirements.

Mechanical units

Decade units

Miniature chassis

ALDEN SLIDE-IN LOCK-IN CHASSIS

Designed for quick, positive insertion and removal, slide-in lock-in chassis utilizes bullet nosed dowels which pull in, lock, and eject chassis quickly and easily. Simple ½ twist of handles gives positive lock against vibration shock in any position. Pilot action of locking dowels eliminates critical sheet metal tolerances. Slide-in lock in chassis are built for racks or as separate units, miniature or standard size.



Instrumentation

Electronic

Communication

Mobile

CAP-CAPTIVE CONVENIENCE SCREW

Concave surface of head and arced notch quickly center production tools on screw for rapid tightening against lockwasher. In the field, no special tools are necessary — arced slot in head is of such proportion that even a coin gives sufficient leverage to back it off lockwasher. Can readily be made captive, so it's ideal for holding detachable mechanical units, plug-in housings, miniature chassis.



Plug-in Units

Electrical Units

Electronic Units

Mechanical Units

MODERN ELECTRONIC DESIGN MEANS PLUG-IN UNIT CONSTRUCTION

The trend in modern design is toward smaller, lighter, better looking equipment. Yet modern design demands easy servicing, rapid changeover, and foolproof performance. To get these results, more and more modern design engineers are turning to plug-in unit construction with basic elements grouped as units that plug in, slide in, lock in, pull out easily.

Up to now there has been no one place where components specifically designed for plug-in, unit construction were available. To get this type of construction — it has been necessary for engineers to design and have parts custom made or improvise with standard components in makeshift arrangements.

For many standard applications Alden has a whole series of plug-in components that can meet many of your unitization needs. On new or special designs, we feel we have the conception and facilities necessary to take your whole problem — to design, develop and manufacture plug-in components tailored to fit your needs — to give you the advantages of components specifically designed for plug-in unit construction, advantages not found in standard components.

Write for new booklet on "Components for Plug-in Unit Construction."

ALDEN PLUG-IN UNIT CABLING

For years cabling did not keep pace with the speed of electronic design — Manufacturers had to be satisfied with cables designed as an afterthought — cabling utilizing mongrel connectors and wire, designed for a job, yes, but not designed for a specific job. In the past this poorly designed cabling has led to malfunctions, time delays, excessive production costs and high service cost in the field.

With today's higher voltages, frequencies, and critical signals, more and more engineers are turning to Alden for the solution to their cabling problems because ***Alden's is the one place where specially designed connectors and large stocks of wire are obtainable under the same roof.***

Here is what Alden engineers can do for you — take your prototype model, engineer to your specific requirements unit cables incorporating Alden's 20 years of technical design and development of connectors and wire services — give you economic and efficient cables of good appearance that are built as units — allow instant continuity checks and rapid replacement in the field.

Alden's series connectors enable the engineer to select, and know that he will get, the right connector for the job. For critical connections, Alden has special non-interchangeable connectors with plugs that can only mate with the correct socket and thereby absolutely prevent mismating and the costly damage of burned out sets. All connectors used have forward connected, low resistance contacts which provide individual strain relief for each lead. Production design connector bodies with well-isolated clip and wire pockets provide 100% insulation. Less material — less space, features of Alden top connected contact connectors, allow Alden to design and produce a cable that is more compact and more easy to handle.

Wire is supplied from stock that include sizes and insulation of any type. It is ready to be formed, laced, braided, or shielded — in production quantities — as needed. By pooling wire requirements, a flexible high-speed braiding department, special tools, trained operators and mingling of orders, the most exacting schedules of customers can be met at production line cost.

For quotations or suggestions about design, submit your inquiries or blueprints — Alden engineers are always ready to work with you on cabling problems.

NA-ALD

ALDEN PRODUCTS COMPANY

117 NORTH MAIN STREET, BROCKTON 64E, MASSACHUSETTS

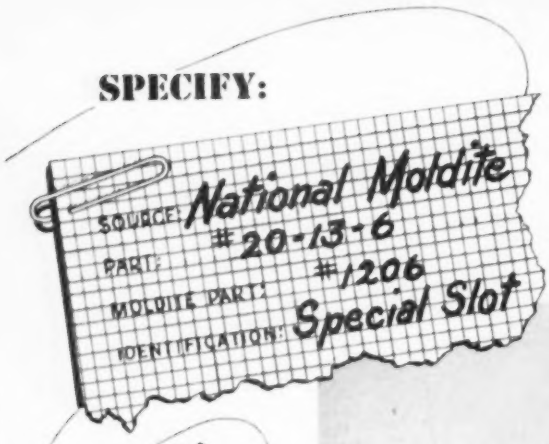

Precision Controlled

Cores For Every



Electronic Use

Samples promptly submitted upon request for design, pre-production, and test purposes.

SEND FOR CATALOG 106

. . . on the principle that it costs less to work with the finest!

NATIONAL MOLDITE COMPANY

1410 CHESTNUT AVE., HILLSIDE 5, N. J.

Jerry Golten Co.
2750 W. North Ave.
Chicago 22, Ill.

Perlmuth Colman & Associates
1335 South Flower
Los Angeles, Cal.

(Northern N. Y.)
Martin P. Andrews
Garden City, N. Y.

Jose Luis Pontet
Cordoba 1472
Buenos Aires

age measurements; vertical sensitivity of 0.009 rms volt per inch; linear sweep voltages up to 60 kc; and a frequency range from 20 cycles to over 1 mc. A demodulator probe is also available for signal tracing.

D-C Power Supply

FREED TRANSFORMER CO., INC., 1718–36 Weirfield St., Brooklyn 27, N. Y., has introduced the No. 1170 stabilized power supply intended for use as a d-c supply with the company's incremental inductance bridge No. 1110. It provides 4 continuously variable current ranges: 5 ma, 25 ma, 100 ma and 500 ma. Maximum output voltage is 270 v d-c. Noise level is −92 db.

Oscillograph Tube

RADIO CORP. OF AMERICA, Harrison, N. J. Model 7MP7 is a seven-inch, directly viewed, c-r tube of the magnetic deflection and magnetic-focus type intended primarily for use in radar indicator service, but also usefil in general oscillographic applications where a temporary record of electrical phenomena is desired. It uses a long-persistence, cascade (two-layer) screen, which exhibits bluish fluorescence of short persistence and greenish-yellow

PREMAX

THE FASTEST SELLING
Ground Rods

For TV
AND OTHER INSTALLATIONS

With a new quick-acting, time-saving clamp that insures positive contact on #4 to #14 gauge conductor. 3/8-inch solid steel rods, copper plated and pointed for easy driving. Available in 4 and 6-foot lengths. Also 1/2-inch rods in 5, 6 and 8-foot lengths.

At your Jobber

PREMAX PRODUCTS
DIVISION CHISHOLM-RYDER CO., INC.
5101 Highland Ave. Niagara Falls, N. Y.

TOP QUALITY AT LOW COST

Plays 10½" Reels!

Complete, for console installation with single or dual track heads: **$345.00**

Concertone

■ The *professional quality* tape recorder you have been waiting for! NAB standards; triodes throughout; 40-15000 cycles at 15", 40-8000 cycles at 7½". Three motors; flutter less than 0.1%; signal-to-noise better than 50 db. Three heads for simultaneous erase, record, playback. Quick change from single to dual track. *Write for booklet.*

FISHER RADIO CORPORATION · *Distributors* · 45 E. 47th St., N. Y.

HERE'S BIG HELP IN TERMINAL WIRING!

The correct wire to correct terminal every time!

The New
JONES FANNING STRIP

Connections are made through Fanning Strip, on bench or anywhere apart from barrier strip, and quickly slipped into assembly.

Use with Jones Barrier Terminal Strips, Nos. 141 and 142, for 1 to 20 terminals.

Simplifies soldering. Insures correct connections. Saves time. Ideal for harness or cable assembly. Brass terminals, cadmium plated. Bakelite mounting. Send for complete data.

Jones — HOWARD B. JONES DIVISION
CINCH MANUFACTURING CORPORATION
CHICAGO 24, ILLINOIS

RADAR AND SONAR ENGINEERS

Supervisory Radar Engineer

1. Position open for top-notch radar engineer to supervise project engineers in the development and production engineering of airborne radar equipment.

Radar Engineers

2. Positions open for project, senior and junior radar engineers. Experience in airborne radar desired.

Sonar Engineers

3. Positions open for engineers with background and experience in the field of sonar.

Salary commensurate with ability and experience. Excellent opportunity for suitably qualified personnel.

Submit detailed resumé.

Attention
CHIEF ELECTRONIC ENGINEER

Pacific Division
Bendix Aviation Corporation
NORTH HOLLYWOOD, CALIF.

Easy Accessibility!

JOHNSON 147-800 SERIES
WITH DETACHABLE SOCKETS

This popular series permits bulb installation from front or from rear by means of a detachable spring bracket. Jewel is 1" diameter in friction type holder with polished chrome bezel. Available in red, green, amber, blue, opal or clear with miniature screw socket, candelabra screw socket or miniature bayonet socket. Choice of faceted or smooth jewel. All fit 1" hole.

JOHNSON carries in stock a complete line of standard light assemblies to meet every ordinary need. Special assemblies, to meet your most exacting requirements, can also be furnished in production quantities on special order. Your inquiries are invited.

JOHNSON
E. F. JOHNSON CO. WASECA, MINN.

STANCOR TRANSFORMERS

Specified as original components by the biggest radio and TV set makers in the industry. They have to be good!



WRITE.
inquiries promptly answered

STANCOR

STANDARD TRANSFORMER CORPORATION
3578 ELSTON AVENUE, CHICAGO 18, ILLINOIS

FREE Send for **ALLIED'S NEW 1951 CATALOG!**

- **ELECTRONIC SUPPLIES for INDUSTRY**
- **BROADCAST STATION SUPPLIES**

World's Largest Stocks • Complete Expert Service from One Central Supply House

Simplify your purchasing problems—send your consolidated orders to ALLIED—the single, complete source for all electronic supplies. Rely on ALLIED for the world's largest stocks of parts, tubes, test instruments, audio equipment, accessories—complete quality lines of electronic supplies ready for immediate shipment from stock. ALLIED'S expert Industrial and Broadcast Station supply service saves you time, effort and money. Send today for your FREE copy of the 1951 ALLIED Catalog—the only complete guide to electronic supplies for industrial and broadcast station applications.

212 PAGES. Equipment for Research, Development, Maintenance and Production Operations

ALLIED RADIO CORP.
833 W. Jackson Blvd., Dept. 11-L-0 • Chicago 7, Illinois

Send for 1951 ALLIED CATALOG

Everything in Electronics from ONE Source

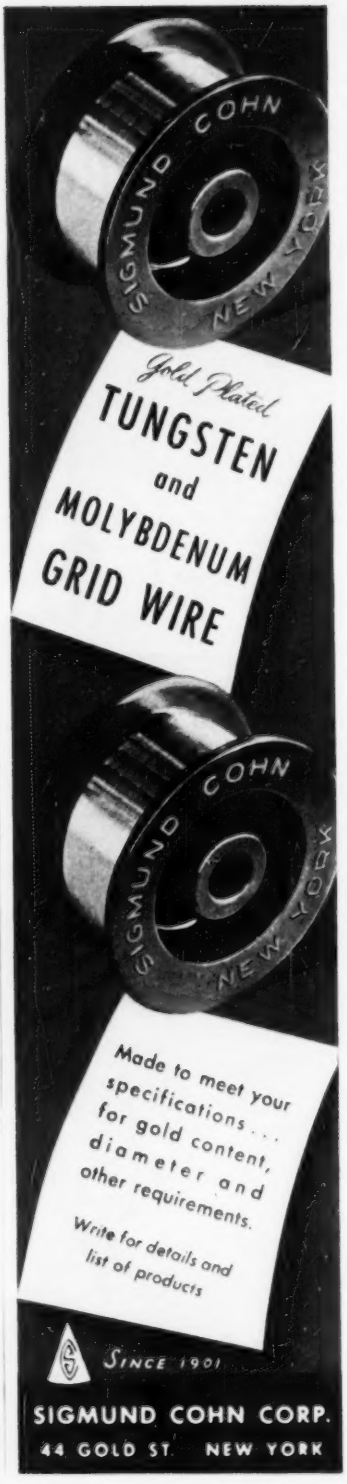

phosphorescence, which persists for several minutes. An eight-page bulletin now available gives full description including characteristics charts, dimensional outline and socket connections.



Mass Spectrometer Tube

GENERAL ELECTRIC CO., Schenectady 5, N. Y. The ion resonance mass spectrometer tube illustrated was designed for high-precision measurements in special analysis problems. Approximately 150 volts d-c and r-f voltages of about 1 volt at frequencies up to 5 mc are employed. The tube has a glass envelope and requires a magnet with a 1-in. gap and a field strength of several thousand gauss.

Q Indicator

FREED TRANSFORMER CO., INC., 1718-36 Weirfield St., Brooklyn 27, N. Y., have introduced the No. 1030 low-frequency Q indicator designed specifically to measure the Q factor of coils. It can also be used to measure inductance, distributed capacitance, impedances and dielectric losses. The Q range is from

"Sound" Research Develops a BETTER PRODUCT!

with Magnecord Tape Recordings

Research departments have found a better way to take notes on electronic data and noise... They record the actual sounds on magnetic tape using Magnecord tape recorders exclusively.

Magnecorders are sturdy and give perfect reproduction under the most difficult conditions. Light-weight — one man can carry a Magnecorder anywhere!

Moderately priced for every industrial application. Find out how "Sound" Research can help improve your product.

HIGH FIDELITY • 50 to 15 KC

No other recorder offers such a wide frequency range at such a low price. Special models to fit your special needs for

NOISE ANALYSIS VIBRATION TESTS
SOUND IMPULSES TELEMETERING

Write for complete specifications

Send me further information on Magnecorder tape recordings for industrial uses.

Name .....

Company .....

Address .....

City ..... Zone ..... State .....

SEND THIS COUPON TODAY!

Magnecord, INC.

Dept. E11 360 N. MICHIGAN AVE. • CHICAGO 1, ILL.

STANDARDIZE ON Standard • STANDARDIZE ON Standard • STANDARDIZE ON Standard • STANDARDIZE ON Standard

Eliminate CRYSTAL TEMPERATURE CONTROL COSTS . . .



Now you can forget temperature control. Just specify Standard's Type 20 Crystal Unit for your products.

In addition to lowering power requirements and weight, it increases compactness, durability and dependability. Type 20 meets all Government specifications, too.

Discover how the Standard Type 20 can cut costs and increase sales for you. A letter will bring Engineering data and complete details by return mail.

Standard Piezo COMPANY
CARLISLE, PENNSYLVANIA

What the 'SCOPE shows...

RAHM Oscillograph RECORDS . . .
instantly, accurately, for immediate analysis!

Specifications: 1-2-4 or 6 CHANNELS
Sensitivity: 3 volts/mm 0.9 ma/mm
Freq. Response: Flat, 0-70 cps. Down ½ at 140 cps.

- IT'S NEATER! Noink required . . . no pens to clean. Records dry on non-blurring, heat sensitive DURATAPE. It's handier! Controls easily accessible. Paper supply always visible . . .
- VERSATILE . . . Records strains, vibrations, temperatures, freq. displacement, radiation, synchronization.

Folder on request

RAHM INSTRUMENTS, Inc.
12 West B'way, N. Y. 7, N. Y., BArclay 7-3817

For *Precision* Washers...For *Precision* Stampings...

WHITEHEAD STAMPING CO.
A preferred source of precision-made WASHERS and STAMPINGS. 46 years of experience and up-to-the-minute facilities, assure highest quality and service.

EST. 1903 **WHITEHEAD STAMPING CO.**
1691 W. Lafayette Blvd. Detroit 16, Michigan

NOW!
SPEED UP ALL SOLDERING WITH
UNGAR
FEATHER-LIGHT SOLDERING PENCILS WITH
HI-HEAT
INCREASED WATTAGE
TIPS

For use with No. 776 Handle & Cord Set

Stop wrestling with *big* irons. New HI-HEAT TIPS in your Ungar Electric Soldering Pencil produce a really versatile tool that'll perform on a par with the big, bulky 100-150 watt irons. If you can't get immediate delivery, please be patient, for production hasn't yet caught up with demand. Ask your supplier for No. 1236 Pyramid or No. 1239 Chisel. List price, $1.25 each.

Ungar ELECTRIC TOOL CO., Inc.
LOS ANGELES 54, CALIFORNIA

Pioneer in Radio Engineering Instruction Since 1927

CAPITOL RADIO ENGINEERING INSTITUTE
An Accredited Technical Institute



ADVANCED HOME STUDY AND RESIDENCE COURSES IN PRACTICAL RADIO-ELECTRONICS AND TELEVISION ENGINEERING

Request your free home study or resident school catalog by writing to:

DEPT. 2811B
16th and PARK ROAD, N. W.
WASHINGTON 10, D. C.
Approved for Veteran Training

0.5 to 500. Frequency range is from 20 cycles to 50 kc.

Count Rate Meter

NUCLEAR INSTRUMENT AND CHEMICAL CORP., 229 W. Erie St., Chicago 10, Ill. Model 2611 count rate meter for checking electromagnetic radiation in hospitals and laboratories is battery operated. Probe has a thin mica end window with a density of 1.4 milligrams per sq cm. The meter at one end of the unit reads directly in counts per minute and, for gammas, in milliroentgens per hour. For monitoring large quantities of radiation, the instrument is provided with three ranges and a selector switch, permitting choice of 0.2, 2 or 20 milliroentgens per hour full scale.

Wide-Band Oscilloscope

TELEVISION EQUIPMENT CORP., 238 William St., New York 7, N. Y. Model T-601-A oscilloscope is a general-purpose high-quality cro, which has been designed for laboratory engineering use. It features 17 tubes including 5-in. crt, 10-mv

WARD

for ★ HIGH ELECTRICAL EFFICIENCY
★ RUGGED MECHANICAL CONSTRUCTION
★ LOW COST PRODUCTION

Hundreds of Companies depend on Ward to Design Special Antennas in every conceivable application

You can find the answer to any special antenna problem right at WARD. As an exclusive manufacturer of antennas, Ward concentrates on aerials. Being the oldest and most experienced, Ward has the facilities and knowledge to engineer the answer to any antenna problem.

Whether you require one or thousands of special antennas, Ward's complete engineering facilities are at your service. Just write or wire or phone.

THE WARD PRODUCTS CORP.
Division of The Gabriel Co.
1523 EAST 45th STREET
CLEVELAND 3, OHIO

only WARD OFFERS ONE SOURCE FOR SPECIAL COMMUNICATION TV-FM-AM and AUTOMOTIVE ANTENNAS

The Oldest and Largest Exclusive Manufacturer of Antennas

Don't Overlook the LECTROHM FERRULE TERMINAL RESISTOR

Perhaps the most dependable resistor you can use. *Convenient*—it slips tightly into place with perfect contact. *Trouble-free*—ferrules are of monel metal and therefore non-oxidizing and non-corrosive. Windings are permanently *silver soldered* to ferrules. All parts are integrally embedded in vitreous enamel—a lifetime construction. Tube ends are left open for *thru-ventilation*.

Seven standard sizes, ranging from 13 to 190 Watts, available from stock.

Write for Bulletin #99 illustrating this and many other Lectrohm quality resistors

LECTROHM

5903 Archer Avenue Chicago 38, Ill.

Division of
The National Lock Washer Co., Newark, N. J.

Unless the Dry Battery You Need Is Listed in This Free Manual...

BURGESS ENGINEERS WILL DESIGN A NEW BATTERY TO MEET *YOUR* SPECIFICATIONS



It's all part of the Burgess Service! This complete Engineering Manual lists *hundreds* of battery types developed by Burgess Engineers to meet new requirements. If the specific battery you need is not among them, the complete Burgess facilities, design, production, and engineering will be placed at your disposal to build the battery you need in any quantity —large or small!

Write for ENGINEERING MANUAL and CHECK SHEET

No obligation. By return mail you will receive the FREE Engineering Manual listing the complete line of Burgess Batteries together with specifications; also the Burgess "Check Sheet" on which you may outline your requirements in the event that the battery you need has not already been developed. Address:

BURGESS BATTERY COMPANY
(DEPT. E1) FREEPORT, ILLINOIS

Watch This Spot!

for PICTORIAL NEWS OF THE WORLD'S FINEST HERMETIC SEALS

● NOVEMBER, 1950 ●

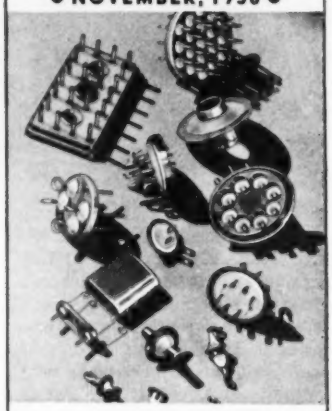

Quality plus unlimited shapes

The only seals you can hot tin dip at 525°F. for easy assembly soldering, for a strain and fissure-free sealed part with resistance of over 10,000 megohms!

Hermetic headers withstand high vacuum, high pressure, temperature cycling, salt water immersion and spray etc., and are used extensively by America's leading industries and government agencies.

TERMINALS AND HEADERS ARE AVAILABLE IN RMA COLOR CODE

Free!

Write for your copy of the most complete catalog ever produced on hermetic seals.

HERMETIC SEAL PRODUCTS COMPANY
31-33 So. Sixth St., Newark 7, N.J.

sensitivity, continuously variable calibrator and sweep magnification to five times screen size.



Coil Checker

CLOUGH BRENGLE CO., 6014 Broadway, Chicago 40, Ill. Model 301A coil checker combines a vtvm, a calibrated variable capacitor and an amplifier tube into a single instrument. When coupled with any r-f oscillator the unit measures inductance, distributed capacitance and the Q of any inductor, as well as the capacitance of mica capacitors.



Dual Voltage-Regulated Power Supply

KEPCO LABORATORIES, INC., 149-14 41st Ave., Flushing, N. Y. Model 510 features two completely independent voltage-regulated power supplies. Each d-c output voltage is continuously variable from 200 to 500 v, 0 to 200 ma. For all output voltages the output voltage variation is less than 0.5 percent for both line fluctuation from 105 to 125 v and load variation from minimum to maximum current. Ripple voltage is less than 5 mv. Each a-c output is 6.3 v, 6 amperes, center-

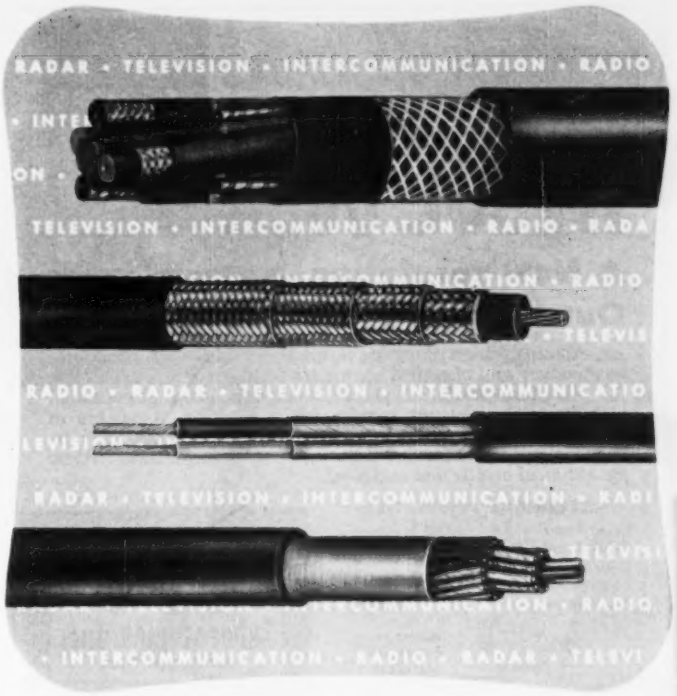
RADAR • TELEVISION • INTERCOMMUNICATION • RADIO
TELEVISION • INTERCOMMUNICATION • RADIO • RADA
RADIO • RADAR • TELEVISION • INTERCOMMUNICATIO
RADAR • TELEVISION • INTERCOMMUNICATION • RADI
• INTERCOMMUNICATION • RADIO • RADAR • TELEVI

For special cables go to specialists

. . . Rome Cable

Electronic wiring components must conform to exacting specifications for quality performance. This is particularly true in high frequency applications where sensitive and dependable operation is so important. Leading manufacturers turn to Rome Cable for their electronic needs . . . because they *know* their specification requirements will be met *exactly*.

Rome Cable has the facilities, experience and engineering "know-how" to produce complicated special cables of the highest quality, utilizing both rubber and thermoplastics, typical examples of which are shown above. This, coupled with a complete line of Underwriters' Approved standard radio and television hook-up wires (including military types), makes Rome your best source of supply. The coupon below will bring you descriptive literature. Mail it today.

IT COSTS LESS TO BUY THE BEST

ROME CABLE CORPORATION
Dept. E-11 • Rome, N. Y.

Please send me information on Electronic Wiring.

Name .....
Company .....
Address .....
City ..... State .....

ROME CABLE CORPORATION
ROME, NEW YORK

Arc Resistance 135 SECONDS

HYSOL 6000

For Screw Machine Components, Gears and Punched Press Parts

A New Insulating Material with Outstanding Electrical Properties

An extremely high dielectric strength coupled with resistance to moisture and chemical attack make this new material ideal for electrical insulation. Hysol 6000 has good dimensional stability and does not require fabric backing. Available in rod, tube, sheet and casting resin form, Hysol 6000 may be exposed to 140° C for 100 days without embrittlement. *Write for technical details and samples.*

ELECTRICAL PROPERTIES

Power Factor	0.005 at 60 cycles
Dielectric Constant	3.70 at 60 cycles
Loss Factor	0.009 at 60 cycles
Dielectric Strength	350 volts/mil.
Arc Resistance	135 seconds



PLANTS AT OLEAN, AND SMETHPORT, PA.

houghton laboratories, inc.
OLEAN, NEW YORK

The New STAVER MINI-SHIELD

TRADE MARK REG. AND PAT. PEND.

The shield that fits all Miniature Tubes

A flexible shield that snugly fits all miniature tubes because it compensates for all variations in tube dimensions. Mini-Shields are made for both T5½ and T6½ bulb tubes. Send for catalog sheet.

THE Staver COMPANY INCORPORATED

91 PEARL ST. • BROOKLYN 1, N. Y.
ULSTER 5-6303

FOR ORIGINALITY LOOK TO XCELITE

Now — 13 Tools For Nut Driving And Screwdriving — In This $10.95 Kit!

In the "99" durable plastic kit, we've replaced the reamer with the #1 and 2 Phillips reversible blade AT NO EXTRA COST. So you get 9 nut drivers and 4 screwdrivers (2 Phillips, 2 regular)! ASK YOUR SUPPLIER! NOTE: THIS SAME "99" SET IN METAL CONTAINER WILL AGAIN BE AVAILABLE AS SOON AS SHEET METAL BECOMES OBTAINABLE.

Quality Tools PREFERRED BY EXPERTS

PARK METALWARE CO., INC.
Dept. C Orchard Park, N. Y.

Canadians Send Orders Direct to: Chas. W. Pointon, Canadian Warehouse Distributor, 1926 Gerrard St., E. Toronto, Ont.

SPECIALTY

LAB-BILT DRY BATTERIES

INDUSTRY

Write for New FREE CATALOG

LABORATORY

RADIO AND IGNITION

Here are complete descriptions of 78 Lab-Bilt Batteries of industrial and hard-to-get types. Specification Sheet enables you to order batteries especially designed to your own requirements. No order is too small. Specialty makes and ships FRESH Lab-Bilt Batteries without delay. Get this new catalog today.

SPECIALTY BATTERY COMPANY
Ray-O-Vac RAY-O-VAC Subsidiary
MADISON 10, WISCONSIN



SMALL PARTS

Filaments, anodes, supports, springs, etc. for electronic tubes. Small wire and flat metal formed parts to your prints for your assemblies. Double pointed pins. Wire straightened and cut diameter up to ¼-inch. Any length up to 12 feet.

LUXON fishing tackle accessories.

Inquiries will receive prompt attention.

ART WIRE AND STAMPING CO.

227 High St. Newark 2, N. J.

tapped, unregulated. Power requirement is 600 watts. The d-c outputs may be used separately in parallel, in series, and bucking.

Mobile Combination

GENERAL ELECTRIC CO., Syracuse, N. Y. Mobile combination 204 is a 50-watt unit for use in the 148 to 174-mc band. It features easily adjustable tuned circuits having triple-tuned transformers and a built-in low-pass harmonic filter in the antenna output circuit which attenuates harmonics at least 70 db. Receiver circuit elements provide better than 100-db adjacent-channel selectivity. Standby battery drain for the new unit is 11 amperes at 6.3 v and transmit drain is 60 amperes at 6.3 v.



Spectrum Analyzer

ROBERT R. WATERS, INC., 4 Gordon St., Waltham 54, Mass. The Vectron spectrum analyzer has been engineered to avoid obsolescence by making provisions for rapid interchange of r-f heads that will provide coverage of the microwave spectrum to 30,000 mc. The unit features a functionally designed housing incorporating a 5-in. c-r

If you use any of these . . .

LIBERTY MIRROR can help you

- Aluminum First Surface Mirrors
- Chromium First Surface Mirrors
- Gold First Surface Mirrors
- Silver Second Surface Mirrors
- Gold Second Surface Mirrors
- Aluminum Second Surface Mirrors
- Copper Second Surface Mirrors
- Metallic Second Surface Mirrors
- Neutral Filters
- Transparent Mirrors
- Beam Splitters (low or no light absorption loss)
- Beam Splitting Dichroic Mirrors
- Beam Splitting Dichroic Filters
- Metallic Electrical Conducting Coatings
- Transparent Electrical Conducting Coatings
- Beam Splitters or Dichroic Mirrors with Transparent Electrical Conducting Coatings
- Low Reflection Coatings

Whether you use these singly or in large quantities, Liberty's research and production facilities are at your service. We operate the largest thermal vacuum evaporation department in the world, staffed with men trained through long experience in mass production by the vacuum process.

If you have new uses or experimental applications of vacuum deposited coatings, you can expect the same careful attention to an order for "one of a kind" that you would ask for thousands of units. Our research technicians stand ready to help you find the right solution to your special problems. Your inquiries are invited—use the handy coupon, below.

SEND FOR INFORMATION

LIBERTY MIRROR DIVISION,
LIBBEY • OWENS • FORD GLASS CO.,
L1115 NICHOLAS BUILDING,
TOLEDO 3, OHIO

I am interested in your Liberty Vacuum Deposited Coatings Products. Please send additional information on

(Type of Vacuum Deposited Coating Product)

☐ Please have salesman call.

Name Title

Company

Address

City Zone State

LIBERTY VACUUM DEPOSITED COATINGS

Liberty Mirror Division

LIBBEY • OWENS • FORD GLASS CO.
NICHOLAS BUILDING, TOLEDO 3, OHIO

VIBRATORS!
By every test
ATR
is Best!
ATR
AUTO RADIO
VIBRATORS
have Ceramic Stack Spacers

Free
ATR VIBRATOR GUIDE

A COMPLETE LINE OF VIBRATORS . . .
Designed for Use in Standard Vibrator-Operated Auto Radio Receivers. Built with Precision Construction, featuring Ceramic Stack Spacers for Longer Lasting Life. Backed by more than 19 years of experience in Vibrator Design, Development, and Manufacturing.
ATR PIONEERED IN THE VIBRATOR FIELD.
✓NEW MODELS ✓NEW DESIGNS ✓NEW LITERATURE
"A" Battery Eliminator, DC-AC Inverters, Auto Radio Vibrators
See your jobber on write factory
ATR
AMERICAN TELEVISION & RADIO CO.
Quality Products Since 1931
SAINT PAUL 1 MINNESOTA—U.S.A.

Only with CO-AX
air-spaced articulated
R.F. CABLES
4mmf/ft
Patents Regd Trade Mark

THE LOWEST EVER CAPACITANCE OR ATTENUATION

We are specially organized to handle direct enquiries from overseas and can give

IMMEDIATE DELIVERIES FOR U.S.A.

Billed in Dollars Settlement by your check. Transaction as simple as any local buy.

TRANSRADIO LTD
CONTRACTORS TO H.M. GOVERNMENT
138A CROMWELL ROAD · LONDON SW7 ENGLAND
CABLES TRANSRAD LONDON

LOW ATTEN TYPES	IMPED OHMS	ATTEN db/100ft at 100 Mc/s	LOADING ft per Mc/s	OD"	
A1	74	1.7	0.11	0.36	
A2	74	1.3	0.24	0.44	
A34	73	0.6	1.5	0.88	HIGH POWER FLEXIBLE
LOW CAPAC TYPES	CAPAC mmf/ft	IMPED OHMS	ATTEN db/100ft 100Mc/s	OD"	
C1	7.3	150	2.5	0.36	
PC1	10.2	132	3.1	0.36	PHOTOCELL CABLE
C11	6.3	173	3.2	0.36	
C2	6.3	171	2.15	0.44	
C22	5.5	184	2.8	0.44	
C3	5.4	197	1.9	0.64	
C33	4.8	220	2.4	0.64	V.L.C. ★
C44	4.1	252	2.1	1.03	

★ Very Low Capacitance cable

CORRECTION

RE: CORES, HIGH PERMEABILITY MAGNETIC
CORES, IRON
CORES, POWDERED IRON
CORES, SLUG TUNING UNITS

Your attention is called to the omission in the above listings of the following:

NATIONAL MOLDITE COMPANY

1410 CHESTNUT AVE • HILLSIDE 5, N. J.

in the 1950 Mid-June Electronics Buyers' Guide

See this Company's advertisement on page 200 in the Buyers' Guide

Please make this correction on page D-36 of the Directory Section of your Buyers' Guide issue.

tube indicator with a mounting that permits convenient use of a 35-mm camera for recording information from the c-r tube.

Sealed Relay

ADVANCE ELECTRIC AND RELAY CO., 2435 North Naomi St., Burbank, Calif. Part 8744–1 small hermetically sealed relay features three-stud mounting and solder lug terminals. It is designed for a variety of commercial, industrial, portable and military applications in various electronic equipments. The enclosure will accommodate three-ampere-rated relays in contact combinations up to and including 4 pole-double throw. Measurements are 1⅝ in. x 1⅝ in. x 1⅞ in. high.

Geiger-Counter Kit

SCIENCE KITS, LTD., 5514 Hollywood Blvd., Hollywood 28, Calif., has developed the Searchmaster Kit containing everything needed to assemble a high-quality Geiger

Thousands of America's ENGINEERS must be right!

NEW EICO instruments and KITS give you Laboratory Precision at Lowest Cost!

5" Push-Pull Oscilloscope
Model 425-K, Kit, $39.95
Model 425, factory wired, $69.95

Vacuum Tube Voltmeter
Model 221-K, Kit, $23.95
Model 221, factory wired, $49.95

High Voltage Probe,
Model HVP-1, $6.95



Deluxe RF Signal Generator
Model 315-K, Kit, $39.95
Model 315, factory wired, $59.95

It's smart engineering sense to cut your test equipment costs—without sacrificing quality. That's why more engineers than ever before are building their own precision instruments with EICO Kits.

For top-notch laboratory-precision equipment, EICO gives you the newest efficient designs and circuitry and the finest quality brand-name electronic and mechanical components. Each EICO Kit is complete with pre-punched chassis, cabinet and etched panel. For rock-bottom cost, you do the simple assembly in one easy evening with the EICO simplified instructions.

EICO Kits and Instruments are acclaimed and used by the top-flight universities, schools and original equipment manufacturers from coast to coast. See the complete EICO line of superlatively engineered, handsome VTVM's, scopes, tube testers, signal and sweep generators, etc.—at your favorite jobber TODAY. Ask him about the EICO *Make-Good* Guarantee—the strongest guarantee in the industry! Write NOW for your free latest Catalog E.

Prices 5% higher on West Coast

EICO

ELECTRONIC INSTRUMENT CO., Inc
276 NEWPORT STREET, BROOKLYN 12, N. Y.

© 1950, Electronic Instrument Co., Inc., Brooklyn, N. Y.

Check the spec YOU have to meet

✓	✓	✓	✓	✓	✓	✓
High Temp Tests	Low Temp Tests	Fungus & Humidity Tests	High Alt. Tests	Mildew Resistance Tests	Sand & Dust Tests	Explosion Proof Tests

Building equipment to test products under conditions of high and low temperature, high altitude and relative humidity is Bowser's business. Because Bowser units can simulate all conditions found on or over the earth, such tough Govt. specs as USAF 41065-B can be taken in stride. All Bowser units are self-contained and will maintain preset conditions automatically.

Why don't you take advantage of Bowser's long experience? Mail the coupon now!



High Temp Tests	Low Temp Tests	Fungus & Humidity Tests	High Alt. Tests	Mildew Resistance Tests	Sand & Dust Tests	Explosion Proof Tests

I am interested in meeting the tests checked. Send me more information.

Name _____ Pos. _____

Company _____

Street _____

City _____ Zone _____ State _____

2E

BOWSER INC.
Refrigeration Division
TERRYVILLE • CONN.

Kahle specialists in custom-built, ultra-precision ELECTRON TUBE MACHINERY

KAHLE CUSTOM-BUILDS machines to make the exact tubes you require—from big 20-inchers to tiny sub-miniature—from laboratory types to those for high-speed production. Kahle puts each unit through exhaustive trial runs in our plant to assure trouble-free operation in yours.



#1384 Button Stem Machine for Sub-Miniature Tubes

A 12-head with upper and lower moulds on every head. Dual-motor drive. Indexing by barrel cam and rollers totally enclosed in oil. The button is ¼" in diameter with five long wires. Available for any stems with any number of heads. Hand fed, but available with automatic feeds.

Production-boosting, labor-saving equipment for complete manufacture of cathode ray tubes, standard, miniature and sub-miniature radio tubes, sub-miniature tubes, fluorescent lamps, photocells, x-ray tubes, glass products.

Consultations invited
Send for our new catalog

Kahle ENGINEERING CO.
1309 Seventh Street, North Bergen, New Jersey

HEAT RESISTANT WIRES FOR EVERY APPLICATION . . .



NO___

this isn't a new design
FOR A PRETZEL

But if you have a device that requires a heating unit in this shape, try our flexible asbestos insulated unit. Write us your problem, we'll gladly supply trial samples and cost estimates.

- HEATING UNITS
- HEATING ELEMENT
- RESISTANCE LINE CORD
- THERMOCOUPLE WIRE
- ASBESTOS LEAD & FIXTURE WIRE
- INSULATED RESISTANCE WIRE
- FIBERGLAS INSULATED WIRE
- WIRE TO ANY SPECIFICATIONS

Send your electronic control, communications or appliance wiring specifications for a recommended solution by our engineers.

FOR A TRIAL ORDER OR A CARLOAD *consult*

THE LEWIS ENGINEERING CO.
Wire Division
NAUGATUCK CONNECTICUT

counter capable of detecting both beta and gamma radiation. Each set includes tubes, batteries, resistors, capacitors, sockets, type SK-1 Geiger tube, headset and a metal case 9¼ in. × 4 in. × 3½ in. A radioactive specimen is also included for demonstration purposes. Price is $29.95.

Heavy-Duty Inverters

AMERICAN TELEVISION & RADIO CO., 300 E. 4th St., St. Paul, Minn., announces a line of superheavy-duty inverters for operation on d-c input voltages ranging from 6 to 220 v, having output of 110 v a-c 60 cycles at capacities ranging from 175 watts to 1,000 watts. The line is designed especially for heavy-duty applications including tape recorders, television sets, portable transmitters and similar electronic and electrical equipment within the output capacity ranges indicated.



Transformer Winder

GEO. STEVENS MFG. CO., INC., Chicago 30, Ill. New transformer winder model 37S will multiple-wind power, audio, automotive, fluorescent ballast and similar types of coils up to 9-in. o. d. Unit has a screw feed, assuring accurate margins by eliminating the possibility of overruns. Mandrels up to 30 in. long may be used for maximum economy. Thirty or more coils can be wound simultaneously. All turns are accurately registered by a 6-in. full-vision, clock-face dial counter. Highly polished wire guide rollers

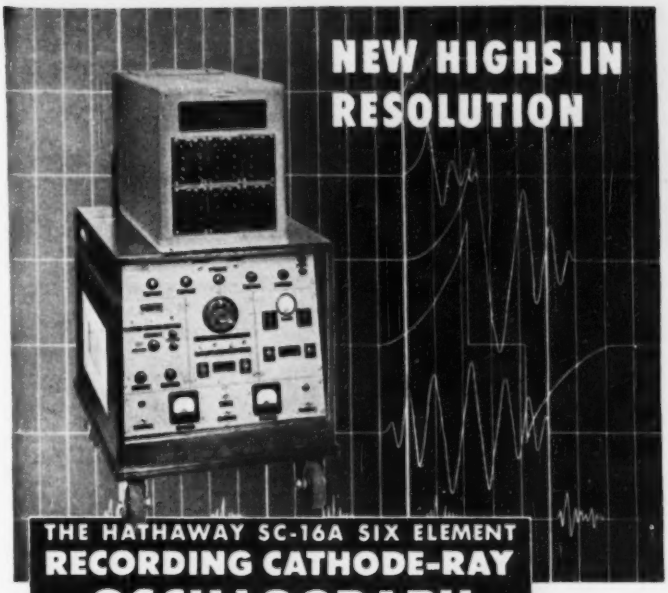

THE HATHAWAY SC-16A SIX ELEMENT
RECORDING CATHODE-RAY
OSCILLOGRAPH

NEW HIGHS IN RESOLUTION are obtained by this new oscillograph because of its unusually HIGH FREQUENCY RESPONSE and HIGH CHART SPEED...designed for recording fast transients and continuous phenomena.

FREQUENCY RESPONSE 0 to 200,000 cycles per second
RECORDS up to 1000 ft. long at speeds up to 600 inches per second
RECORDS up to 10 ft. long at speeds up to 6000 inches per second
WRITING SPEED above 100,000 inches per second

Note these additional unusual features.

- SIX ELEMENTS with convenient interchangeable lens stages for 1, 2, 3, or 6 traces on full width of chart.
- INTERCHANGEABLE RECORD MAGAZINES for CONTINUOUS RECORDING on strip chart, either 6 inches or 35mm in width up to 1000 feet in length, DRUM RECORDING for short, high-speed records, and STATIONARY CHART for very short transients.
- PRECISION TIMING EQUIPMENT, tuning fork controlled, for 1-millisecond or 10-millisecond time lines.
- Crystal-controlled Z-AXIS MODULATION for 1/10 millisecond time marks.
- QUICK-CHANGE TRANSMISSION for instantaneous selection of 16 record speeds over a range of 120 to 1.
- AUTOMATIC INTENSITY CONTROL.
- CONTINUOUS SWEEP OSCILLATOR which permits viewing as well as recording.
- Single-pulse LINEAR OSCILLATOR for recording transients on stationary film. The record can initiate the transient to be recorded, or the transient can initiate the record.

Each recording element is a complete unit, fully housed, which can be instantly inserted or removed. Recording element contains high-intensity cathode-ray tube, and both AC and DC amplifiers. Control panel is located on outside end.

FOR FURTHER INFORMATION, WRITE FOR BULLETIN 2 G1-G

Hathaway
INSTRUMENT COMPANY
1315 SO. CLARKSON STREET • DENVER 10, COLORADO

ANY SIZE

Spiral Wound **PAPER TUBES**

from .450" to 25" I.D.
from 1/2" to 30" Long

SQUARE
RECTANGULAR
TRIANGULAR
HALF-ROUND
ROUND

It pays to check your requirements with PARAMOUNT . . . because you benefit from PARAMOUNT'S coil-proved design and construction—vast range of stock arbors—wide experience in engineering special tubes! Hi-Dielectric, Hi-Strength, Kraft, Fish Paper, Red Rope, or any combination wound on automatic machines. Tolerances ±.002".

ALSO: *Shellac-Bound* Kraft paper tubing. Heated shellac forms an adhesive bond between the laminations. Absolutely moisture resistant.

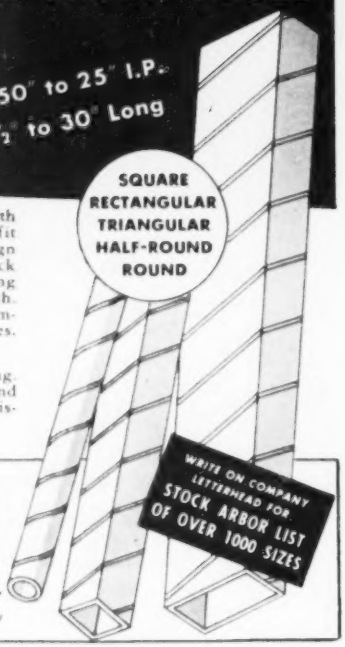

WRITE ON COMPANY LETTERHEAD FOR STOCK ARBOR LIST OF OVER 1000 SIZES

Paramount
PAPER TUBE CORP.
616 Lafayette St., Fort Wayne, Ind.
Mfrs. of Paper Tubing for the Electrical Industry

Smallest Air Variables Ever Built



JOHNSON MINIATURES SET NEW STANDARDS

New conceptions of compactness and VHF circuitry are opened with Johnson miniature variables. For TV and FM applications, laboratory and test equipment, military and other communications, many design engineers have found in them the answer to their needs.

Panel space is about the size of a penny, yet by careful design and precision workmanship nothing is sacrificed. A split sleeve bearing, beryllium copper contact spring, high insulation resistance, and other quality features assure top performance.

Three types are available: the customary Single Section, a Differential, and a Butterfly type. All have .017" plate spacing, 1250V peak breakdown. Stock sizes are as follows:

SINGLE			DIFFERENTIAL			BUTTERFLY		
	mmf			mmf			mmf	
Cat. No.	Max.	Min.	Cat. No.	Max.	Min.	Cat. No.	Max.	Min.
5MH1	5.0	1.5	5MA11	5.0	1.5	5MB11	5.1	1.5
9MH1	8.7	1.8	9MA11	8.7	1.8	5MB11	5.1	1.8
15MH1	14.2	2.3	15MA11	14.2	2.3	9MB11	8.0	2.2
20MH1	19.6	2.7	15MA11	19.6	2.7	11MB11	10.8	2.7

Ask for the Johnson Variable Condenser catalog for more complete data on these and other types.

E. F. JOHNSON CO. WASECA, MINNESOTA

Where the Requirements are Extreme . . .

Use SILVER GRAPHALLOY

For extraordinary electrical performance

GRAPHALLOY
TRADE MARK REG. U. S. PAT. OFF.

THE SUPREME BRUSH AND CONTACT MATERIAL

IN BRUSHES

- for high current density
- minimum wear

- low contact drop
- low electrical noise
- self-lubrication

IN CONTACTS

- for low resistance
- non-welding character

• SILVER GRAPHALLOY is a special silver-impregnated graphite

Accumulated design experience counts — call on us!

GRAPHITE METALLIZING CORPORATION
1055 NEPPERHAN AVENUE, YONKERS 3, NEW YORK

are ball-bearing mounted for free running. Traverse is quickly adjusted from 1 16 in. to 6 in. Unit is powered with a variable speed, uniform torque ¼-hp motor with foot-treadle control.



Amplifier

RAULAND-BORG CORP., 3523 Addison St., Chicago 18, Ill. Model 1916 Green Gem amplifier is rated 16 watts at 5 percent or less harmonic distortion (measured at 100, 400 and 5,000 cycles); 20 watts peak output. Frequency response is ± 1 db, 40 to 20,000 cps. Output impedances are 4, 8, 16, 250, 333 (70 volts), 500 ohms. Gain characteristics are as follows: For the mike —130 db (2 meg); 117 db (100,000 ohms); 117 db (150 ohms). Phono —85 db (0.5 meg). Voltage required for rated output is as follows: high impedance input—0.0015; low impedance—0.0001; phono—0.1 v.



Wave-Shaping Device

BERKSHIRE LABORATORIES, P. O. Box 70, Concord, Mass. Model 1-U Labmarker is a wave-shaping device for producing timing marks in c-r oscillography. It converts a sinusoidal input of up to 30 volts rms into a series of sharp unidirectional pulses. Approximate characteristics are: pulse duration, one-

THE HIGH FIDELITY Magnecorder

Electronic data and test sounds now are recorded for comparison and future reference on low-cost Magnecord tape recordings. Because Magnecordings capture the data as it happens, there's no human error—no lost time. . . . Records faster, cheaper, more accurately!

HIGH FIDELITY—50 to 15 kc . . . No other recorder offers such wide response at such a low price. Special models for your special needs. Write for specifications.

See How "Sound" Research Can Help Improve Your Product!

PROFESSIONAL TAPE RECORDING EQUIPMENT

for

NOISE ANALYSIS VIBRATION TESTS
SOUND IMPULSES TELEMETERING

Send me further information on Magnecorder tape recordings for industrial uses.

Name .....
Company .....
Address .....
City ..... Zone ..... State .....

Magnecord, INC.
Dept. E11 360 N. MICHIGAN AVE. • CHICAGO 1, ILL.

SEND THIS COUPON TODAY!

High Sensitivity . . Logarithmic

AC VOLTMETER

40 MICROVOLTS TO 500 VOLTS

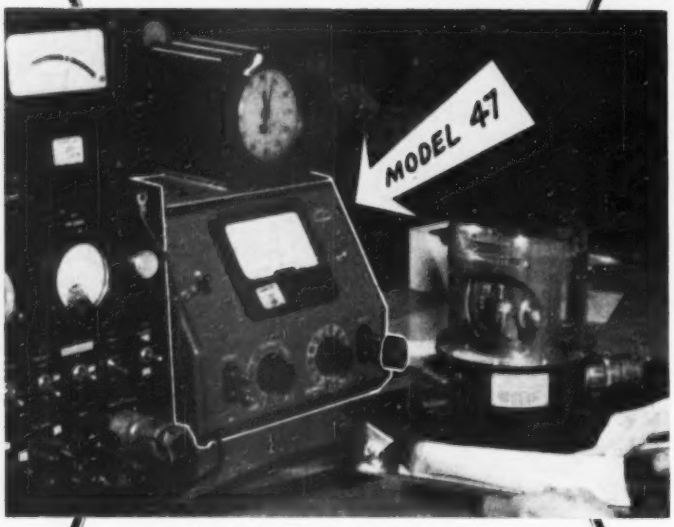

Photo shows Model 47 Voltmeter being used to test Gyrosyn Compass at Sperry Gyroscope Company, Inc.

SELF-CONTAINED
ALL AC OPERATED UNIT

An extremely sensitive amplifier type instrument that serves simultaneously as a voltmeter and high gain amplifier.

- **Accuracy ± 2% from 15 cycles to 30 kc.**
- **Input impedance 1 megohm plus 15 uuf. shunt capacity.**
- **Amplifier Gain 25000.**

Also MODEL 45
WIDE BAND
VOLTMETER
0005 to 500 Volts
5 Cycles 1600 kc

A few of the many uses:

- Output indicator for microphones of all types.
- Low level phonograph pickups.
- Acceleration and other vibration measuring pickups.
- Sound level measurements.
- Gain and frequency measurements for all types of audio equipment.
- Densitometric measurements in photography and film production.
- Light flux measurement in conjunction with photo cells.

Write for Complete Information

INSTRUMENT ELECTRONICS

45-17 Glenwood Street Little Neck, L. I., N. Y.

third of a cycle; pulse amplitude, one-half of the rms input voltage; frequency range, 25 cycles to 1 mc.

Insulation Tester

GENERAL ELECTRIC CO., Schenectady 5, N. Y., has announced a new instrument for electrical testing of insulating materials, the current-limited high-potential tester. It is designed to aid electrical manufacturing plants and service shops in testing insulation of electrical components and assemblies such as coils, relays, motors and appliances. The unit operates from a power supply of 105 to 125 volts a-c, 60 cycles.



Communications Recorder

AUDIOLOG CORP., 440 Peralta Ave., San Leandro, Calif. The Audiolog is a new recording unit especially designed for logging and monitoring radio and phone communications. An important feature is the use of a thin, flexible, reusable sleeve or tube of magnetic material upon which an entire hour of speech or code communications can be recorded. Use of the sleeve elimi-

JUST OUT!



A NEW CATALOG

. . . full of helpful, factual, cost-saving information.

It's a storehouse of facts and data—28 pages of useful information by the originators of EASY-FLO and SIL-FOS. Tells WHERE and HOW to use these silver brazing alloys to the best advantage; shows many time - tested applications; describes fast brazing techniques; tells how you can speed up production and *save*. It's a "must" for all who design or produce metal assemblies.

WRITE FOR YOUR FREE COPY TODAY. ASK FOR BULLETIN 20.

HANDY & HARMAN
82 FULTON ST., NEW YORK 7, N. Y.
Bridgeport Conn. • Chicago 11 • Los Angeles 54
• Providence 3, R. I. • Toronto, Canada
Agents in Principal Cities

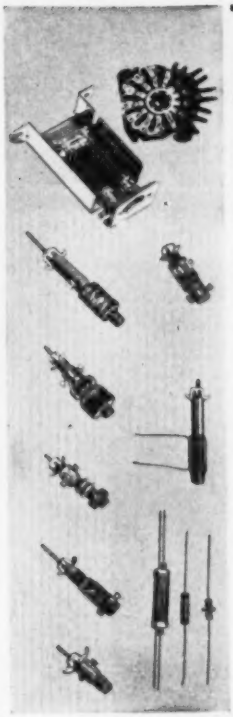

Are COILS Your BOTTLENECK?

Is the manufacture of R.F. Coils a "step-child" operation in your plant? Does it lead to snarled up production because of inadequate facilities and endless engineering detail? If so, Clippard Instrument Laboratory can help you out in a hurry!

Now at your disposal is efficient new high speed coil winding equipment of our own design, plus a staff of production and control technicians schooled in laboratory accuracy. We deliver the quality coils and sub-assemblies you want when you want them with a minimum of rejects, fuss and bother.

Call on us, like many of the biggest names in radio and television today, to free your production facilities for more important work. For intelligent help and a prompt quotation, mail your requirements, now, to Department 5E.

Clippard
INSTRUMENT LABORATORY, INC.
1125 Bank Street Cincinnati 14, Ohio
MANUFACTURERS OF R. F. COILS AND ELECTRONIC EQUIPMENT

TEC ACCEPTED

12 MC OSCILLOSCOPE
MODEL
T-601-A

- 17 TUBES INCLUDING 5" CRT.
- 10 MILLIVOLT SENSITIVITY
- 12 MEGACYCLE BANDWIDTH
- DEFLECTION PLATES AVAILABLE ON TERMINAL BOARD
- CONTINUOUSLY VARIABLE CALIBRATOR
- SWEEP MAGNIFICATION 5 TIMES SCREEN SIZE
- GOOD TRANSIENT RESPONSE
- TRIED AND PROVEN CIRCUITS
- CRT CALIBRATION GRID

WRITE FOR SPECIFICATION DATA SHEET E-1

$349.50 LIST

COMPLETE WITH LOW CAPACITY PROBE

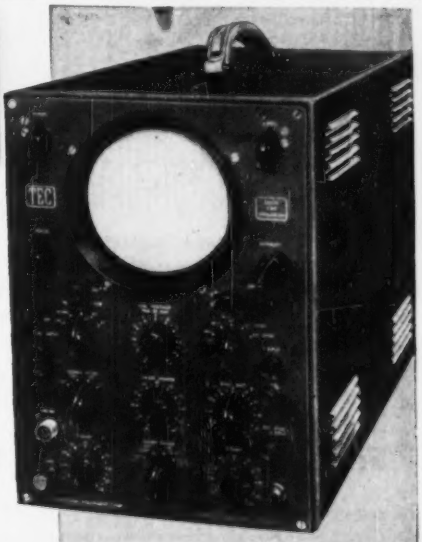

Now! A top quality engineer's oscilloscope combining ALL the features of a laboratory instrument in one convenient size, light-weight, low cost unit. Compare feature for feature with models many times the price!

TEC
TELEVISION EQUIPMENT CORP.
238 WILLIAM ST., NEW YORK 7, N. Y.
IN CANADA: THE AHEARN & SOPER CO. LTD. OTTAWA

PRECISION
RECORDING WITH THE
Variplotter

The Model 205 Variplotter, highlighting accuracy, speed, and versatility, brings to industry and laboratory a new tool with a wide field of application. This instrument will present on a 30-inch square plotting surface a precise graphic representation of one variable as a function of another variable, requiring only that the variables be expressed by d-c voltages.

ACCURACY The static accuracy is .05 percent of full scale at 70° F. The dynamic accuracy averages .05 percent of full scale plus the static accuracy at a writing speed of 8½ inches per second.

SENSITIVITY The standard sensitivity of the Variplotter is fifty millivolts per inch with other ranges of sensitivity available.

RESPONSE The maximum pen and arm accelerations are 350 and 150 inches per second squared, respectively. Slewing speeds of both pen and arm are 10 inches per second.

The Variplotter may be adapted for special use by the addition of accessories selected from our standard line—such as multiple variable conversion kits, low-drift d-c amplifiers, analog computer components, or components designed for your specific need.

YOUR INQUIRIES ARE CORDIALLY INVITED

ELECTRONIC ASSOCIATES, INC.
LONG BRANCH NEW JERSEY

nates the usual spooling and reeling. The sleeves can be telescoped so that a 24 hour log can be filed as a compact unit. Tests indicate that they will retain the recording indefinitely.

Mercury Battery

P. R. MALLORY & CO., INC., North Tarrytown, N. Y. Type RM-1C mercury A battery is suitable for applications in miniature radios, hearing aids, meters, instruments and penlights. At a current drain of 250 ma service life is indicated to be approximately 10 hours, depending upon required minimum voltage. It has an extremely constant voltage discharge rate, long shelf life and resistance to extremes of temperature, pressure, shock and humidity.

Counter Tachometer

POTTER INSTRUMENT CO., INC., 115 Cutter Mill Road, Great Neck, N. Y., announces its new electronic counter tachometer for high-accuracy revolution and frequency measurements. This unit can be used to measure frequencies up to 100,000 cycles with an accuracy of ± 1 cycle. The instrument sums the number derived from the source being measured during a precisely established time interval of 0.6 sec, the interval being determined by counting 60,000 cycles of the 100-kc

"We have found Metex Electronic Gaskets excellent for HF currents inexpensive to assemble."
Sylvania Electric Products Inc.

Sylvania has been using Metex gaskets for over a year as conductive shields for their TR tubes used in radar and micro-wave ranging equipment.

To quote their experience: "We have found Metal Textile knitted wire gaskets excellent for conducting high frequency currents without boundary arcing. The gaskets are resilient, and yet do not deform too readily. Best of all, the material is inexpensive to assemble through soft soldering techniques."



A Sylvania Electric TR tube showing Metex gasket loose and in position

The properties—electrical and physical—which make Metex Electronic Gaskets effective in this, and other demanding HF and UHF applications are due to their being made from *knitted* (not woven) wire mesh. The hinge-like action of the knitted mesh permits controlled resiliency of the finished gaskets. These can be die-formed to close dimensional tolerances, when required. There is practically no limit to the metal or alloy which can be used.

If the equipment you are manufacturing or designing requires a resilient conductive or shielding material, our engineers will welcome the opportunity of working with you. A letter, addressed to Mr. R. L. Hartwell, Executive Vice President and outlining your requirements, will receive immediate attention.

METAL TEXTILE CORPORATION
641 EAST FIRST AVE., ROSELLE, N. J.

The new S.S.WHITE 80X HIGH VOLTAGE RESISTOR

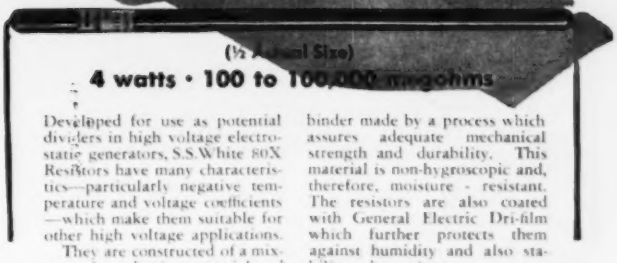

(½ Actual Size)
4 watts • 100 to 100,000 megohms

Developed for use as potential dividers in high voltage electrostatic generators, S.S.White 80X Resistors have many characteristics—particularly negative temperature and voltage coefficients—which make them suitable for other high voltage applications.

They are constructed of a mixture of conducting material and binder made by a process which assures adequate mechanical strength and durability. This material is non-hygroscopic and, therefore, moisture - resistant. The resistors are also coated with General Electric Dri-film which further protects them against humidity and also stabilizes the resistors.

WRITE FOR BULLETIN 4906

It gives complete information on S.S.White resistors. A free copy and price list will be sent on request.

THE S.S.White INDUSTRIAL DIVISION
DENTAL MFG. CO.
Dept. R 10 East 40th St.
NEW YORK 16, N. Y.

CRYSTAL GAZING ELECTRONICS STYLE

There's no room for "guess work" in the manufacture of crystals! That's why so many so often specify JK stabilized crystals when they want to be sure of utmost dependability.

Happily, this preference for the best costs no more. You, too, will be pleasantly surprised to find that The James Knights Company can furnish you outstanding quality at modest cost—in single units or production quantities.

JK STABILIZED H17

Frequency range 200 kc to 100 mc. The pin spacing is such that two units can be mounted in a loctal socket. A small extremely light weight hermetically sealed unit. Moisture and dust-proof. Designed especially for use where space is at a premium. The crystal is plated and wire mounted. Will stand maximum vibration. Pin diameter of the H17 is .050.

The H17L and the H17W are also available in the same frequency range except that the H17L has a pin diameter .093, and the H17W has wire leads.

The James Knights Company
SANDWICH, ILLINOIS

METAL on PLASTIC!

Electrostatically Shielded Housing



Instrument Panel

Special Commutator

that's *Metaplast*

the easy, proved way to combine conductor and non-conductor **IN ONE PIECE**

to simplify electronic designs and assemblies

to increase metals' corrosion resistance

to cut production costs

Metal-Plated Plastics combine the qualities of metals as conductors and plastics as insulators to serve a wide variety of unique purposes unfulfillable by a single material. In any application where intricate shapes of conductor and insulator, or thin layers of metal are needed, Metal-Plated Plastics have proved extremely useful. Typical examples are: radar piping, printed circuits, special commutators, slip rings, shielded housings, loop antennae, airplane antennae, Faraday shields, condensers, instrument panels, wave guides, piezo-electric crystals, contacts for electrical leads.

The Metaplast Process electroplates a smooth non-porous metal coating, in any thickness, on non-conductive surfaces. Any metal can be used to enhance the vibration and temperature resistance and dimensional stability of the plastic. Superior corrosion resistance is obtained by eliminating the bi-metallic couple resulting from plating one metal over a dissimilar metal.

Physical Properties of Metal-Plated Plastics are limited only by the base material, the metal deposited—and the imagination. It is possible to produce a copper plate having a tensile strength of 40,000 p.s.i. and an elongation of 25%. Plating can be varied to give a soft or hard deposit, and finished to any type surface from dull matte to high polish. Absorption of oils, solvents and moisture is eliminated by the continuous metal film preventing swelling and distortion of parts. Temperature resistance is extended 40-50 degrees.

Metaplast Silver Conductive Paints—especially compounded for all printing, spraying and painting processes—are available in a wide variety of formulas. They consist of a lacquer, varnish or other coating medium containing a silver powder in various percentages. They are excellent as high conductive coatings and as bases for electroplating. There's no worry about corrosion products as the paint films dry; all corrosion products of silver (sulfides, chlorides, etc.) are good conductors. These paints are sold by the troy ounce. Write today for Bulletin 51.

If Your Problem can be solved by any special application of the Metaplast Process or the Metaplast Silver Conductive Paints, outline it to us. We'll gladly tell you of its possibilities.

Send Us Your Blueprint or Plastic Sample—molded or machined—for our quotation. We plate to your specifications—in any quantity. Your inquiry involves no cost or obligation.

• • • • • • • • • • • • • •

Metaplast PROCESS, Inc.

9-17 37th Ave., Long Island City 1, N. Y.

crystal oscillator contained in the unit. This reading is displayed on a direct-reading, four-digit electronic counter using ten neon glow lamps for each digit. After each measurement and display period, the instrument automatically resets and recycles. The display time is adjustable over a period of from 0.5 to 4 sec, or can be set to hold the count indefinitely. In addition to the electronic counter registration of the measured frequency, the unit also includes a count-rate meter that can be used when an unknown frequency source is being adjusted.

Industrial Oscilloscope

WATERMAN PRODUCTS CO., INC., Philadelphia 25, Pa., has announced model S-14-A Hi-Gain industrial Pocketscope weighing 12¼ lb and featuring an amplifier sensitivity of 10 mv rms per in. Its utility in examining low-level aperiodic electrical impulses is evidenced by its linearized time base continuously variable, either repetitive or triggered, from 0.5 cps to 50 kc. Fidelity is within 2 db from 0 to 50 kc. Internal sine-wave calibration of trace amplitude is provided and attenuators and gain controls are non-frequency-discriminating.

Literature

Capacitor Bulletin. Cornell-Dubilier Electric Corp., South Plainfield, N. J. Bulletin NB-138 deals with the type IN series of automotive generator and radio noise capacitors. It describes their outstanding features, ratings and dimensions, and uses.

Parts & Equipment Catalog. Radio Shack Corp., 167 Washington St., Boston 8, Mass., has just published its 1951 catalog of electronic parts, complete equipment and kits. Major sections of the 172 pages include: test and service instruments, public-address and high-fidelity music systems, amateur radio equipment, tubes, transformers, connectors, wire and cable, capacitors, resistors, batteries and

TO INSURE PROMPT DELIVERIES...

"STANDARD" RECOMMENDS STANDARDS

You can depend on prompt deliveries of UNBRAKO Products when you use *standard sizes.*

For, despite shortages, stepped-up demand and other problems of the emergency, we've been able to keep full stocks of UNBRAKO *"standards"* on our dealers' shelves—ready for immediate delivery.

And that's not all . . . Every time you use a *standard* size UNBRAKO it represents a substantial saving over the cost of a "special."

Be sure you have our latest catalog of UNBRAKO *standard* products. Send for your copy of Bulletin 643-R today.

SOCKET **UNBRAKO** SCREWS

NEW! **HALLOWELL**

"UNI-TRUK" HAND TRUCKS

Available with one or two handles . . . send for Form 757-1.

"Try one and you will buy more!"

Patent Applied for

MODEL 720

STANDARD PRESSED STEEL CO.

JENKINTOWN 10, PA.

DUMONT RADIO NOISE SUPPRESSORS



RU-7 . . .
.02-.002-.002 MFD
110-220 V. A.C.-D.C.

RU-8 . . .
.07-.07-.07 MFD
110-220 V. A.C.-D.C.

Dumont engineers have spared no effort or skill to create a noise suppressor, for blanking out radio interference caused by such commonly used electrical appliances, as: fluorescent lights, refrigerators, motors, oil burners, fans, adding or x-ray machines, and the like. Interference spread by direct radiation or carried over 110-V supply circuits by carrier-current action can create disturbances of objectionable proportions for great distances. Dumont noise suppressors supply a low impedance path to ground capable of by-passing a considerable portion of radio frequency energy.

Write for Samples and Literature today.

DUMONT ELECTRIC CORP.
MFR'S OF CAPACITORS FOR EVERY REQUIREMENT
308 DYCKMAN ST. NEW YORK, N. Y.

E-I HERMETIC SEALING COMPONENTS

Announcing: **AN IMPORTANT ADDITION TO THE E-I FAMILY OF SEALED LEADS—**



NEW R and RR SERIES TERMINALS

A completely new line of double barrel terminals that provide added protection against flashover without any appreciable increase in terminal size. The double barrel results in a longer leakage path on both ends of the terminal while the upper barrel increases the mechanical strength of the terminal and facilitates soldering. For information call or write today.

Write for These Descriptive Bulletins:

849 — Hermetically Sealed Terminals
850 — Hermetically Sealed Headers
851 — Gasket Type Bushings

E-I INC. ELECTRICAL INDUSTRIES
INCORPORATED
44 SUMMER AVENUE • NEWARK 4, N. J.

Completes 300 TV sets — meets daily quota (at a cost of $4.70)

Delicate coils were needed by Midwest manufacturer to complete 300 TV sets . . . and Massachusetts supplier was 920 miles distant! Air Express assured delivery by 8 o'clock next morning, so manufacturer ordered 500 men to report for work. Shipment arrived 7:20 A.M.—production rolled! Shipping cost for 17-lb. carton only $4.70! Manufacturer uses Air Express regularly to keep business in high gear.

$4.70—and special pick-up and delivery included! Low Air Express rates cover door-to-door service. More convenient—easy to use. Just phone for pick-up! (Many low commodity rates in effect. Investigate.)

Air Express goes on all flights of Scheduled Airlines. Shipments keep moving around the clock—speeds up to 5 miles a minute. *Experienced* handling. Phone Air Express Division, Railway Express Agency, for *fast action*.

Air Express gives you all these advantages:

World's fastest transportation method.
Special door-to-door service at no extra cost.
One-carrier responsibility all the way.
1150 cities served direct by air; air-rail to 22,000 off-airline points.
Experienced Air Express has handled over 25 million shipments.

Rates include pick-up and delivery door to door in all principal towns and cities

A service of
Railway Express Agency and the
SCHEDULED AIRLINES of the U.S.

books. It is distributed free upon written request.

Magnetic Power Amplifiers. Magnetics, Inc., 135 Bloomfield Ave., Bloomfield, N. J. Bulletin No. 1000-1-H49 is an 8-page folder containing much informative data on the 400-cycle series magnetic power amplifiers. Included are a description, functional operation, advantages, applications, electrical data, response charts and typical schematic circuits.

Alloy Data Sheet. The Riverside Metal Co., Riverside, N. J., announces a new data sheet that correlates ASTM, Federal, Army and Navy specifications with 40 different alloys of phosphor bronze, nickel silver, beryllium copper and cupro nickel. In addition to correlating the five specification systems, the new data sheet gives general characteristics and typical uses of the above-mentioned alloys.

Radiation Laboratory Equipment. General Electric Co., Schenectady 5, N. Y. A new catalog contains condensed facts, pictures, prices and ordering information for over thirty special-purpose equipments for radiation laboratories. Items such as radiation detectors, particle accelerators, power supplies and general instruments are listed.

Capacitors. Astron Corp., 255 Grant Ave., East Newark, N. J. Dry electrolytics, molded paper tubulars, oil paper capacitors and the new self-healing subminiature metallized paper capacitor are illustrated and fully covered in catalog AC-2. Also treated is a helpful listing of standard r-f filters for aircraft and heavy-duty applications.

Variable Transformer. The Superior Electric Co., Hannon Ave., Bristol, Conn., has available a folder describing the newly redesigned Powerstat variable transformer types 116 and 216. Discussed are the new brush assembly, the new fusing arrangement, the new cast aluminum terminal box, the new coil and core design and polarity identification. A rating chart together with circuit drawings of individual types permit easy

WIND more COILS faster

WITH YOUR PRESENT COIL-WINDING MACHINE!

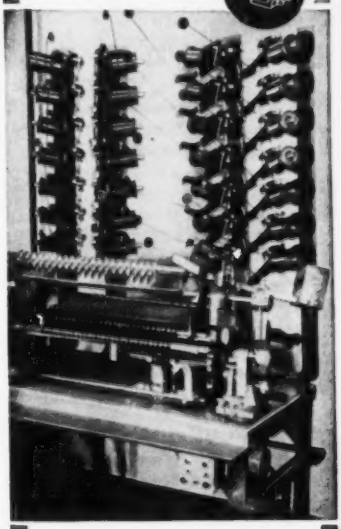

— use

PAMARCO

Wire DeReeling Tensions for PERFECT COILS

Installation of these inexpensive PAMARCO tensions lowers winding costs because each machine will accommodate more coils at *higher* winding speeds. In addition to increased production, PAMARCO tensions raise production quality. Free-running action practically eliminates wire breakage and shorted turns. Simple thumb screw setting quickly adjusts for any wire gauge. No tools or special skill are needed for operation. For complete data call or write.

PAPER MACHINERY & RESEARCH, INC.

1014 OAK STREET
ROSELLE, NEW JERSEY

LEKTROMESH

THE UNIQUE SOLID-METAL SCREEN

Distinguished for its

STABILITY in Use
UNIFORMITY of Hole Size
WORKABILITY in Manufacturing Processes
DIVERSITY of Applications to Research and Production

Electro-deposited in pure copper, pure nickel, or nickel-on-copper—in regular commercial production with counts from 25 to 400 per inch—in lengths up to 100 feet and widths up to 36 inches—with tolerances on hole size and thickness suitable for the most critical uses—LEKTROMESH is ideal for precise filtration, for fabricated products such as fuel filters and electronic shields. For full details let us send our Bulletin on LEKTROMESH. Address Department 17.

THE C. O. JELLIFF MANUFACTURING CORPORATION SOUTHPORT, CONN.

time saving··· cost saving!

dependable instruments

Heiland DENVER

Type A-708 24-channel

AUTOMATIC OSCILLOGRAPH *Recorder*

Developed for simplicity and ease of operation, the HEILAND Automatic Oscillograph Recorder saves time . . . reduces costs. Flexibility of operation permits the recording of strain, vibration, pressure, acceleration and temperatures.

Write for complete detailed information

HEILAND RESEARCH CORPORATION
137 East Fifth Avenue — Denver, Colorado

SPECIAL FEATURES

- Easy loading
- Four quick-change paper speeds
- Simultaneous viewing, recording, scanning
- Trace identification
- Zero mirror
- Adjustable automatic record length
- Synchronizing reference trace
- Lamp burn-out indicators
- Size: 9⅛" (H) x 13¼" (L) x 19⅛" (D)
- Weight: 59 lbs.

TERMINAL USED AS A NOSE!

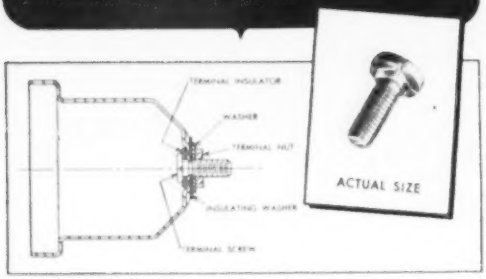

KING-SEELEY CORPORATION designed this Progressive-made terminal to permit the housing of its oil pressure unit to "breathe" — a feature that insures the presence of atmospheric conditions inside the housing and, consequently, accurate pressure registration.

Progressive was called in to make the terminal for two reasons. We have the engineering and production skills to make the part, in all its tricky detail, according to specification. And, secondly, we do a precise job at a cost that makes it worthwhile to do business with us.

We specialize in special fasteners. Use this specialization — you gain all ways.

WRITE FOR OUR CATALOG
IT MAY SAVE YOU MONEY

Other typical **PROGRESSIVE** *"Specials"*

QUALITY PROMCO BRAND

THE PROGRESSIVE MANUFACTURING COMPANY

50 NORWOOD ST., TORRINGTON, CONN.

SALES OFFICES: SAN FRANCISCO, LOS ANGELES, PORTLAND, DETROIT, PHILADELPHIA, CLEVELAND, SEATTLE, BOSTON, SYRACUSE, ST. LOUIS, CHICAGO

selection of the type best suited to a particular requirement. Mounting and outline dimensions are also shown.

Direct-Coupled Amplifier. Electro-Mechanical Research, Inc., Ridgefield, Conn. has issued a single-sheet bulletin giving a general description, quantitative data on performance and applications of the model 36B amplifier. The unit under discussion is a versatile broad-band instrument designed for operation in the frequency range from d-c to 1,000,000 cycles. A precision attenuator allows the maximum amplification of 10,000 to be reduced in 10-db steps over a range of 60 db.

Loudspeaker System. Jensen Mfg. Co., 6601 S. Laramie Ave., Chicago 38, Ill. Data sheet 160 deals with the model G-610 Triaxial loudspeaker system. Included are the system's objectives, results, performance, design features, applications, specifications and prices.

Speaker Catalog. Cleveland Electronics, Inc., 6611 Euclid Ave., Cleveland 3, Ohio, has announced catalog 127 M dealing with radio and tv replacement speakers, listing the complete line in permanent-magnet types and electrodynamic models. Also featured are the new weatherproof speakers and tv lightning arresters.

D-C Indicating Amplifier. Leeds & Northrup Co., 4908 Stenton Ave., Philadelphia 44, Pa. A recent 8-page folder describes and illustrates the various applications of a new stabilized d-c indicating amplifier. Two pages of specifications are given.

Photoelectric Equipment. De-Tec-Tronic Laboratories, Inc., 1227 N. Clark St., Chicago 10, Ill., is now offering a new 8-page catalog describing in detail a complete line of the latest in photoelectric equipment. It features 33 items of equipment and accessories for industrial applications, production control, counting, boiler and ventilating smoke detectors, burglar and warning devices. The catalog also describes an engineering serv-

IF IT'S

here...

IT'S **news...**

IT'S WORTH STOPPING TO SEE!

Maybe Industry doesn't maintain show windows on Fifth Avenue or State Street or Wilshire Boulevard like America's great department stores. But your industry has a mighty effective show window... and *this* is it... this magazine. In these advertising pages alert manufacturers show their wares. Here you will find up-to-the-minute news about products and services designed to help you do your job better, quicker, and cheaper. To be well-informed about the latest developments in *your* business, *your* industry... and to stay well-informed... *read all the ads too.*

McGRAW-HILL PUBLICATIONS



USES

- Ultrasonic Vibration Measurements
- Harmonic Analysis
- Cross Modulation Studies
- Noise Investigations
- Determining Transmission Characteristics of Lines and Filters
- Monitoring Communications Carrier Systems
- Checking Interference, Spurious Modulation, Parasitics, Effects of load changes, shock, humidity, component variations, etc. upon frequency stability
- Telemetering

SPECIFICATIONS

Frequency Range: 2 KC—300KC, stabilized linear scale

Scanning Width: Continuously variable from 200KC to zero

Four Input Voltage Ranges: 0.05V. to 50V. Full scale readings from 1 millivolt to 50 volts

Amplitude Scale: Linear and two decade log

Amplitude Accuracy: Within 1db. Residual harmonics suppressed by at least 50db.

Resolution: Continuously variable. 2KC at maximum scanning width, 500c.p.s. for scanning width below 8KC.

WRITE NOW For Complete Information, Price and Delivery

Available Now!

Easy, Fast Ultrasonic Spectrum Analysis WITH MODEL SB-7 PANORAMIC ULTRASONIC ANALYZER

An invaluable new direct reading instrument for simplifying ultrasonic investigations, the SB-7 provides continuous high speed panoramic displays of the frequency, amplitude and characteristics of signals between 2KC and 300KC. The SB-7 allows simultaneous observation of many signals within a band up to 200KC wide. Special control features enable selection and highly detailed examination of narrower bands which may contain signals separated by less than 500c.p.s. The instrument is unique in that it provides rapid indications of random changes in energy distribution.

PANORAMIC RADIO PRODUCTS

COMPOUNDS

Scientifically compounded for specific applications from waxes, resins, asphalts, pitches, oils, and minerals. Available in wide range of melting points and hardnesses. Special potting compounds are heat conducting and crack resistant at extremely low temperatures. Recommendations, specific data, and samples will be furnished on request.

for

IMPREGNATING
radio coils
transformer coils
ignition coils
wire coverings
paper tubes and forms
porous ceramics

SEALING
condensers
batteries
switch base terminals
socket terminals
light fixtures

DIPPING
Coils
Transformers
Condensers

POTTING
Radio Transformers
Light Units
Loading Coils
Condensers

BIWAX CORPORATION

3445 HOWARD STREET
SKOKIE, ILLINOIS

KLIPZON* CLIPS-ON

IT'S A TREAT to
TEST with KLIPZON PRODS
Here is NEW convenience in testing
BOTH HANDS FREE
for adjustments and soldering.

Built-in self holding jaws slip onto wires, legs and terminals easily. Grip test points until pulled off. Slender and streamlined for easy contact with inaccessible wires and terminals.

Klipzon V. H. F. Crystal Probes bring added versatility to your vacuum tube voltmeter and volt ohm milliammeter.

Use KLIPZON MINI-PROD CONNECTORS for quick, easy to make TEST HOOKUPS. Order a box of 20 Today! ... for AMAZING NEW TEST CONVENIENCE

At Your Local Parts Distributors. If not in stock write us direct for free KLIPZON folder C

*T.M.

UNITED TECHNICAL LABORATORIES MORRISTOWN, New Jersey

If . . .

. . if you are looking for better coils . .

. . if the price you are now paying seems out of line . .

. . if you have coil problems which seem difficult of solution . .

Remember This

The integrity of your supplier is your greatest assurance of dependability. Coto-Coil has devoted 33 years exclusively to coil winding, serving many concerns whose names are familiar to all.

BOBBINS
ACETATE INTERLEAVE
(Coalesced)
PAPER INTERLEAVE
COTTON INTERWEAVE
TAPED FORM WOUND
UNIVERSAL SINGLE OR
MULTI-PIE CROSS WOUND

COTO-COIL CO. INC
COIL SPECIALISTS SINCE 1917
65 PAVILION AVE.
PROVIDENCE 5, R.I.

ice for photoelectric equipment requiring special design.

Magnet Wire. General Electric Co., Bridgeport 2, Conn. Complete information on Formex and Deltabeston magnet wires is now available in a new 32-page booklet. It combines the listing of both film-type and asbestos and glass-insulated magnet wires, and fully covers the development, properties, applications, advantages and available sizes of these wires. Test data, graphs, illustrations and pertinent specification tables are included. A section is devoted to installation details such as methods of stripping, soldering, and welding, as well as a complete discussion on varnish treatment.

Beryllium Copper Springs. Instrument Specialties Co., Inc., Little Falls, N. J., has published catalog No. 6 showing chief advantages and typical applications for its many types of microprocessed beryllium copper springs. The informative and well-illustrated publication also contains a price list.

Miniature Transformers. New York Transformer Co., Inc., Alpha, N. J. Bulletin B-300 covers a line of Hornet miniature transformers. A table of standard dimensions, specifications, materials and construction and distinctive features are included.

Shock and Vibration Mounts. The Barry Corp., 179 Sidney St., Cambridge, Mass. Catalog 504 lists and describes in 12 pages a line of shock and vibration mounts for protection of industrial, marine and mobile equipment, ranging from heavy machinery to sensitive instruments. Correlated photographs and dimension drawings show mounting methods. Isolation characteristics, applications and construction notes accompany the listing of each type.

R-F Components. Selectar Industries, Inc., 401 E. 138th St., New York 54, N. Y., presents in a recent 4-page folder a condensed listing of cable connectors, adapters, transmission lines, couplings and radio-frequency components, as a ready reference. Inquiries are invited on

A Convenient, Low Cost, Portable
ELECTRIC Baking and Drying OVEN

Just What You Need for Touch-Up, Complete Refinishing, De-Hydrating, Baking Industrial Finishes

Here Are a Few of Its Features

- Plugs into any 110-V AC convenient outlet; no special wiring required.
- Fan driven forced circulation moves large quantities of air through oven, assuring uniform temperature and taking off moisture.
- Costs less than 5 cents per hour to operate; uses approximately 1 KW of electricity.
- Sensitive thermometer—which can be read from outside—is available for accurate temperature control; heats up quickly.
- Strong, sturdy construction.
- Two models, with maximum temperatures of 225° and 325° — higher temperatures special order.
- Proved on thousands of jobs.

$69.50 And Up, FOB Chicago

Write for Full Details

GRIEVE-HENDRY COMPANY

1101 N. Paulina Street Chicago 22, Ill.

TI 401
Signal Generator



INTERMODULATION TESTS MADE EASY!

An ideal tool for the design, maintenance and testing of audio devices, Altec's Intermodulation Analyzer offers distinct advantages over single-frequency "harmonic" methods of distortion measurement. Distortion products resulting from the interaction of **double** test frequencies are measured and read **directly** for any given power level. Analyzer includes VTVM, making residual noise and signal-to-noise ratio determinations possible without extra equipment. Instrument is a reliable performance index for FM and AM transmitters and receivers, all audio amplifier, disc, tape and film recording equipment.



TI 402—Intermodulation Analyzer

1161 N. VINE ST., HOLLYWOOD 38, CALIF.
161 SIXTH AVE., NEW YORK 13, NEW YORK

ALTEC
LANSING CORPORATION

ELECTRONICALLY REGULATED
LABORATORY POWER SUPPLIES

- STABLE
- DEPENDABLE
- MODERATELY PRICED

MODEL 28 STANDARD RACK MOUNTING
PANEL SIZE 5¼" x 19" WEIGHT 16 LBS.

- **INPUT:** 105 to 125 VAC, 50-60 cy
- **OUTPUT #1:** 200 to 325 Volts DC at 100 ma regulated
- **OUTPUT #2:** 6.3 Volts AC CT at 3A unregulated
- **RIPPLE OUTPUT:** Less than 10 millivolts rms

For complete information write for Bulletin E-11

LAMBDA ELECTRONIC CORPORATION
CORONA NEW YORK

ALLISON RADAR
FOR
MULTI-ENGINED AIRCRAFT
Military • Airline • Executive
MODELS E ES ESB
58-65 LBS. OVERALL WEIGHT

1. Long range. 80-150 miles.
2. Exclusive scanning method.
3. Compact. Sturdy.
4. Easy to operate. Pilot control.
5. Simplicity of maintenance.
6. Gyro-stabilized.
7. JAN components.
8. RACON beacons.

ALLISON RADAR CORPORATION
11 West 42nd St., New York 18
PEnn 6-5811-12

Lavite STEATITE CERAMIC

Design engineers and manufacturers in the radio, electrical and electronic fields are finding in LAVITE the precise qualities called for in their specifications . . . high compressive and dielectric strength, low moisture absorption and resistance to rot, fumes, acids, and high heat. The exceedingly low loss-factor of LAVITE plus its excellent workability makes it ideal for all high frequency applications.

Complete details on request

D. M. STEWARD MFG. COMPANY
Main Office & Works: Chattanooga, Tenn.
Needham, Mass. • Chicago • Los Angeles
New York • Philadelphia

SINTERED PERMANENT MAGNETS

ALNICO • HYCOMAX
ALCOMAX

Actual size of magnets

Photograph by courtesy of Decca Ltd.

The DECCA fit pick up uses Murex sintered permanent magnets. Where small complex shapes with high magnetic efficiency and stability are required, sintered permanent magnets are essential.

MUREX LIMITED *(Powder Metallurgy Division), Rainham, Essex, England*
London Sales Office: CENTRAL HOUSE, UPPER WOBURN PLACE, W.C. 1

The NEW *Berkeley* MODEL 1600

COUNTING RATE COMPUTER



gives you these important advantages:

1. Virtually instantaneous rate of response
2. Permanent printed record of counting rate
3. Operates from either binary or decade scaler

BRIEF SPECIFICATIONS

Designed specifically for tracer applications requiring faithful response to rapid changes in counting rate, the Model 1600 will operate from any scaler that can be made to provide successive output pulses after accumulation of predetermined count. Computer then counts elapsed time between successive output pulses into average counting rate. Counting rate can be read directly on visible meter of computer.

Choice of three recording rate ranges, in combination with proper scaling factors, permits selection of conditions for optimum statistical accuracy.

When designated as Model 1600A the unit includes standard recorder which provides permanent trace of counting rate.

FOR COMPLETE SPECIFICATIONS AND OPERATING DATA PLEASE WRITE FOR BULLETINS 1600E

Berkeley Scientific Company

P. O. BOX 1826 • RICHMOND, CALIFORNIA

products to government or individual specifications.

Miniature Speed Changers. Metron Instrument Co., 432 Lincoln St., Denver 9, Col. Bulletin No. 100 covers a line of miniature speed changers designed to solve fixed-ratio gearing problems in instruments, servomechanisms, controls, regulators and all low-power devices. General description, ordering information and data on other miniature components are included.

Microphotometer. American Instrument Co., Inc., Silver Spring, Md. Bulletin 2182 gives detailed information on the new light-scattering microphotometer, which measures 20 micromicrolumens of scattered light and has a sensitivity approximately 100 times greater than similar instruments. The instrument described is portable and completely a-c operated.

Microphone Systems. Stephens Mfg. Corp., 8538 Warner Drive, Culver City, Calif. Bulletin M-1 describes and illustrates a group of three microphone systems for swivel, stand and lapel applications. General characteristics, accessories and prices are shown. The microphones described eliminate conventional preamplifiers.

Transformer Catalog. Acme Electric Corp., Cuba, N. Y., has issued the revised catalog SD179 covering step-down transformers and voltage and frequency compensating transformers. In describing the voltage and frequency changing type transformers the catalog points out the advantages and economy of using this type of transformer in connection with standard 60-cycle equipment in areas where only a 50-cycle electrical frequency is supplied.

Glass-Sealed Connectors. Cannon Electric Development Co., Division Cannon Mfg. Corp., 3209 Humboldt St., Los Angeles 31, Calif. Bulletin GS-2 gives photographs, drawings and tabular data on a line of connectors made with A-type layouts in pin contact arrangements. The shells and contacts are steel. Contacts are set in glass, which is fused to both contact and shell. The GS-



For Toroidal Coils

To Your Specifications and at LOW COST*

write

UNIVERSAL MFG. CO., INC.
404 Hillside Avenue
Hillside, New Jersey

* This is possible due to our own specially designed winding equipment.

HIGH VOLTAGE POWER *Supplies*

Up to 250,000 volts
A.C. or RECTIFIED and FILTERED

SPECIAL INDUSTRIAL X RAY EQUIPMENT
FOR INSPECTION · GAGING · ANALYSIS . . .

We will Design, Engineer and Manufacture to your requirements.

BRACKE-SIEB X RAY COMPANY INC.
293 B THIRD AVENUE NEW YORK 10, N. Y.

MOVING?

If you are moving (or have moved), tell us about it, won't you? Your monthly copies of ELECTRONICS will not follow you unless we have your new address immediately. Make sure you don't miss a single important issue . . . and help us make the correction as speedily as possible by giving us your old address, too

ELECTRONICS
CIRCULATION DEPT.
330 W. 42nd St. New York 18, N. Y.

Patent Pending



new!

LOW COST DC SOURCE
ELECTRO "BJ" JUNIOR
SUPPLIES 1 to 12.5 AMPS.
6 VOLTS CONTINUOUS DUTY

3 to 9 Volts at Other Ratings

Demonstrate and Test from AC Lines . . .

Autos Radios • Relays • Telephone Circuits • Instruments • Other Low Voltage Devices

New Electro Model "BJ" Junior filtered power supply utilizes the same exclusive application of selenium rectifiers being used in the famous Model "B". This application, using conduction cooling, doubles the rectifier power rating, dissipates over 3 times the heat and provides lower cost per ampere output over other types. Provides ample power, with a peak instantaneous current rating of 25 amperes (from standard 50/60 cycle 115 volt source.) Heavy duty components withstand high over-loads. AC ripple less than 0.4 volts at 6 volts DC 8 amperes.

Net Price Only $32.40

UNMATCHED PRICE • PERFORMANCE • QUALITY

SEND FOR FACTS TODAY!

Electro Products Laboratories
4513-BJ Ravenswood Ave.
Chicago 40, Ill.

Send me new detailed literature on the "BJ" and complete line.

Name .....
Address .....
City ..... *State* .....

Electro

In Canada — Atlas Radio Corp. Ltd., Toronto

New radiation instruments in the modern tempo

The New Roentgen Rate Meter

The new Roentgen Ratemeter has been designed to indicate rate of beam intensity in roentgens per minute. Two probe selections are offered, each to cover four ranges of intensity, one 3-10-30-100, the other 30-100-300-1000 r per minute and both may be used interchangeably with the same meter. Calibrated in the international r, the instrument provides a means to make accurate and quick determinations of beam intensity for many laboratory applications.

The New Model 389 *Thyac* Survey Meter

A stable and versatile beta gamma survey meter incorporating new features and advantages in a portable instrument. The design provides compact, light weight, waterproof construction which meets severe military ruggedness and corrosion resistant requirements. It adapts itself for sensitive exacting laboratory measurements as well as for field measurements.

100 and 200 r hi-intensity chambers used with Model 392 charger

The Model 506 pocket ionization chamber is designed to meet the need for a compact dependable chamber for measurement of radiation in the 100 r and 200 r ranges. These chambers offer accurate readings of high intensity at energy responses of 40 KV and above, reliable for high dosage and are tamper proof.

The Victoreen Instrument Co.

5806 HOUGH AVENUE • CLEVELAND 3, OHIO

types treated are adaptable to working temperatures up to 800 F and meet salt spray tests of 76 hours, and also ruggedness and thermal shock tests.

Small Parts Welders. Federal Tool Engineering Inc., 532 Mulberry St., Newark 5, N. J. An eight-page folder composed of four bulletins deals with Tweezer-Weld small parts welders. It contains an illustrated description of bench model capacitor power units, hand and bench electrodes and automatic welding equipment.

Paper Tubulars. Cornell-Dubilier Electric Corp., South Plainfield, N. J. Bulletin RT349 contains technical information on Royal Tiger paper tubular capacitors utilizing Polykane, a solid synthetic thermosetting compound. The capacitors described are humidity proof, can be used at ambient temperatures from −35 to +100 C, and are available in all popular commercial capacity ratings at 100, 200, 400, 600 and 1,000 volts d-c.

Magnetic Recording. Armour Research Foundation of Illinois Institute of Technology, 35 W. 33rd St., Chicago 16, Ill., has available bulletin No. 64 comprising a bibliography on magnetic recording. It contains 371 references to previous articles on the subject as well as a reprint of what is believed to be the earliest reference to magnetic recording.

Sound Equipment. Rek-O-Kut Co., Inc., 38-01 Queens Blvd., Long Island City 1, N. Y. A recent 4-page catalog covers a line of high-fidelity recording and transcription equipment. A complete listing, description, specifications and prices are given.

Transformer Catalog. United Transformer Co., 150 Varick St., New York 13, N. Y., has just published a new 28-page illustrated catalog. Specified as Catalog 500, it contains a complete listing of a line of transformers, reactors and filters. It includes descriptions, applications, specifications, amplifier circuits, curves and useful charts.

Specify... GM

D'ARSONVAL PORTABLE

GALVANOMETERS

AND MOVEMENTS...



Series 570-500 Mirror-Type D-C Galvanometer

Ideal as a built-in component of other instruments—with the sensitivity and ruggedness that is especially desirable for Colorimetry, Densitometry, and various other measurements. Unit includes mirror movement, magnet and zero correction knob. Choice of 4 standard models.

Write us about your application and requirements

GM LABORATORIES · Inc

4314 N. Knox Ave. • Chicago 41, Ill.

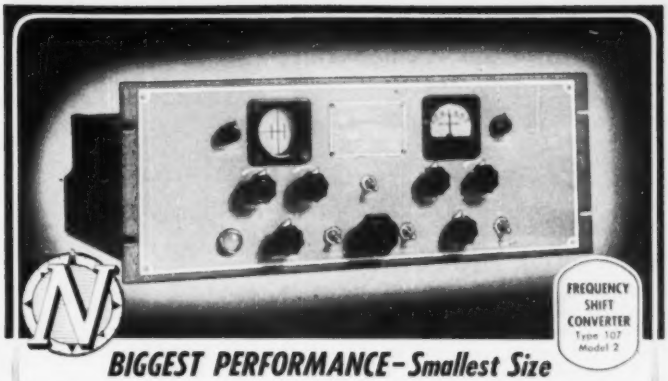

FREQUENCY SHIFT CONVERTER Type 107 Model 2

BIGGEST PERFORMANCE–Smallest Size

Four exclusives are yours with the Northern Radio FREQUENCY SHIFT CONVERTER —utmost simplicity of operation, precision tuning, highest quality performance, and smallest size in the industry.

For single and diversity FS receiving systems, this dual channel unit converts mark and space tones into DC pulses, and drives teleprinters and other recorders directly. Its unique 2" oscilloscope provides the industry's most meaningful tuning pattern for precise receiver adjustment—during initial setup and while keying. Its specially designed limiter and discriminator afford an exceptionally high degree of performance. Polar or neutral output is available. Keying speeds up to 600 w.p.m. It's only 19" wide x 7" high x 15" deep.

This unit may also be used as a make and break CW or ICW demodulator.

See the specifications on this outstanding model in the 1950 Electronics Buyers Guide. For complete data on the precision-built Northern Radio line, write today for your free latest Catalog E-3.

NORTHERN RADIO COMPANY, inc. • 143-145 West 22nd Street • New York 11, N. Y.

Pace-Setters in Quality Communication Equipment

Compare for *results!*

Compare for *price!*

and you'll choose the GREEN ENGRAVER

The Green Engraver offers great speed and convenience. Quickly cuts up to four lines of letters from 3/64" to 1" on curved or flat surfaces whether made of metal, plastics or wood . . . operates by merely tracing master copy—*anyone* can do an expert job. Special attachments and engineering service available for production work. Just the thing for radio, electronic apparatus and instrument manufacturers.

For *quality* engraving on

• Panels • Name Plates • Scales

• Dials • Lenses • Molds • Instruments

. . . also does routing, profiling and three dimensional modeling.

GREEN INSTRUMENT CO.
363 Putnam Ave.
Cambridge, Mass.

ACME

500 CYCLE LOW PASS FILTER

Acme solved one major manufacturer's problem by designing and producing this miniature filter with extremely low insertion loss within the pass band and 60 DB attenuation.

This is an example of what Acme is doing. Your problems will receive prompt attention. All wave filters and other products are built in careful conformance to military specifications. Your inquiry is invited.

Acme ELECTRONICS

Division of Acme Metal Die, Inc.
212 E. 17th St., Los Angeles 15, PRospect 7457

Wave Filters • Delay Lines • Magnetic Amplifiers • Special Transformers & Chokes • Toroidal, Universal & Solenoid Wound Inductors

SYNTRON

offers



SELENIUM RECTIFIERS

— made by a new process to uniform, high quality. In extra large cell sizes as well as small cells.

Write for brochure.

SYNTRON CO.

241 Lexington Homer City, Pa.

Try Remler for Service-Tested "Hard-to-Get" Components



SILASTIC RUBBER SHOCK MOUNTS

(1) Ideal for sub-panel mounting. Isolates tubes from shock and vibration. Mount retains compliance from *minus* 70° to *plus* 480° F. Invaluable for military and airborne equipment.

MINIATURE TUBE CLAMP

(2) Corrosion resistant. Holds miniatures in sockets under severe conditions of shock and vibration without restricting air circulation. Easy to insert and withdraw tubes. Three sizes.

Custom Components

Metal-plastic components designed and manufactured to order. Write for quotations specifying electrical and mechanical characteristics. Describe application. No obligation.

Remler Company Ltd.
2101 Bryant St. San Francisco 10, Calif.

Remler

Since 1918 PIONEERS IN ELECTRONICS AND PLASTICS

IN-RES-CO offers a complete line of standard **RESISTORS** that meet practically every requirement

. . . .

Prompt Quotations supplied on both standard and special types

—more compact, higher accuracy!

Economical in Cost

IN-RES-CO WL series resistors were designed to meet increasing demands for a compact resistor of high accuracy priced for general use. They meet the most critical requirements.—close tolerance, ability to withstand overload, long life. Write for catalog.

TYPES WL ⅝ and WLA ⅝



½ WATT INDUCTIVE

MAX. RES: 01 to 7,500 ohm (331 Alloy)
01 to 4,000 ohm (Nichrome)
01 to 1,250 ohm (Manganin)

BODY SIZE: ⅝" lg. by 3/16" diam.

TOLERANCE: STANDARD 1%

TYPES WL and WLA



1 WATT INDUCTIVE

MAX. RES: 01 to 15,000 ohm (331 Alloy)
01 to 8,000 ohm (Nichrome)
01 to 2,500 ohm (Manganin)

BODY SIZE: 1" lg. by 3/16" diam.

TOLERANCE: STANDARD 1%

Can be supplied non inductive with one-half indicated maximum resistance.

IN-RES-CO RESISTORS
APPLICATION DESIGNED

INSTRUMENT RESISTORS CO., 1036 COMMERCE AVE., UNION, N. J.

NEWS OF THE INDUSTRY

(continued from page 134)

ments on the proposed bracket standards.

Stereocasting Demonstrated

FIRST demonstration of stereophonic sound broadcasting using one transmitter was made recently by William S. Halstead of Multiplex Development Corp. in New York. At the transmitter, studio microphones were placed about ten feet apart. Musicians playing different instruments were stationed near each microphone and a third musician moved between the two positions. In the receiving studio, loudspeakers connected to their respective radio channels were placed 15 feet apart. One sound channel comprised the regular f-m broadcast facilities of station KEA2XKH and was heard by broadcast listeners. The other sound channel was multiplexed (see *Tubes At Work* in this issue) as a subcarrier and picked up by a special receiver. Even though the experimental facilities did not reproduce frequencies above 10 kc, the effect of presence and the apparent movement of the performers appeared to compensate for the lack of frequency range in the fidelity of the performance.

H-F Measurements Conference

THE SECOND high-frequency measurements conference sponsored jointly by the American Institute of Electrical Engineers, the Institute of Radio Engineers and the National Bureau of Standards will be held in Washington, D. C. on January 10 to 12, 1951. Conference headquarters will be at the Hotel Statler, with the technical session held in the auditorium of the Department of the Interior. The Conference program will include about 25 technical papers, an evening demonstration, a luncheon and conducted inspection tours.

Four sessions will be devoted to measurements in the following categories and are being organized by the individuals noted: frequency and time, by Harold Lyons of NBS, transmission and reception, by

FOR THE "GOLDEN EAR" CROWD

THE STRAIN-SENSITIVE PHONOGRAPH PICKUP

Here's why this truly faithful reproducer appeals to people gifted with the "Golden Ear" . . . why the STRAIN-SENSITIVE PICKUP developed by the PFANSTIEHL CHEMICAL COMPANY brings out the brilliance of great voices and orchestras . . . the latent music on your records that other pickups leave untouched.

- The STRAIN-SENSITIVE PICKUP is an amplitude transducer with a CONSTANT RESISTANCE of about 250,000 ohms.
- Signal output is at a practically CONSTANT IMPEDANCE level.
- Excellent transient response.
- NO DISTORTION, phase shift or evidence of intermodulation is audible.
- LINEAR RESPONSE free from peaks or resonances.

Cartridges are available for both standard and micro-groove, and can be had with Famous PFANSTIEHL M4-B Precious Metal Alloy or diamond tipped styli.

A special preamplifier is necessary to provide the correct D.C. voltage for the pickup element and to provide the first stages of signal gain. Four styles are ready, or, if you prefer, you can build your own from the circuit in the literature.

Ask your radio supply man, or write today for complete FREE INFORMATION.

PFANSTIEHL
CHEMICAL COMPANY
103 Lake View Avenue, Waukegan, Illinois

POWDERED IRON CORES

SERVICE
QUALITY
DEPENDABILITY

Special magnetic core manufacturing techniques assure iron cores of outstanding quality and dependability for exacting specifications.

Write for samples. State specification problems and quantity needed.

Chicago, Ill.
A. J. Ellis Co.
1607 Howard St.

MAGNETIC CORE CORP.
Manufacturers of Electronic Powder Metallurgy
142 SOUTH HIGHLAND AVENUE, OSSINING, NEW YORK
OSSINING 2-0222

A TIME-TESTED DEPENDABLE SOURCE FOR

HIGH-PRECISION FRACTIONAL H.P. INSTRUMENT-TYPE
MOTORS & GENERATORS
PRODUCED TO ORDER

GOVERNOR-CONTROLLED
SELF-SYNCHRONOUS
DRAG CUP
VELOCITY & ACCELERATION
DC & AC TACHOMETER
SHUNT
SERIES
COMPOUND
PERMANENT MAGNET
SPLIT-FIELD
SEPARATELY EXCITED
UNIVERSAL
INDUCTION
RELUCTANCE
HYSTERESIS
ONE, TWO & THREE PHASE
DC & AC SERVO
TOTALLY-ENCLOSED
AC DYNAMICALLY BRAKED
REELMOTORS
ONE, TWO, THREE & FIVE SPEED SYNCHRONOUS MOTORS

Experienced for years in meeting customers' exacting requirements for high-precision instruments designed by engineers of ability and ingenuity, and manufactured with extreme care and skill. Over 500 different basic types may be varied to meet your own unique requirements of use, either electrically or physically.

ELECTRIC INDICATOR CO
PARKER AVENUE
STAMFORD, CONNECTICUT

At Last!



PAPER TUBES for Coil Winding up to 7½" x 7½" wall thicknesses to ¼"

50,000 possible ARBOR sizes

IMMEDIATE DELIVERY on "STOCK" sizes of square and rectangular Dielectric Kraft tubes, from ⅜" x ⅜" to 1½" x 2⅜". Round tubes ⅛" ID to 1" ID.

Write today for prices on ANY dimension or quantity of tube you desire. Ask about our phenolic impregnated tubes.

ACCURATE PAPER TUBE CO.
852 N. Noble St. Chicago 22, Ill.

Little-thought-of facts about capacitors

The short time breakdown voltage of a well-made D.C. capacitor is not less than 5 to 6 times the actual working voltage at 20°—

E = 5 × e min
E = Breakdown voltage
e = Rated d.c. working voltage

INDUSTRIAL CAPACITORS are unvaryingly held to this formula.

Designed for maximum safety and the smallest possible volume, INDUSTRIAL CAPACITORS are the most widely used capacitor in industrial applications.

WRITE TODAY FOR DETAILED CATALOG

INDUSTRIAL CONDENSER CORP.

Watch this space for other capacitor facts that will help you.

Sales Offices in All Principal Cities
3243 N. California Ave.
Chicago 18, Illinois

PYROFERRIC

ACQUIRES NEW PLANT

(in MT. VERNON, N. Y.)

To Meet Increasing Demands For Powdered Iron Cores

With expanded production facilities, PYROFERRIC is now able to meet the increasing demands for iron cores and powdered metallurgy development.

PYROFERRIC engineers are specialists and pioneers in the technique of powder metallurgy development and iron core manufacture. Consult with them on your iron core or powder metallurgy requirements... no requirement too small or too large.

*New plant is at 14 North Bleeker Street, Mt. Vernon, N. Y.

Address all communications to

PYROFERRIC

621 EAST 216 ST., NEW YORK 67

The FISHER-PIERCE

PHOTOELECTRIC TOWER LIGHTING CONTROL



Turn-on 35 ft.-candles—off at 55 ft.-candles—independent of time of day or weather conditions.

Low first cost—negligible maintenance.

3000 watts contact capacity.

Over 20,000 in use for tower and street lighting.

Complete details available — ask for Bulletin 63305.

The FISHER-PIERCE COMPANY, Inc.

43 Crayton St., Boston 21, Mass.

MERCOID

MERCURY SWITCHES

BUILT TO ENDURE



Universally Known for Their Superior Quality and Workmanship

They are not affected by dust, dirt or corrosion and have many definite applications where open contacts are not suitable. Various types available. MERCOID is your guarantee of the best in mercury switches. Further information sent upon request.

Our engineering department will gladly assist you on any of your switch problems.

THE MERCOID CORPORATION

4201 West Belmont Avenue, Chicago 41, Illinois

IT PAYS TO GET THE BEST

... highest known

Recording Efficiency

for Instrumentation Applications

Ampex Magnetic Tape Recorders offer the only proved means of making electrically reproducible recordings up to 40,000 cps! Such critical recording permits detailed study of particular phenomena from tape loops or other automatic data reducing systems. Up to 14 channels of data recorded simultaneously on separate tracks where required. Special systems record down to 0 cycles with no phase shift or wave form distortion. Write for analysis of your specific problem.

Ampex Magnetic Tape Recorders are available in console, rack or portable types.

UNLIMITED USES INCLUDE:

- Recording Broadcasting
- Aerophysical Research
- Industrial Recording
- Multi-Channel Recording
- Laboratory Research
- Portable Half-Track Recording
- Telemetering

STANDARD OF THE GREAT RADIO SHOWS

AMPEX

MAGNETIC TAPE RECORDERS

AMPEX ELECTRIC CORP.
San Carlos, Calif.

BIRTCHER

STAINLESS STEEL . LOCKING TYPE

TUBE CLAMPS

Stainless Steel — Corrosion Proof

83 VARIATIONS

Where vibration is a problem, Birtcher Locking TUBE CLAMPS offer a foolproof, practical solution. Recommended for all types of tubes and similar plug-in components.

More than three million of these clamps in use.

FREE CATALOG

Send for samples of Birtcher stainless steel tube clamps and our standard catalog listing tube base types, recommended clamp designs, and price list.

THE BIRTCHER CORPORATION

5087 HUNTINGTON DR. LOS ANGELES 32

E. P. Felch of BTL, impedance, by R. A. Braden of RCA, and power and attenuation, by E. W. Houghton of BTL.

The conference is under the general direction of the Joint AIEE-IRE Committee on High Frequency Measurements, of which Ernst Weber of the Microwave Research Institute of the Polytechnic Institute of Brooklyn is chairman. Harold Lyons of the National Bureau of Standards is chairman of the local arrangements committee and Frank Gaffney of the Polytechnic Research and Development Co. is chairman of the technical program committee. Finances are being handled by Ivan Easton of General Radio Co. and publicity by E. P. Felch of the Bell Telephone Labs.

FCC Acts to Restore State Guard Radio Service

A PROPOSAL has been made by the FCC to amend its rules governing public safety radio services in order to reactivate a State Guard Radio Service. Such a service (which is distinctive from the National Guard) was operative during World War II for emergency purposes. Nearly 30 state guard authorizations were then outstanding, covering in each instance operation of from 40 to 200 or more low-power portable or mobile stations by state guard personnel only. This service was deactivated July 1, 1948.

Because of current developments, it is planned to recreate this service. Such stations would, primarily, handle emergency communications relating to public safety and the protection of life and property, and, secondarily, those essential for training and organization maintenance. They would share the 2,726-kc frequency with stations in the special emergency radio service. Comments were received on the proposal up to Oct. 16, 1950.

BUSINESS NEWS

METAL POWDER ASSOCIATION, New York City, N. Y., has established an Electronic Core Division to develop and promulgate standards for both

There is no such thing as a *Standard* TRANSICOIL Control Motor

YOU specify what **YOU** need. Transicoil will make it for you. Forget confusing design troubles brought about by trying to adapt standard units to your applications. Eliminate secondary operations often necessary for installation. Transicoil precision components are made the way you want them made and shipped ready for immediate use.

***FREE!* COMPLETE DATA ON CONTROL MOTORS**

This big chart, packed with valuable technical data, is ideal for applying Transicoil Control Motors to your products. Send for your copy today!

Other Transicoil Products:

PRECISION GEAR TRAINS, INDUCTION GENERATORS, SERVO AMPLIFIERS

TRANSICOIL CORPORATION

107 GRAND STREET NEW YORK 13, N.Y.

the manufacturers and users of iron-powder cores.

NATIONAL ELECTRONICS, INC., industrial tube manufacturers, have completed an 80-percent expansion of total floor space at their Geneva, Ill., plant to increase production of thyratrons, rectifiers and mercury pool tubes.

ACME ELECTRIC CO., Cuba, N. Y., has begun construction of a new 25,000-sq ft building at Allegany, N. Y., to improve and increase facilities for manufacturing and assembling of transformer components for military as well as peacetime applications.

Acme Electric's new Allegany, N. Y., plant

CORAL DESIGNS, division of Henry G. Dietz Co., formerly located in Forest Hills, N. Y., is now operating in its new expanded quarters at 12-16 Astoria Blvd., Long Island City 2, N. Y. Its facilities, besides being devoted to its standard line of controls, include all of the necessary equipment for small-scale production of specialized electronic equipment.

SYLVANIA ELECTRIC PRODUCTS INC., has built a 30,000-sq ft plant in Warren, Pa., to specialize in the production of plastic and plastic-metal components for radio and television.

THE PYRAMID ELECTRIC CO., Paterson, N. J., manufacturer of electrolytic capacitors, has purchased the former Solar plant, North Bergen, N. J., for $300,000.

PERSONNEL

WILLIAM A. WILDHACK, formerly chief of the missile instrumentation section of the National Bureau of Standards, has been named head of the office of basic instrumentation recently established at the Bureau. The new office will coordinate a pro-

it's FALSTROM for metal forming-

FORMED AND ASSEMBLED BENCH BOARD

SEE OUR CATALOG IN SWEET'S



1. CONTROL CENTERS
2. ENCLOSURES
3. PANELS
4. BOXES

FALSTROM service is fast, competent, complete. It includes forming, punching, welding and finishing. Piping, wiring and accessories can be built in when desired. Falstrom engineers will even procure and install your instruments to your specifications. All work performed by Falstrom is done by engineers and technicians thoroughly familiar with each phase of production. Mechanics skilled in working with steel, aluminum and stainless steels assure finest workmanship. Falstrom installations are in service throughout the electrical, chemical and petroleum industries – have been an accepted standard of excellence since 1870. For a practical, economical solution to your metal forming problems, go to Falstrom!

TO GET ALL THE FACTS, FILL OUT AND MAIL THE HANDY COUPON BELOW

FALSTROM COMPANY

93 FALSTROM COURT • PASSAIC, N. J.

Gentlemen:
Please send full information at once. I am interested in Nos.
NAME
TITLE
COMPANY
STREET
CITY ZONE STATE

DC - AC
CHOPPER

A model for every use.
10 — 500 cycles AC
Meets AN Specifications
also 60 cycles
Single pole and double pole
Make-before-break contacts
Contacts in air or in liquid

These Choppers convert low level DC into pulsating DC or AC so that servo mechanism error voltages and the output of thermocouples and strain gauges may be amplified by means of an AC rather than a DC amplifier.
They are hermetically sealed, precision vibrators having special features which contribute to long life and low noise level.



WRITE FOR THESE CATALOGS
#2328 10-500 cycles
#264A 60 cycles

STEVENS ARNOLD
INCORPORATED

22 ELKINS STREET
SOUTH BOSTON 27, MASS.

Specify **BREEZE** "Monobloc" Waterproof and Pressure Sealed **CONNECTORS**

The only APPROVED Monobloc System for Advanced Radar, Communications, and Electronic Equipment

Breeze "Monoblocs", with single piece plastic inserts offer outstanding advantages in assembly, wiring, mounting and service in the field.

- *Removable contact pins*
- *Single hole panel mounting*
- *Pressure sealed to 75 psi, or higher when required*

Breeze "Monobloc" Waterproof and Pressure Sealed Connectors available in aluminum, brass, steel . . . all sizes and capacities . . . fully tested and approved.

WRITE FOR DETAILS . . .
If you have a tough connector problem ask BREEZE for the answer.

BREEZE Corporations, Inc.
41K South Sixth St.
Newark 7, New Jersey



Precision **MINIATURE SLIPRING** *Assemblies*

and commutators for gyros, computors, resolvers, motors, selsyns

- Absolute minimum torque friction.
- Diameter ranges .050" — 24.0".
- Minimum 1000 V.A.C. hi-pot between circuits.
- Hard silver plated to plastic base and wire to form rigid assembly that withstands up to 12,000 r.p.m.
- Supplied to your specifications at competitive prices.

ELECTROTEC Corporation
SOUTH HACKENSACK NEW JERSEY

DANO coils stop Production Holdups!

For uninterrupted production, demand Dano trouble-free coils made up to your exact specifications. Avoid production holdups! Order now from Dano, makers of a wide variety of coils.

Also, Transformers Made To Order

- Form Wound
- Paper Section
- Acetate Bobbin
- Molded Coils
- Bakelite Bobbin
- Cotton Interweave
- Coils for High Temperature Applications

THE DANO ELECTRIC CO.
MAIN ST., WINSTED, CONN.

All-Metal... All-Weather **MOUNTS**

COMPLETE and BALANCED PROTECTION

(CUP TYPE MODEL #7002)

MET-L-FLEX

Unit mounts and mounting systems with MET-L-FLEX provide vibration isolation and true shock absorption through the widest range of operating conditions. All-metal • no organic materials • stable characteristics from −90° C. to +175° C. • wide load tolerance • built-in damping for stability and reduced amplification at resonance.

For electronic or delicate equipment mounting, write Dept. 515 MET-L-FLEX Data Sheets available.

ROBINSON AVIATION INC.
TETERBORO, NEW JERSEY
Vibration Control Engineers

Here's Why it Pays You... to Read the Advertising

The advertising is a rich source of valuable information. In this magazine it offers you ideas and products that may well apply advantageously to your business.

Every issue is a catalog of goods, materials, and services — quickly available to you — just for the reading.

Leaders in business and industry turn to the advertising because they've discovered it helps them run their businesses more profitably.

When you read all the ads in this magazine, the chances are good that you'll get a lead that will materially help you do a better job. For example, you may find a specific piece of equipment that will be a profitable time-saver. Or a tool that will increase worker efficiency. That's why it pays to read the advertising. It's good business.

HEADQUARTERS FOR BUSINESS INFORMATION

McGRAW-HILL publications

F-23

CONSTANT RESISTANCE HIGH POWER RATING

TERMALINE

COAXIAL LOAD RESISTORS

51.5 ohms DC to 4000 mc – 5 watts to 2500 watts

The constant resistance (Low VSWR) of the TERMALINE resistor make it the ideal dummy load and standard resistor at UHF and VHF. Design is such that normal reactance is put to work producing a pure resistance over an extremely wide frequency range. Acting as a bottomless pit for RF energy, thousands of TERMALINE units are in daily use with high frequency transmitters.

Size 3½" x ¾" dia.
Very handy in lab and production test. At signal generator levels and below 5 watts, this is the last word for low VSWR.

SIX MODELS AVAILABLE

Model	Cont. Power Rating	Input Connector
* 80-5F	5 watts	UG-21B U
* 80-5M	5 watts	UG-21B U
80A	20 watts	UG-21B U
81	50 watts	UG-21B U
81B	80 watts	UG-21B U
82	500 watts	Adaptor to fit UG-21B U supplied.
82C	2500 watts	

Other adaptors or cable assemblies for any standard coaxial line available.

All TERMALINE units, except Model 82C, are self-cooled and require no auxiliary power. Substantial quantity discounts.

LITERATURE UPON REQUEST

BIRD ELECTRONIC CORP.

Instrumentation for Coaxial Transmission

1800 East 38th Street • Cleveland 14, Ohio

West Coast Representative • NEELY ENTERPRISES • Hollywood 46, Calif.

SLOW SWEEPS HIGH SENSITIVITY



- **Band Pass—DC-2mc**
- **Sensitivity—5mv/cm maximum**
- **Sweeps—.3 sec/cm to 3 usec/cm**

Type 512 Oscilloscope

Accurate observation and measurement of slowly recurring phenomena is difficult, if not impossible, by conventional oscilloscopic techniques. The Tektronix Type 512 Cathode Ray Oscilloscope, combining as it does direct-coupled amplifiers, slow sweeps and high accuracy, is recognized by a constantly increasing number of researchers as being an indispensable laboratory tool. New and fruitful approaches to the problems encountered in research are permitted by these features. $950.00 f.o.b. Portland, Oregon.

Write today for detailed specification of Type 512 and other Tektronix instruments.

TEKTRONIX, INC.

712 S.E. Hawthorne Blvd. Portland 14, Ore.

gram of evaluation and improvement of instruments for measuring basic physical quantities which has been initiated in cooperation with the department of Defense.

DONALD C. MCDONALD was recently promoted from supervisor of instrumentation to chief engineer of the Cook Research Laboratories, a division of the Cook Electric Co., Chicago, Ill. He is a member of the Guidance and Control Working Group on the Panel on Countermeasures, Guided Missiles Committee of the Research and Development Board.

D. C. McDonald

H. R. Terhune

HAROLD R. TERHUNE, previously in charge of electrical components standardization for RCA Victor, has joined the Mycalex Tube Socket Corp. of New York, N. Y., and Clifton, N. J., as vice-president, and will head the standards department of both this company and its affiliate, Mycalex Corp. of America. For the past five years he has been chairman of the RTMA Transmitter Section Tube Socket Committee.

RALPH L. PALMER, electronics engineer with IBM since 1932, has been made laboratory manager of the engineering laboratory of International Business Machines Corp., Poughkeepsie, N. Y.

JOHN A. P. OHMAN, a former vice-president of Geovision, Inc., of New York, and chief engineer for the Rieber Research Laboratory of the same city, has been appointed a senior research engineer in the physics department of Southwest Research Institute.

DALE POLLACK, consulting engineer, has joined with Spectrum Engineers, Inc., Philadelphia, Pa. in forming the New London Instrument Co., New London, Conn., to

HEINTZ and KAUFMAN
Frequency Shift
EXCITER
(HK-A-4722)

FOR FAST, DEPENDABLE RADIO-TELETYPE RADIO-PHOTO OR FACSIMILE TRANSMISSION

This is the basic unit required for frequency shift transmission. It converts d.c. keying impulses into r.f. energy, with the output frequency shifted in accordance with the input keying. It also provides stable r.f. excitation to the transmitter, and is the frequency determining element in the transmission system. The type HK-A-4722 exciter is designed for stable operation over long periods of unattended service.

SPECIFICATIONS

- **FREQUENCY SHIFT:** Adjustable from 50 to 1000 c.p.s.
- **KEYING SPEED:** To 600 words per minute.
- **OUTPUT FREQUENCY RANGE:** Optional, 1.6-5 mc, or 2-6 mc.
- **OUTPUT POWER:** 3 watts into 50-75 ohms.
- **KEYING SIGNAL:** Optional, positive or negative to ground. Positive keying voltage, 50 volts. Negative, 10 volts.
- **OVERALL STABILITY:** Plus or minus 20 c.p.s. for ambient range from 0° C to 50° C, or with line voltage variation of plus or minus 10%, using an 850 cycle shift.

H & K leads in F-S equipment design

Heintz and Kaufman F-S equipment provides the utmost reliability in simplex and multiplex radio-printer operation.

Write for specifications on the new HK-4920 diversity receiver terminal.

Communication Equipment Division
THE ROBERT DOLLAR CO.
50 DRUMM STREET • SAN FRANCISCO, CALIF.
Export: The M. Simons & Son Co., 25 Warren St., New York City — Cable: SIMONTRICE

engage in research, development and manufacturing.

WILFRED ROTH, formerly head of the Servo Section of Raytheon Mfg. Co. and STANLEY R. RICH, formerly head of the Servo-Sonic Dept. at Raytheon have formed the Rich-Roth Laboratories.



W. Roth S. R. Rich

The new organization located at 673 Connecticut Blvd., East Hartford, Conn., specializes in servomechanisms, ultrasonics, magnetics, electronics, transducers and applied mathematics.

RAYMOND O. ANDERSON, assistant director of research, has been designated by Minneapolis-Honeywell Regulator Co. as its representative in an atomic energy study program for industry being sponsored by the AEC. He will undertake a year's research at the Knolls Atomic Power Laboratory, Schenectady, N.Y.

LARRY C. F. HORLE recently retired as chief engineer of the Radio-Television Manufacturers Association.

Larry C. F. Horle (left), retiring RTMA chief engineer, is presented with a scroll and a Philco tv combination by D. G. Fink, editor of ELECTRONICS. The tv receiver was a gift from the JETEC, to which L. C. F. Horle was a consultant

Making cold metal go exactly where it's wanted by cold heading frequently requires specialized skills. Take this steel acorn-head screw, for instance. Ordinary cold heading just can't displace such a large amount of metal in the head on such a small threaded section.

Scovill makes a specialty of "tough" cold heading jobs—has the engineers, toolmakers and operators to turn out parts like these to close tolerances, with better finish, at low cost. Send your sample or blueprint for further information.

"Guide to the Profitable Use of Cold Heading" —Bulletin No. 2 describes the advantages and limitations of this process for the designer. It's free for the asking.

Recessed Head Screws • Sems
Tapping Screws • Standard
Machine Screws • Special Cold
Headed Parts

SCOVILL

SCOVILL FASTENERS AND SPECIAL PARTS

Industrial Fastener Sales, Waterville Division
Scovill Manufacturing Co., Waterville 14, Conn.

Montclair, N. J. • Detroit • Wheaton, Ill.
Los Angeles • Cleveland • San Francisco

MICROPOT

PRECISION TEN-TURN POTENTIOMETER

1. You get permanent accuracy because the resistance wire is locked in place. It is precision positioned and moulded integrally with the housing.
2. You get permanently accurate settings, smooth action and low uniform torque provided by the stainless steel, precision ground, double thread lead screw guiding the moving contact.
3. You get precise positioning of the moving contact because of the two bearings supporting the rotor assembly.
4. You get good rigid terminals because they are moulded integrally with the housing.
5. Terminals soldered to ends of resistance element before moulding. Entire resistance circuit is an integral part of the housing.
6. You get accurate setting and resetting due to anti-backlash spring in contact guide.
7. You get a fine resolution because of the 43¼" length of resistance wire in the spiral element.
8. You get a resistance output directly proportional to shaft rotation within ±0.1% of the total resistance. Every potentiometer is automatically machine tested for linearity at 101 points.



LINEARITY ACCURACY ± 0.1%

Units for immediate shipment:
1,000 to 30,000 ohm range.
Special resistance values made to order.

WRITE TODAY FOR ENGINEERING INFORMATION

GIBBS DIVISION
THE GEORGE W. BORG CORPORATION
DELAVAN • WISCONSIN

NOW! Synchronous Recording

WITH YOUR PRESENT TAPE RECORDER

Here's good news! The new Fairchild Control Track Generator makes possible picture synchronous sound-track recording with any tape recorder with response good to 14KC. Here's how! This new Fairchild instrument superimposes a high frequency signal on magnetic tape simultaneously with the sound track. This signal becomes the tape speed control when played back on a Fairchild Pic-Sync Tape Recorder. No extra heads or modifications to presently owned tape recorders are required.



This compact unit comes in a small carrying case—for on-location work —and may be removed for rack mounting.

WRITE FOR FULL ENGINEERING DATA TODAY

Fairchild
RECORDING EQUIPMENT CORPORATION

154TH STREET AND 7TH AVENUE WHITESTONE, L. I., N. Y.

zlers for this department. A payment of $5.00 will be made for each acceptable entry (with solution). Answers to problems will be published in the issue succeeding each problem.

Last Month's Solution

Last month's problem was:

What is the power dissipated by the plate resistor of a class A audio amplifier when both a sinusoidal and d-c component of plate current are present?

Solution. Let the maximum value of the a-c component alone be e_1, and let the d-c component be e_2. The power dissipated over one cycle is given by

$$P = \frac{1}{2\pi R}\int_0^{2\pi} (e_1 \sin\theta + e_2)^2 \, d\theta$$

$$= \frac{e_1^2}{2R} + \frac{e_2^2}{R} + \frac{2e_1e_2}{\pi R} \qquad (1)$$

If the power dissipated due to the d-c component alone is P_2, then the ratio of the total power to P_2 is

$$\frac{P}{P_2} = 1 + \frac{X^2}{2} + \frac{2X}{\pi} \qquad (2)$$

where X is the ratio of peak value of the a-c component e_1 to the d-c component e_2. It is evident that a convenient nomograph of Eq. 2 could be plotted. However, the maximum value that X may have for class A conditions is unity so that a nomograph is hardly necessary. For X equal to unity in Eq. 2, one obtains a value of total power that is 2.136 times the d-c power.

One must further assume that the amplifier might be required to pass square waves indefinitely, for which case the power dissipated would approach the ratio of the square of the supply voltage to the resistance used.

Television Coverage

DEAR SIRS:

THE FCC is currently engaged in hearings to allocate television stations throughout the country. They have announced that first priority is being given to the establishment of at least one television service to the entire area of the United States. Notice that this priority does not

PRECISION MINIATURE 6" DRILL PRESS WITH— SENSITIVE FEEL!

MODEL 204-B meets the increasing post-war demand for small drilling to ever higher accuracy standards. Spindle turns smoothly on Selected Bearings, run out less than .0004", table square to spindle within .0006" at 2½" radius. Permanent accuracy; castings annealed and ground. Write Bulletin E-1.

micro-mechanics

Phillips & Hiss Co., Inc.

6666 Lexington Avenue
Hollywood 38, California

MICRODIAL

TEN TURN-COUNTING DIAL

Microdial is composed of two concentrically mounted dials . . . one for counting increments of each turn and the other for counting turns. The incremental dial has 100 equal divisions and is attached rigidly to the shaft so there is no backlash. Thus the contact position is indicated to an indexed accuracy of 1 part in 1000. Rotation is continuous in either direction. There are no stops on the Microdial assembly.

COMPACT. . . Microdial has same O.D. as Micropot . . . requires no more panel space.

CLEAR READING . . . Forced fast-reading tests showed only 1/20th as many errors with Microdial open window as with next most legible dial. Turn counter distinguishes between 0 and 10 turn readings, and accelerates to avoid confusion on readings near integral turns. Precise readings are made from larger dial with maximum separation of graduations and wide angle visibility.

CONVENIENT. . . delivered completely assembled with dials synchronized. Easily mounted in a few seconds. All dials may be locked.



Microdial . . . turn-counting dial, primarily designed for use on Micropot ten turn linear potentiometers . . . use it on any multiturn device having ten turns or less.

GISSS DIVISION
THE GEORGE W. BORG CORPORATION
DELAVAN • WISCONSIN

electronics

PUBLISHES

13

ISSUES YEARLY

including the

MID-JUNE

BUYERS' GUIDE

Quality controlled

SAPPHIRE and GLASS JEWEL BEARINGS

Performance proved for precision and long life by world's leading makers of *electrical, aircraft and timing instruments; compasses; weather recorders; all testing, indicating and recording apparatus.*

Unset or set in screws or bushings to suit requirements. Write for brochure.

Serving industry with fine jewels since 1913

Richard H. Bird & Co., Inc.
3 Spruce Street, Waltham, Mass.

SCOPE DOLLY
Model 1

Convenient Height and Viewing Angle
Adjustable to Hold Portable Scopes
Ball Bearing Swivel Rubber Tired Casters
Lightweight Aluminum Construction
Recommended by Laboratories Wherever Used

$27.00 *Postpaid in continental U.S.A. if cash accompanies order.*

Unique Devices

Ferry Ave. at 12 St. • P.O. Box 555 • Camden 1, N.J.



2 KW VACUUM TUBE BOMBARDER OR INDUCTION HEATING UNIT

For Only $650.

Never before a value like this new 2 KW bench model "Bombarder" or high frequency induction heater . . . for saving time and money in surface hardening, brazing, soldering, annealing and many other heat treating operations

Simple . . . Easy to Operate . . . Economical Standardization of Unit Makes This New Low Price possible

This compact induction heater saves space, yet performs with high efficiency. Operates from 220 volt line. Complete with foot switch and one heating coil made to customer's requirements. Send samples of work wanted. We will advise time cycle required for your particular job. Cost, complete, only $650. Immediate delivery from stock.

Scientific Electric Electronic Heaters are made in the following range of Power: 1-2-3½-5-7½-10-12½-15-18-25-40-60-80-100-250KW.

Scientific Electric

Division of

"S" CORRUGATED QUENCHED GAP CO.

107 Monroe St., Garfield, N. J.

consider distribution of population. Furthermore, the assumptions upon which coverage and interference are computed do not consider topography.

All of the allocation plans which have been suggested to date involve locating stations in towns and cities. This is a very unsatisfactory approach to accomplishment of their stated first priority. A more realistic approach would be to locate stations by geographic coordinates only. All the stations on one channel could be arranged in a pattern which would permit the greatest number of stations on that channel. This pattern might resemble Fig. 1A. It can be extended indefinitely in all directions.

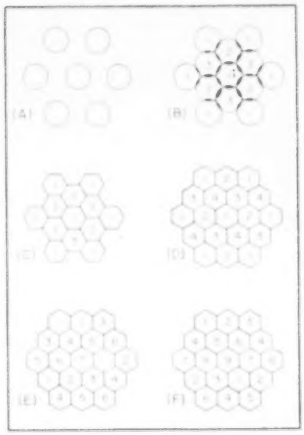

FIG. 1—Proposed allocation of television stations for most efficient use of channels

There remains considerable "white area" in Fig. 1A. This can be filled in by stations on other channels, arranged in the same pattern but shifted slightly with respect to the first. The number of channels needed to cover any area completely then becomes a simple function of the ratio of the co-channel spacing to the service area radius.

Figure 1B shows locations for stations on three channels, with a ratio of cochannel spacing to service area radius of 3.3. It can be seen that there is still a slight amount of "white area", and also some overlapping. Figure 1C shows

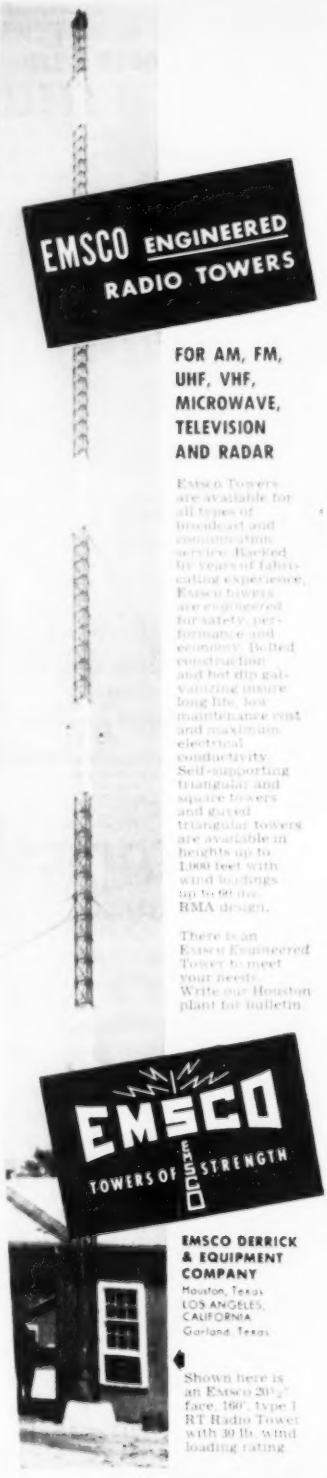
EMSCO ENGINEERED
RADIO TOWERS
FOR AM, FM, UHF, VHF, MICROWAVE, TELEVISION AND RADAR
Emsco Towers are available for all types of broadcast and communication service. Backed by years of fabricating experience, Emsco towers are engineered for safety, performance and economy. Bolted construction and hot dip galvanizing insure long life, low maintenance cost and maximum electrical conductivity. Self-supporting triangular and square towers and guyed triangular towers are available in heights up to 1,000 feet with wind loadings up to 60 lbs. RMA design.
There is an Emsco Engineered Tower to meet your needs. Write our Houston plant for bulletin.
EMSCO
TOWERS OF DUCTILE STRENGTH
EMSCO DERRICK & EQUIPMENT COMPANY
Houston, Texas
LOS ANGELES, CALIFORNIA
Garland, Texas
Shown here is an Emsco 20½" face, 160' type 1 RT Radio Tower with 30 lb. wind loading rating.

the same station arrangement as Fig. 1B, but the service areas have been altered to hexagons, each hexagon having the same area as the corresponding circle in Fig. 1B. Of course no station will provide coverage in the shape of a hexagon, but I have never seen measured coverage that was exactly circular either. Considering such factors as the nature of fringe area reception and the effects of topography, the assumption of hexagonal coverage is probably as justifiable as the assumption of circular coverage.

In Fig. 1D, E and F are shown various other possible arrangements of stations, utilizing additional channels, and providing greater relative cochannel spacing. Figure 1D provides complete coverage of any area with four channels. Twelve channels would provide complete coverage with three services.

Although this fundamental idea in its present form would hardly be acceptable to any of the parties concerned, it does represent the most effective utilization of channels, and therefore might well be utilized as the basis for some more acceptable allocation.

JAMES H. GREENWOOD
Pittsburgh, Pa.

References Omitted

DEAR SIRS:

IN MY BRIEF ARTICLE entitled "Wideband Series-Parallel Transformer Design", published in the *Electron Art* department of ELECTRONICS for July 1950, two references were omitted. One referred to unpublished Bell System Memoranda, and the other to a paper by E. K. Sandeman. The latter article was entitled, "Coupling Circuits as Band-Pass Filters," and it appeared in *Wireless Engineer*, 18, p 316, 1941.

VINCENT C. RIDEOUT
Assoc. Prof. of Elec. Engr.
The University of Wisconsin
College of Engineering
Madison, Wisconsin

(EDITOR'S NOTE. Our policy is to print all references submitted by an author, especially where they are essential to understanding the material presented. In some instances, physical factors prevent our carrying out this policy, as in the case cited above.)

VIBRATION
TESTING

- Fatigue testing
- Location of noise
- Shake testing
- Identification of resonant frequencies
- Environmental tests for Armed Services specifications

UNITED STATES TESTING COMPANY, Inc.
Established 1880
HOBOKEN, NEW JERSEY
PHILADELPHIA • BOSTON • WOONSOCKET • MEMPHIS
CHICAGO • NEW YORK • LOS ANGELES • DENVER
Member of American Council of Commercial Laboratories

Simple • Reliable • Economical
Potter decimal counter



Highest quality pretested components, conservative ratings

Four large, easy reading, bulls-eye glow lamps – replaceable socket type

All components turret-lug mounted and accessible . . . all wiring color coded

Special silver plated, self-aligning contact and rigid connectors for positive mechanical mounting

DIRECT DECIMAL READ-OUT — FOUR NEON GLOW LAMPS DESIGNATED 1-2-4-8 PROVIDE DIRECT INDICATION (0-9) AND INSTANTANEOUS LOCATION OF ANY DEFECTIVE TUBE.

STABLE OPERATION — WIDE VOLTAGE RANGE.

HIGH COUNTING RATES — UP TO 130,000 PER SECOND ABSOLUTE ACCURACY GUARANTEED.

COVERED BY BOTH I.B.M. AND POTTER PATENTS ISSUED AND PENDING

WRITE DEPT 6-T FOR COMPLETE INFORMATION AND QUANTITY DISCOUNTS

A NEW LOW UNIT PRICE OF $45.00 IS ANNOUNCED AS A RESULT OF WIDE ACCEPTANCE AND QUANTITY PRODUCTION

POTTER INSTRUMENT CO. INCORPORATED
115 CUTTER MILL RD., GREAT NECK, N.Y.

PROFESSIONAL SERVICES

AMERICAN SPEEDLIGHT CORP.
(AFFILIATED WITH J. G. SALTZMAN, INC.)
HARRY L. PARKER, PRESIDENT and CHIEF ENGINEER
Specialist in Flash and Electronic Equipment for Photography
Consultation—Development—Design and Manufacture
480 Lexington Avenue — New York 17, N. Y.

CROSBY LABORATORIES, INC.
Murray G. Crosby & Staff
Radio Electronic Engineering
Research & Development
F.M., Communications, TV
Test Equipment
Offices, Laboratory & Model Shop at
126 Herricks Rd., Mineola, N. Y.
Garden City 7-0284

DUBROW DEVELOPMENT CO.
Design — Development — Mfr.
Quality Electronic Equipment
347 S. High St. — Burlington, N. J.
Burlington 3-0446

EDGERTON, GERMESHAUSEN & GRIER, INC.
Consulting Engineers
Research Development and Manufacture of Electronic and Stroboscopic Equipment
Specialists in High Speed Photography
160 Brookline Avenue — Boston 15, Mass.

ELECTRONIC ENGINEERING CO. of CALIFORNIA
Radio and Electronic Consulting and Designing
180 S. Alvarado — Los Angeles
DUnkirk 2-7351 — California

ERCO RADIO LABORATORIES, INC.
Radio Communications Equipment
Engineering — Design — Development — Production
Pioneers in Frequency Shift Telegraph
Garden City • Long Island • New York

EDWARD A. GAUGLER, Ph.D.
Consulting Physicist
Magnetic Materials and their Applications
[illegible] — Glen Cove, Mass.
[illegible]

PAUL GODLEY CO.
Consulting Radio Engineers
GREAT NOTCH, N. J.
Est. 1926 — Little Falls 4-1000

HANSON-GORRILL-BRIAN INC.
Products & Mfg. Development
ELECTRICAL - ELECTRONIC
HYDRAULIC - MECHANICAL
One Continental Hill — Glen Cove, N. Y.
Glen Cove 4-2422

HOGAN LABORATORIES, INC.
John V. L. Hogan, Pres.
Applied Research, Development, Engineering
Est. 1929. Exceptionally competent staff. Electronics; Optics, Mechanisms, Facsimile Communication, Electro-sensitive recording media, Instrumentation.
155 Perry Street, New York 14 — CHelsea 3-7855

MEASUREMENTS CORPORATION
Research & Manufacturing Engineers
Harry W. Houck — Jerry B. Minter
John M. van Beuren
Specialists in the Design and Development of Electronic Test Instruments
Boonton, N. J.

Eugene Mittelmann, E.E., Ph.D.
Consulting Engineer & Physicist
High Frequency Heating—Industrial Electronics
Applied Physics and Mathematics
549 W. Washington Blvd. — Chicago 6, Ill.
State 2-8021

NIAGARA ELECTRON LABORATORIES
CONSULTATION — DESIGN — CONSTRUCTION
MFG. THE THERMOCAP RELAY
Specializing in solution of problems of electronic and electro-physical instrumentation for the research or analytical laboratory. Industrial plant problems also invited.
Andover, New York Cable Address: NIATRONLAB

PICKARD AND BURNS, INC.
Consulting Electronic Engineers
Analysis and Evaluation of Radio Systems
Research, Development & Design of Special Electronic Equipment
240 Highland Ave. — Needham 94, Mass.

ALBERT PREISMAN
Consulting Engineer
Television, Pulse Techniques, Video Amplifiers, Phasing Networks, Industrial Appliances
Affiliated with
MANAGEMENT TRAINING ASSOCIATES
5308-14th St., N.W. — Washington 10, D. C.

The Robert H. Streeter Co.
Electronic Design Specialists
Engineering Consultants
Representing Manufacturers of Electronic Equipment in Southern United States
Specialists in the design and construction of specialized pieces of equipment for specific applications
Tel. 97 — Greenwood, Miss.

THE TECHNICAL MATERIEL CORPORATION
Communications Consultants
Systems Engineering
General Offices and Laboratory
121 Spencer Place, Mamaroneck, N. Y.

WHEELER LABORATORIES, INC.
Radio and Electronics
Consulting—Research—Development
R.F. Circuits—Lines—Antennas
Micromate Components—Test Equipment
Harold A. Wheeler and Engineering Staff
Great Neck, N. Y. — Great Neck 2-7810

"But you can't buy that kind of a motor..."

P-14A

How many times have you heard somebody that ought to know better say something like that about motors, pumps, compressors or what-have-you? And how many times have you heard somebody else say, "Oh yes you can! I saw just what we need in Blank Company's ad yesterday." Advertising pages in this magazine are packed with news about your business. They contain information about products and services designed to help you do your job quicker, better and cheaper. To be well-informed about the latest developments in your business, your industry... and to stay well-informed... read all the ads too.

McGRAW-HILL PUBLICATIONS

CONTACTS

FOR THE FIELD OF ELECTRONICS

A EUROPEAN SOURCE OF SUPPLY *INVITES YOUR ENQUIRIES FOR*
TELEVISION & RADIO PARTS
FLUORESCENT LAMPS & ACCESSORIES

Societe Industrielle ALFA
80, rue de la Senne, Brussels-Belgium
Cables: RALFA-BRUSSELS

Manufacturers and Exporters of World-Wide Reputation

EISLER Manufactures Complete Equipment for:
SPOT WELDERS, Electric, from ½ to 250 KVA.
TELEVISION TUBE GLASS WORKING EQUIPMENT.
TRANSFORMERS, Special and Standard Types.
INCANDESCENT LAMP Manufacturing Equipment.
FLUORESCENT TUBE Manufacturing Equipment.
NEON SIGN MAKERS EQUIPMENT.
ELECTRONIC EQUIPMENT, Vacuum Pumps, etc.
WET GLASS SLICING and Cutting machines for Laboratory use
EISLER ENGINEERING CO. Inc. 751 So. 13th St. Newark 3, N. J.

The nonmelting SILICONE insulating and waterproofing compound, stable at temperatures from -70°F. to +400°F.

DOW CORNING 4 COMPOUND

MEETS ALL REQUIREMENTS OF AN-C-128a

More water repellent than paraffin. Dow Corning 4 Compound is highly resistant to oxygen, ozone and to decomposition caused by corona discharge.

POWER FACTOR up to 10 megacycles	0.001
VOLUME RESISTIVITY ohm centimeters	10^{15}
DIELECTRIC STRENGTH volts/mil	300

Write Today!

Dow Corning

FIRST IN SILICONES

DOW CORNING CORPORATION, Midland, Michigan

LEGAL NOTICE

STATEMENT OF THE OWNERSHIP, MANAGEMENT, AND CIRCULATION REQUIRED BY THE ACT OF CONGRESS OF AUGUST 24, 1912, AS AMENDED BY THE ACTS OF MARCH 3, 1933, AND JULY 2, 1946, (Title 39, United States Code, Section 233).

Of Electronics published Monthly at Albany, New York, for October 1, 1950.

1. The name and address of the publisher, editor, managing editor, and business manager is: Publisher: McGraw-Hill Publishing Company, Inc., 330 West 42nd St., New York, N. Y. Editor: Donald G. Fink, 330 West 42nd St., New York, N. Y. Managing editor: W. MacDonald, 330 West 42nd St., New York, N. Y. Business manager: Wallace B. Blood, 330 West 42nd St., New York, N. Y.

2. The owner is: McGraw-Hill Publishing Company, Inc., 330 West 42nd Street, New York, N. Y. Stockholders holding 5% or more of stock: Curtis W. McGraw, Executor of the Will of James H. McGraw, 330 West 42nd Street, New York, N. Y.; James H. McGraw, Jr., Curtis W. McGraw and Donald C. McGraw, Trustees for Harold W. McGraw; James H. McGraw, Jr., Donald C. McGraw, Curtis W. McGraw, all of 330 West 42nd Street, New York, N. Y.; James H. McGraw, Jr., and Curtis W. McGraw, Trustees for Catherine Orton, 330 West 42nd Street, New York 18, N. Y.; Edwin S. Weiss and Curtis W. McGraw, Trustees for Janet Weiss, 330 West 42nd Street, New York 18, N. Y.; James H. McGraw, Jr., 330 West 42nd Street, New York 18, N. Y.; Curtis W. McGraw, 330 West 42nd Street, New York 18, N. Y.; Donald C. McGraw, 330 West 42nd Street, New York 18, N. Y.; Harold W. McGraw, Madison, New Jersey; Grace W. Melrose, 516 Avenue St., Lasalle, Calif.

3. The known bondholders, mortgagees, and other security holders owning or holding 1 percent or more of total amount of bonds, mortgages, or other securities are: None.

4. Paragraphs 2 and 3 include, in cases where the stockholder or security holder appears upon the books of the company as trustee or in any other fiduciary relation, the name of the person or corporation for whom such trustee is acting, also the statements in the two paragraphs show the affiant's full knowledge and belief as to the circumstances and conditions under which stockholders and security holders who do not appear upon the books of the company as trustees, hold stock and securities in a capacity other than that of a bona fide owner.

MCGRAW-HILL PUBLISHING COMPANY, INC.
By D. J. A. GERARDI, Vice Pres. & Treas.

Sworn to and subscribed before me this 15th day of September, 1950.

(SEAL) ELVA G. MAXLIN

My commission expires March 30, 1952.

FINE RIBBONS
OF
TUNGSTEN and Molybdenum

Quality and accuracy in our fabrication of Tungsten & Molybdenum Ribbons have characterized our service to the Electronic industry.

A development of

H. CROSS Co.
15 Beekman St., New York 7, N. Y.

MICROMETER FREQUENCY METER
for checking transmitters, from 1 to 175 mc, within 0.0025 per cent.
LAMPKIN LABORATORIES, INC.
Bradenton, Fla., U. S. A.

ALLEN FLUXES
SODERING
BRAZING & WELDING
L. B. ALLEN CO. INC. Chicago 31, Ill.
6751 BRYN MAWR AVE.



. MPB makes more than 50 different types & sizes

Miniature ball bearings for application in precision mechanisms minimize friction and wear. High load capacity. Least weight and space. Special designs and complete engineering service for your application. Write for catalog E.

MPB MINIATURE Precision BEARINGS
INCORPORATED
KEENE, NEW HAMPSHIRE, U.S.A.

high speed *high sensitivity*
SHORTED TURN INDICATOR
The Kartron Shorted Turn and Open Circuit Coil Checker — Model 101B — indicates single shorted turns of 2 ss wire in unmounted coils. Standard mandrel 3/16 x 1/4 for all average size coils. Regulated vacuum tube circuit. Jack for audio indication to supplement 1-ma. meter. Prompt deliveries. Price $150.
KARTRON Huntington Beach, Calif.

- Contact Meters
- Pyrometers

SIM-PLY-TROL
ASSEMBLY PRODUCTS, INC.
Chagrin Falls 2, Ohio

SUB-CONTRACTING
MILITARY and COMMERCIAL
receivers — test equipment
transmitters — controls
sub-assemblies
TELETRONICS LABORATORY, INC.
Westbury, L. I., N. Y., Westbury 7-1028

EL-TRONICS, INC.
Research, development, and manufacture of electronic equipment—a single model to large quantities.
Write Today for Free Resume of Our Plant Facilities
Specialists in Geiger-Muller equipment
2647-67 N. Howard St.-Phila. 33, Pa.-GArfield 5-2026

SUB-MINIATURE PRINTED ELECTRONIC CIRCUITS
produced from your schematics or existing electronic equipment. Circuits fired on ceramics or air dried on plastics and paper bases. Confidential service.
PLASTICS & ELECTRONICS CO.
272 Northland Ave., Buffalo 8, New York

This CONTACTS *Section*

supplements other advertising in this issue with these additional announcements of products essential to efficient and economical production and maintenance. Make a habit of checking this page, each issue.

Classified Advertising Division
ELECTRONICS

SEARCHLIGHT SECTION

EMPLOYMENT • BUSINESS • OPPORTUNITIES • EQUIPMENT—USED or RESALE

UNDISPLAYED RATE:

$1.20 a line, minimum 4 lines to figure advance payment count 5 average words as a line.

INDIVIDUAL EMPLOYMENT WANTED undisplayed advertising rate is one-half of above rate, payable in advance.

PROPOSALS $1.20 a line an insertion.

INFORMATION:

BOX NUMBERS count 1 line additional in undisplayed ads.

DISCOUNT of 10% if full payment is made in advance for four consecutive insertions of undisplayed ads (not including proposals).

DISPLAYED—RATE PER INCH

The advertising rate is $12.80 per inch for all advertising appearing on other than a contract basis. Contract rates quoted on request.

AN ADVERTISING INCH is measured ⅞ inch vertically on one column, 3 columns—30 inches —to a page.

ELECT

NEW ADVERTISEMENTS received by October 29th will appear in the December issue, subject to limitation of space available.

The publisher cannot accept advertising in the Searchlight Section which lists the names of the manufacturers of resistors, capacitors, rheostats, and potentiometers or other names designed to describe such products.

ELECTRONICS ENGINEERS

with a background in patent specification writing desired for an expanding Patent Department in a growing research and development organization located in the Midwest. Unlimited opportunity for advancement for properly qualified men. Law degree unnecessary. Must be U. S. citizen and free to make occasional trips to Washington, D. C. Please give full details in first letter.

P-7752, Electronics
520 No. Michigan Ave, Chicago 11, Ill.

Physicists
Mathematicians
Electronics Engineers
Mechanical Engineers

Cornell Aeronautical Laboratory, an affiliate of Cornell University, has permanent positions open for men of project engineer caliber with advanced degrees and experience in physics, applied mathematics, electronics, and instrument design. Assignments are varied and professionally challenging in fields of pure and applied physics.

The position of our laboratory is between those of universities and commercial research institutes. We believe it combines many of the traditional advantages of both.

Inquiries will be treated as confidential; they should be addressed to

Mr. Nathaniel Stimson,
Dept. F, Cornell Aeronautical Laboratory,
P.O. Box 235, Buffalo 21, New York

ENGINEERING OPPORTUNITIES
In Westinghouse

Wanted:

DESIGN ENGINEERS
FIELD ENGINEERS
TECHNICAL WRITERS

Must have at least one year's experience.

For work on airborne radar, shipborne radar, radio communications eqpt., microwave relay, or micro-wave communications.

Good pay, excellent working conditions; advancement on individual merit; location Baltimore.

Send resume of experience and education to: Manager of Industrial Relations,

WESTINGHOUSE ELECTRIC CORP.
2519 Wilkens Ave. Baltimore 3, Maryland

NATIONAL UNION RESEARCH DIVISION

Electrical Engineers and Physicists are needed for research on Cathode Ray, Subminiature, Secondary Emission and other types of Vacuum Tubes.

Permanent interesting positions are available in the following fields:

Tube design & development
Tube processing
High vacuum systems
Solid state physics
Electron optics
Phosphorescence

Men qualified in any of the above are invited to send their resumes to:

Divisional Personnel Manager
National Union Research Division
350 Scotland Rd., Orange, N. J.

ELECTRON TUBE ENGINEERS

For Development and Production

Experience: Miniature or Sub-miniature Tubes Desirable.

Apply by letter only to:

Personnel Dept., Sonotone Corporation
Elmsford, New York

WANTED

Vacuum tube engineer, perfectly familiar with cathode ray tube and phosphor manufacture. Willing to travel to Israel.

AMERICAN TECHNION SOCIETY
154 Nassau Street, N. Y. Apply to: V. S.

REPLIES (Box No.): Address to office nearest you
NEW YORK: 330 W. 42nd St., 18
CHICAGO: 520 N. Michigan Ave., 11
SAN FRANCISCO: 68 Post St., 4

POSITIONS VACANT

ELECTRONIC ENGINEER—Senior. Graduate with at least ten years experience in receiver design. Minimum of two years experience UHF desirable. Must be capable of assuming project responsibility. Location Cedar Rapids. Excellent opportunity. Salary high. Submit resume P-7550, Electronics.

ELECTRONICS ENGINEER with Ph.D. or equivalent for position requiring initiative and versatility in work. Department of company concerned with many phases of natural gas and petroleum. Wide range field of work including instrumentation. Experience in industry desirable. Age under 40. Location Southern Ohio. Give details including training, experience, references, salary desired. P-7548, Electronics.

RESEARCH AND DEVELOPMENT Engineer for work on Electronic Switching, Control and Computing Apparatus required by S. W. London, (England) firm of remote manufacturing a variety of light mechanisms and extending their development in the electronics field. Position offers good remuneration and permanency. Candidates should have good theoretical background of wire and tape recording principles and practical experience in development. Kindly submit details of experience, age, salary required, etc., to P-7566, Electronics.

EMPLOYMENT SERVICE

SALARIED PERSONNEL $3,000-$25,000. This confidential service, established 1927, is geared to needs of high grade men who seek a change of connection under conditions assuring employer's full protection to present position. Send name and address only for details. Personal consultation invited. Jim Thaser Jennings, Dept. L, 141 Orange St., New Haven, Conn.

(Continued on page 280)

Additional
Positions Vacant Ads
on pages 279, 280 & 281

SENIOR ELECTRONIC CIRCUIT PHYSICISTS

for

Advanced Research and Development

MINIMUM REQUIREMENTS:

1. M.S. or Ph.D. in Physics or E.E.

2. Not less than five years experience in advanced electronic circuit development with a record of accomplishment giving evidence of an unusual degree of ingenuity and ability in the field.

3. Minimum age 28 years.

Hughes Aircraft Company

Attention: Mr. Jack Harwood

CULVER CITY, CALIFORNIA

MECHANICAL DESIGN ENGINEERS

COLLINS RADIO COMPANY, one of the leading manufacturers of radio and electronics equipment, has openings for mechanical design engineers. The work calls for the ability to lay out and design intricate mechanisms consisting of fine pitch gears, cams, and linkages as well as sheet metal structures. A thorough knowledge of working tolerances applicable to the above design functions is essential. Good advancement opportunities, excellent working conditions. Send resume of education and experience to:

Glenn G. Johnson
COLLINS RADIO COMPANY
Cedar Rapids, Iowa

ANALOGUE COMPUTER ENGINEER

Experienced graduate electrical engineer with extensive background in analogue computer development, required to supervise analogue computer section. This engineer must be able to assume full technical responsibility and planning for projects ranging from single equipments to complete system development. Here is a life time opportunity for the individual who can organize a rapidly expanding facility. Submit detailed resume. Personal interview will be arranged.

ENGINEERING RESEARCH ASSOCIATES, INC.
1902 West Minnehaha Avenue
St. Paul 4, Minnesota

ENGINEERS— PHYSICISTS

SENIORS

- *What do you want in a position?*
- *What are your aims and ambitions?*

The W. L. Maxson Corporation offers special opportunities if you are heavily experienced in research and development on radar, computers and associated equipment.

Please address your job requirements and resume to A. Hoffsommer for individual attention.

THE W. L. MAXSON CORPORATION
460 W. 34th St., N. Y. 1, N. Y.

RCA VICTOR Camden, N. J.

Requires Experienced Electronics Engineers

RCA's steady growth in the field of electronics results in attractive opportunities for electrical and mechanical engineers and physicists. Experienced engineers are finding the "right position" in the wide scope of RCA's activities. Equipment is being developed for the following applications: communications and navigational equipment for the aviation industry, mobile transmitters, microwave relay links, radar systems and components, and ultra high frequency test equipment.

These requirements represent permanent expansion in RCA Victor's Engineering Division at Camden, which will provide excellent opportunities for men of high caliber with appropriate training and experience.

If you meet these specifications, and if you are looking for a career which will open wide the door to the complete expression of your talents in the fields of electronics, write, giving full details to:

National Recruiting Division
Box 920, RCA Victor Division
Radio Corporation of America
Camden, New Jersey

NEEDED AT ONCE

Experienced

Physicists, Chemists and Engineers— Mechanical, Electrical, Electronic and Chemical

For Work on an Atomic Energy Project in the San Francisco Bay Area

by

CALIFORNIA RESEARCH & DEVELOPMENT COMPANY

Airmail complete summary education, training, experience, expected salary, and references to Standard Oil Company of California—Employment Office, 225 Bush Street, San Francisco 20, California

PHYSICISTS SR. ELECTRONIC ENGINEERS

Familiar with ultra high frequency and micro wave technique.
Experience with electronic digital and/or analog, computer research and development program.
Salaries commensurate with experience and ability. Excellent opportunities for qualified personnel.

Contact:
C. G. Jones, Personnel Department
GOODYEAR AIRCRAFT CORPORATION
Akron 15, Ohio

Additional Positions Vacant Ads on pages 278, 280 & 281

WANTED

Radio engineer, familiar with V.H.F. antennas, circuits and equipment. Willing to travel to Israel.

AMERICAN TECHNION SOCIETY
154 Nassau Street, N. Y. Apply to: V. S.

ELECTRICAL ENGINEER

Graduate electrical engineer with a minimum of 2 years experience. For design and development of audio transformers and filters. Permanent position with progressive firm located in Chicago. Give details stating age, education, experience, references, availability for work and salary expected.

P-7849, Electronics
330 W. 42nd St., New York 18, N. Y.

Engineers · Executives · Technical Men

Salaried Positions, $4,000 to $30,000. This Confidential service for men who desire a new connection, will develop and conduct preliminary negotiations without risk to present position. Send name and address for details.

TOMSETT ASSOCIATES
1207-2 Berger Bldg., Pittsburgh 19, Pa.

ENGINEERS

Send brief qualification record for free listing of all current openings in your field. Rapid, confidential, nationwide service.

BOULEVARD ENGINEERING PERSONNEL SERVICE
116 S. Michigan, Dept. B-1, Chicago 3, Ill.

EMPLOYMENT SERVICE

(Continued from page 278)

POSITION WANTED

GLASS BLOWING
IN ALL ITS BRANCHES

Special tubes, Lamps, Vacuum, Rare Gases etc. Developed or made to Specification. Kovar, Tungsten, Copper seals. Vacuum Pumps, Glass or Metal.

IN STOCK AT VERY LOW PRICES

Tungsten, Moliy, Tantalum, Kovar, etc. in Wire, Ribbon, Strips, Mesh, Tubes, etc., also other materials and equipment used in the Vacuum, Radio Tubes, Lamps, in Industry and Laboratories.

F. ALEXANDER
115 W. 23d St. New York 11, N. Y.

SMALL PARTS

Made to "watchmaker's tolerances".

Mechanical, electromechanical, small instrument. Small parts designed, manufactured, sub-assembled by long established manufacturer.

Precision Products Division

OSTBY & BARTON CO.
118 Richmond St., Providence, R. I.

WHAT DO YOU NEED?
WHAT HAVE YOU TO SELL?

ELECTRONIC
SURPLUS

GOULD GREEN, 252 GREENWICH ST., N.Y.C. 7

GOV'T SURPLUS

Ceramicons, micas, bathtubs, oils, sockets, trimmers, chokes, Xformers, pots, relays, synchros, Link Xmitters.

EMPIRE ELECTRONICS
Box 102
LEFFERTS STATION, BROOKLYN 25, N. Y.

SHEET METAL MACHINERY

NEW and Used—Brakes—Shears Forming Rolls — Folders — Punches — Di-Acro, Pexto, Niagara & Whitney Equipment.

B. D. BROOKS CO., INC.
HAncock 6-5200
361 Atlantic Ave., Boston 10, Mass.

HIGH TENSION CABLE

Portable. Shielded. #10 AWG. Neoprene Jacket. Will bury 25,000 VAC or 35,000 VDC.

$364.00 1000 ft.

CUNNINGHAM ENGINEERING CO.
Beaumont, Texas

NEW PATENTED PRODUCTS

for license to established manufacturers

1. Acyclic Generators (non-cycling D.C.)
2. Power Switching Tubes (for utilities)
3. Electronic Circuit Breakers (power)
4. Electronic Capacitor Switching (automatic power factor control)

CELAB—Box 165, Palm Springs, Calif.

WHAT TO SELL UNCLE SAM TODAY

The government buys thousands of electronic assemblies and components every day. Our service tells you daily what you can supply to Uncle Sam. For sample list: Dept. D.

THE TAUB CO.
710 W. 173 St. New York 32, N. Y.

ARE YOU READY TO HANDLE Large GOVERNMENT CONTRACTS?

Washington, D. C. organization with wide contacts in military agencies, personnel experienced handling large, govt. electronic contracts can accept 3 or 4 accounts. Service includes assistance in preparation, submission and securing of govt. contracts, obtaining priorities and allocations for scarce materials, and administration of contracts. Retainer plus bonus.

SS-7881, Electronics
330 W. 42nd St., New York 18, N. Y.

WANTED

INSULATORS; POLE LINE HARDWARE; GUY STRAND WIRE; COPPERWELD WIRE; WESTERN ELECTRIC TOOLS; SPLICING SLEEVES.

VICTOR-BERNARD INDUSTRIES
NE Cor. 22nd & Lehigh Aves., Phila. 32, Pa.

WANTED
WESTERN ELECTRIC VACUUM TUBES

Types 101F, 102F, 272A, 274A or B, 310A or B, 311A, 313C, 323A, 328A, 329A, 348A, 349A, 352A, 373A, 374A, 393A, 394A, 121A Ballast Lamps.

W-6863, Electronics
330 W. 42nd St., New York 18, N. Y.

WANTED

Tubes, Test equipment, Condensers, & general inventories. Highest prices paid.

W-7965, Electronics
330 W. 42nd St., New York 18, N. Y.

WANTED

Boonton 160A, 170A Q Meter; GR916A RF bridge, GR 736A Wave Analyzer
Give details to
W-7720, Electronics
330 W. 42nd St., New York 18, N. Y.

WANTED

Teletypewriters complete, components or parts. Any quantity and condition.

W-6864, Electronics
330 W. 42nd St., New York 18, N. Y.

Will Buy All
BC-348'S WITH DYNAMOTORS

Letters "P" "N" & "Q" ..... $60.00 ea.
All others except "C" ..... $50.00 ea.
Ship via Express C.O.D. subject to Inspection—TO

HELEN FINNEGAN
49 Washington St. Little Ferry, N. J.

WANTED TO BUY

PRIVATE LABORATORY Wishes To Purchase For Its Own Use High Grade Test Equipment and Basic Radio Components. Replies Held in Confidence.

W-7719, Electronics
330 W. 42nd St., New York 18, N. Y.

ELECTRONICS
Sales Engineers

Positions open for sales engineers having practical experience in application of radio frequency heating. A good knowledge of electronics and of mechanisms, such as are used in quantity production lines, is a requirement. The work involves application engineering and sales of induction and dielectric heating generators and associated work handling apparatus. Locations in Detroit, Boston, Buffalo and Richmond, Virginia. For application write:

Manager, Technical Employment
Westinghouse Electric Corporation
306 Fourth Avenue
Pittsburgh 30, Pennsylvania

RESEARCH AND DEVELOPMENT ENGINEERS

MECHANICAL, ELECTRICAL, and ELECTRONIC ENGINEERS and ENGINEERING PHYSICISTS

Excellent positions on experimental research and development projects related to intricate electro-mechanical and electronic devices.

Men with advanced degrees or equivalent experience may qualify for permanent positions in our laboratories in New York State.

Give full details of education and experience indicating age and marital status.

P-7894, Electronics
330 W. 42 St., New York 18, N. Y.

ELECTRONIC ENGINEERS

SENIOR ENGINEERS or PHYSICISTS
Degree and experience in Radar, Pulse Circuits, Digital or Analogue Computers, or Servomechanisms
JUNIOR ENGINEERS and recent graduate in EE or Physics.

ELECTRONIC ENGINEERING COMPANY
180 S. Alvarado St. Los Angeles, Calif.

WANTED

Acoustic or Audio Engineer

Position available in research and development on loudspeakers and microphones. College training plus several years practical experience required. Applicant should be fairly well grounded in the theories of vibrating systems, audio reproduction and laboratory technique pertaining to audio and acoustic measurements. Engineer who has had employment with a loudspeaker manufacturer would be most desirable.

A progressive concern with extensive and up-to-date research facilities located in New York suburban area.

Salary liberal and open depending upon qualifications of applicant.

P-7907, Electronics
330 W. 42nd St., New York 18, N. Y.

ELECTRONICS TECHNICIANS WANTED

The RCA Service Company, Inc., a Radio Corporation of America subsidiary, needs qualified electronics technicians for U.S. and overseas assignments. Candidates must be of good character and qualified in the installation or maintenance of RADAR or COMMUNICATIONS equipment or TELEVISION receivers. No age limits, but must have at least three years of practical experience.

RCA Service Company offers comprehensive Company-paid hospitalization, accident and life insurance programs; paid vacations and holidays; periodic review for salary increases; and opportunity to obtain permanent position in our national and international service organization, engaged in the installation and maintenance of AM, FM and TV transmitters, electronic inspection devices, electron microscopes, theatre and home television, R-F heating equipment, mobile and microwave communications systems, and similar electronic equipment.

Base pay, overseas bonus, payments for actual living and other expenses, and benefits mentioned above add up to $7,000 per year to start for overseas assignments, with periodic review of base salary thereafter. Openings also available at proportionately higher salaries for specially qualified technicians with supervisory ability.

Qualified technicians seeking an advantageous connection with a well-established company, having a broad-based, permanent peacetime and wartime service program, write to:

MR. G. H. METZ
Personnel Manager
RCA SERVICE COMPANY, INC.
Camden 2, New Jersey

ELECTRONIC
INSTRUMENTATION ENGINEERS

Manufacturer of meteorological instruments requires

PROJECT ENGINEERS

Experience in computer circuits, marker generators, display networks and pulse modulator design mainly for airborne equipment. Design experience with subminiature components is desirable.

PROJECT ENGINEERS

Several years experience in micro-wave techniques in the 1 centimeter region, capable of designing antennas, direction couplings, mixers, etc.

ENGINEERS

Experience in the design of transformers, coils, etc., for electronics equipment.

Send complete resume to:

Personnel Department

Friez Instrument Division
Bendix Aviation Corporation
Taylor Avenue at Loch Raven Blvd.
Baltimore 4, Md.

RADAR, COMMUNICATIONS *and* SONAR TECHNICIANS
WANTED

For Overseas Assignments

Technical Qualifications:

1. At least 3 years' practical experience in installation and maintenance.
2. Navy veterans ETM 1/c or higher.
3. Army veterans TECH SGT or higher.

Personal Qualifications:

1. Age, over 22—must pass physical examination.
2. Ability to assume responsibility.
3. Must stand thorough character investigation.
4. Willing to go overseas for 1 year.

Base pay, bonus, living allowance, vacation add up to $7,000.00 per year. Permanent connection with company possible.

Apply by Writing to
A-1, P. O. Box 3414
Philadelphia 22, Pa.

Men qualified in RADAR, COMMUNICATIONS or SONAR give complete history. Interview will be arranged for successful applicants.

ELECTRONIC ENGINEERS

Los Angeles Firm

DESIGN ENGINEER

Minimum five years experience in electronic development and circuit design for production.

PRODUCTION ENGINEER

Several years experience in electronic equipment production. Experience desirable both in large quantity commercial equipment and high quality equipment to government specifications.

P-7861, Electronics
1111 Wilshire Blvd., Los Angeles 17, Calif.

Additional Positions Vacant Ads on pages 278, 279 & 280

ABSOLUTE SALE AT PUBLIC AUCTION!

Without Limit or Reserve

One of the largest inventories in the U.S.

OF

ELECTRONIC COMPONENTS AND EQUIPMENT

Being the complete inventory no longer required for present operations

OF THE

ELECTRO SALES CO., INC.,

TO BE SOLD ON THE PREMISES

399-405 ATLANTIC AVE., BOSTON, MASS.

TUESDAY & WEDNESDAY, Nov. 14th & 15th at 10 A.M.

Inspection: Nov. 8th to sale date. 10 A.M. to 4 P.M. ***(Saturday & Holiday excepted)***

10,000 ELECTRIC MOTORS

Mostly Fractional HP. Some Gear Reduction Types, Synchros, Autosyns, Inverters, Dynamotors, Generators, Amplidynes.

SWITCHES, Thousands—Mallory, C-H, H&H, Mirco, Mossman, GE, in all styles—Push, Toggle, Gang, Water, etc.

WIRE, Hookup, Coaxial, Television, Guy, Telephone Shielded and Unshield. Mostly Radio Sizes.

RECTIFIERS, In excess of 10,000. Small and Large. Selenium and Copper Oxide.

CAPACITORS, In excess 100,000. Fixed-Postage, Tubular, Bathtub, Mica, Paper, Oil Filled. Receiving and Transmitting Types.

15,000 Transformers & Chokes

Plate and Filament, Power, Audio, Modulation, Stepdown, etc. by Raytheon, G.E., UTC, Westinghouse, etc.

RESISTORS, Composition, Wire Wound, Fixed and Variable. All types and makes represented.

SOCKETS, PLUGS & JACKS,

In excess 75,000. AN & Coaxial Connectors, Tube and Lamp Sockets. Amphenol, Cannon, Jones, etc.

FUSES & FUSE HOLDERS,

Quantity in excess 200,000. Cartridge and Glass. Commercial, Aircraft and Telephone Types. Fuse Blocks, Links and Clips.

5000 Meters & Test Equipment

Switchboard, Panel, Portable, etc. All Types and kinds Weston, G.E., Westinghouse, J.B.T., General Radio, etc.

AIRCRAFT INSTRUMENTS, Large quantities—Transmitters, Temp. Gauges, Indicators, Gyros, Magnesyns, Altimeters, Repeaters, etc.

POTENTIOMETERS & RHEOSTATS,

Tremendous Quantities—all ohmages and wattage. IRC, AB, Clarostat, CTS, Mallory, DeJur, etc.

CONDENSERS, Variable Micro Trimmers, Padders, etc. Hammarlund, Bud, Johnson, National and others.

LAMPS, All Types—Miniature, Aircraft, Auto, Household, etc. Many Neon & Argon. Quantity in excess 100,000.

50,000 RELAYS

All types and voltages, AC & DC including time delay & thermal—Cramer, Westinghouse, Allied, Struthers Dunn, Edison, G.E., etc.

HARDWARE, Extraordinary Quantities. Brass, Stainless Steel, Steel Bolts, Nuts, Screws, Lugs, Washers, Spacers, Terminals, Gromets, Couplings, etc.

PILOT LIGHT ASSEMBLIES

Excess 20,000. ½" & 1" all colors. Aircraft and Commercial Types, Dialco, Drake, Kirkman, etc.

Tapes, Spaghetti, Cords & Cord Sets

Headsets, Coils, Chokes, Circuit Breakers, Tubes, 40,000 Knobs, Gauges, Thermometers, Metal Spare Parts Boxes, Sheet Bakelite & Aluminum, Paint.

ELECTRONIC EQUIPMENT

SCR-625 Mine Detectors, SCR-274N Equipment, TBY & BC-604 Transmitters, Battery Chargers, Dust Collectors, Blowers, Soldering Irons, Interlocks, Wet Cell Batteries, Voltage Regulators, Flashlights, Telephone Equipment and Parts, Aircraft Equipment & Components.

Space does not permit the listing of more than a few representative types of materials, but sales lots are now being established and detailed descriptive catalogs are in preparation—WRITE OR WIRE FOR YOUR COPY TODAY. To anyone interested in obtaining bulk quantities of Electronic Materials, this sale offers a very exceptional opportunity.

SALE IS BY ORDER OF ELECTRO SALES CO., INC., OWNERS

Terms: 25% deposit required in accordance with our usual terms & conditions.

T. R. GROSSMAN & COMPANY

AUCTIONEERS

27 SCHOOL ST., BOSTON 8, MASS. LAfayette 3-5838

MICROWAVE

23,000 to 27,000 mc. BENCH TEST PLUMBING

½" to ¼" Waveguide

Precision Slotted Line. Adjustable probe $200.00
Directional Coupler-Wavemeter Mnt. 2200 ..... $60.00
Precision Var Attenuator, mfg. Bernard Row $90.00
Low Power Load $20.00
Shunt Tee $15.00
Waveguide Lengths, 2" to 6" long, gold plated with circular flanges and coupling nuts ..... $2.25 per inch
APS-34 Rotating Joint $49.50
Right Angle Bend E or H Plane, specify combination of couplings required $12.00
45° Bend E or H Plane, Choke to cover $12.00
Directional coupler CU-105/APS02 ..... $49.50
Mitered Elbow, cover to cover $4.00
TR-ATR-Section, choke to cover $4.00
Flexible Section 1" choke to choke $5.00
"S" Curve Choke to cover $4.50
Adaptor, round to square cover $5.00
Feedback to Parabola Horn with pressurized window $27.50
Low Power Load, less cards $18.50
K Band Mixer Block $45.00
Waveguide ⅜ to ¼" ..... $1.00 per ft.
90° Twist $10.00
"K" Band Directional Coupler (1.10 APS 14 2c DH $49.50
1231 Magnetrons $55.00

8500 Mc to 9600 Mc BENCH TEST PLUMBING

1" x ½" Waveguide

Klystron Mount, DeMornay Bodd type DB580 for 2K25, etc., includes tunable termination $70.00
Variable Stub Tuner, DB526, 180 degree phase shifter capacity $70.00
Flap Attenuator, DB583, Maximum Attenuation 100db $25.00
Wave Guide to Type "N" Adapter, DB527 ..... $15.00
Low Power Termination, DB581 ..... $18.50
Uni-Directional Coupler, DB580, 20DB type "N" output $18.50
Pick Up Horn, Type "N" output $4.50
Wavemeter, 8500 to 9600 mcs, with calibration. Micrometer adjust head. Reaction type $85.00
Waveguide Lengths, Plated and fitted with couplings available in 12", 24", 36", 60" sections ..... $2.00 per ft.
90 Degree Elbows, E or H plane, 2" radius $12.50
Mitered Elbows, E plane $10.00
90 Degree Twist, 6" long $8.00
Bulkhead Feed-Thru Assembly $15.00
Pressure Gauge Section, 1½ lb. and press. nipple $10.00
Pressure Gauge, 15 lbs. $2.50
Dual Oscillator-Beacon Mount, P/O APS10, Radar for mounting 723A/B klystron with crystal matching slugs, shields $42.50
Dual Oscillator Mounts, Back to back with crystal mount, tunable terminations, attenuating slugs $18.50
Directional Coupler, UG 40/U, Tap-off 20 DB $17.50
Directional coupler, APS 6 type, 20 Tap-off 20 DB calibrated $17.50
Rotary Joint Choke to Choke $10.00
2K25/723 AB Receiver local oscillator Klystron Mount, complete with crystal mount, E-H coupling and choke coupling to TR $22.50
TR-ATR Duplexer section for above $8.50

1¼" x ⅝" WAVEGUIDE

Tunable Termination. Precision adjust $65.00
Low Power Termination $25.00
Magic Tee $45.00
Oscillator Mount, for four 723 A/B $38.50
90 Degree Elbows, E or H plane $12.50
Waveguide Lengths, Cut to size and supplied with 1 choke, 1 cover, per length ..... $2.00 per ft.
Wavemeter, Absorption type. Precision micrometer adjust. Very high "Q" $150.00

6000 Mc to 8500 Mc BENCH TEST PLUMBING

1½" x ¾" Waveguide

Klystron Mount, DB584 complete with shield and tunable termination $125.00
Flap Attenuator, DB585 ..... $45.00
Variable Stub Tuner $90.00
Waveguide to Type "N" Adapter $18.50
Wavemeter, Tee, DB582 ..... $32.50
Magic Tee $80.00
Directional Coupler, twin hole 20DB type "N" output $25.00
Precision Crystal Mount, Equipped with tuning stub and tunable termination $125.00
Tunable Termination, Precision adjust $70.00
Low Power Load $15.00

4000 to 6000 Mcs BENCH TEST PLUMBING

2" x 1" Waveguide

Slotted Line, DeMornay type 532 complete with probe, etc. $600.00
Flap Attenuator $48.00
Variable Stub Tuner and Low Power Termination $48.00
Wavemeter Tee $48.00
Adapters: Choke to choke $18.00
Cover to cover $14.00
Choke to cover $16.00
Waveguide to Type "N" Adapter $45.00
Directional Coupler, Two hole type, type "N" output $48.00
Klystron Mount, Equipped with tuning, matching and micrometer adjust, klystron antenna tuning $110.00
Crystal Mount, Equipped with tunable termination and micrometer adjust crystal tuning $125.00
Tunable Termination, Precision adjust $90.00

3000 Mc BENCH TEST PLUMBING

TEST EQUIPMENT

10 CM Wavemeter WE type B435490 Transition type, type N Fittings, Vernier Reg. Micrometer dial, Gold Plated, W Calib. Chart, P/o Freq. Meter 9060A. New $99.50
ASIA AP-10 CM Pick up Horn, with "N" Cable $4.50
LHTR LIGHTHOUSE ASSEMBLY. Part of RT-28 APG 5 & APG 15. Receiver Test Trans Cavities w/ matching cavities and Type N CPLG. To Rec. Line 2440, 2616, 1B27. Tunable APX 2500-3000 Mc. Silver Plated $49.50
Beacon Lighthouse cavity 10 cm with miniature 28 volt DC FM motor. Mfg. Bernard Row ..... $47.50 ea.
Magnetron to Waveguide Coupler with 721A Duplexer cavity, gold plated $45.00
721A TR Box complete with tube and matching components $12.50
McNally Klystron Cavities for 2K25, 2K26. These tubes available $4.00
F-28-SPR-2 Filters, Type "N" Sp. gold plated output $12.50
726 Klystron Mount, Tunable output, to type "N" complete, with socket and matching tuning stub $12.50
WAVEGUIDE TO 7/8" RIGID COAX TRANSITION. ADAPTER, CHOKE FLANGE, SILVER PLATED BRONZE BAND $12.50
WAVEGUIDE DIRECTIONAL COUPLER, 27 db Navy type CAHV 47 AAN, 2" to 1" slotted section $32.50
SQ. FLANGE to rd choke adapter, 15 in long UA 1½ in x 3 in. slide, type "N" output and sampling probe $27.50
AN/APR5A 10 cm antenna equipment consisting of two 10 cm waveguide sections, each polarized 3 inches ..... $75.00 pr.
POWER SPLITTER: 726 Klystron input final "N" output $5.00

7/8" RIGID COAX

10 CM FEEDBACK DIPOLE ANTENNA, in turtle hull, for use with hemisphere 7/8" Rigid Coax Input $8.00
721A TR cavities, heavy silver plated ..... $2.00 ea.
Magnetron Coupling with TR Loop $7.50
Sperry Rotating Joint, pressurized $22.50
5 Ft. Lengths Stub Supported, gold plated $7.50
Short Right Angle Bends (for above) $2.50

RADAR SYSTEMS AND COMPONENTS IN STOCK

APS-2
10 CM Airborne
APS-3
3 CM Airborne
APS-4
3 CM Airborne
APS-6
3 CM Airborne
APS-6A
3 CM Airborne
APS-10
3 CM Airborne
APQ-13
3 CM Airborne
APS-15
3 CM Airborne
APS-31
3 CM Airborne
CPN-8
10 CM
Ground Beacon
CEXH
10 CM
Ground Beacon
FD-MARK 4
800 MC
Ship Gunlaying
MARK 10
10 CM
Ship Gunlaying
SA
200 MC
Ship Air Search
SC
200 MC
Ship Air Search
SD
200 MC
Submarine
SE
10 CM
Surface Search
SF
10 CM
Surface Search
SG
10 CM
Surface Search
SJ
10 CM
Submarine
SK
200 MC
Air Search
SL
10 CM
Surface Search
SN
10 CM Portable
SO (All Series)
10 CM
Surface Search
SQ
10 CM Portable
SW
200 MC Portable
SCR 51B
400 MC
Altimeter
SCR 520
10 CM Airborne
SCR 533
200 MC
Airsearch
SCR 545
10 CM Tracking
600 MC Search
SCR 663
Searchlight
Track

SONAR SYSTEMS AND COMPONENTS IN STOCK

QBF
QBG
QC
QCJ
QCL
QCO
QCS
QCU
WEA

ARMY-NAVY TEST SETS

LU-1 FREQ. Meter and Test Oscillator. Type CHV-60ACL. ..... $
TVN-9KU POWER SUPPLY, MIT. Rad. Lab. ..... $
TVN-8SE KLYSTRON POWER SUPPLY, MIT. Rad. Lab. ..... $
CS60ABW WATT METER — Waveguide, 2 CM ..... $
APRS RECEIVER. 1000 to 6000 mcs ..... $
AN/CPN-8 10 centimeter 40 kw output RF package. Includes magnetron oscillator, complete modulator, complete receiver, complete signal and power analyzer with 5" scope. 115V AC input ..... $
Dehydrator Unit CPD 1d137 Automatic cycling. Compressor to 50 lbs. Compl. for Radar XSMN. Like New $425.00
SO-3 Receiver, 20 mc. IF, 6 stages, 6AC7, 10 MC Band width Input, 5.1 mc. B.W. per stg. 2.6 volt gain per stage as desc. in ch. 13 vol. 23, M.I.T. Rad. Lab. Series $99.50
TS12 2CM Slotted Line
TS13 2CM Signal Generator
TS33 3CM Frequency Meter
TS35 3CM Signal Generator
TS36 3CM Power Meter
TS45/APM3 3CM Signal Generator
TS62 2CM Echo Box
TS102
TS108 Dummy Load

MICROWAVE ANTENNAS

RELAY SYSTEM PARABOLIC REFLECTORS approx. range 2000 to 6000 mc. Dimensions: 4' x 3' rectangle, new $35.00
TDY "JAM" RADAR ROTATING ANTENNA. 10 cm. 50 deg. beam ..... $
SO-13 ANTENNA 24" dish with feed-back dipole 360 deg. rotation, complete with drive motor and selsyn. New $128.00
Used $45.00
OBM ANTENNA. Dual, back to back parabolas with dipoles. Freq. cover age 1,000-4,500 mc. No drive mechanism $65.00
AS125 APR cone type receiving antenna, 1000 to to 3200 megacycles. New $4.50
140-800 MC. CONE type antenna, complete with 21' sectional steel mast, guys, cables, carrying case, etc. New $19.50
ASD 3 cm. antenna, used, ex. cond. $49.50
YAGI ANTENNA AS-46A APG-4, 5 elements ..... $14.50 ea.
Dish for Parabola 36" $4.85
AN 122 ..... $22.50
RC 224 ..... $99.50
AS 17-APS
DAK Directional Finder Loops
Adcock Arrays
SA-1 Radar
200 MC Bed Spring
LPZ1-A Airborne Dir. Find. Loop, w/ Selsyn & Loop Housing
APS 4 Ant.
AN 128A 200 MC. Array
Write for Info and Price

PULSE TRANSFORMERS

G.E.K.-2745 ..... $39.50
G.E.K.-2741-A. 11.5 KV High Voltage 5.2 KV Low Voltage. 200 KW type. 1270 KW max. 1 microsec. or ¼ microsec. or 600 PPS $39.50
W.E. #166173 Hi Volt input transformer, W.E. impedance ratio 50 ohms to 900 ohms. Freq. range 10 kc to 2 mc. 2 sections parallel connected, potted in oil $16.00
W.E. KS 9800 Input transformer. Winding ratio between terminals 3-5 and 1-2 is 1:1:1, and between terminals 6-7 and 1-2 is 2:1. Frequency range: 180-520 c.p.s. Permalloy core $6.00
G.E. #K2731 Repetition Rate: 600 PPS. Pri. Imp. 50 Ohms Sec. Imp. 450 ohms. Pulse Width: 1 Microsec. Pri. Input: 9.5 KV PK. Sec. output: 2¾ KV PK. Peak output: 500 KW. Rise: 2.75 Amp. $64.50
W.E. #D169272 Hi Volt Input pulse Transformer $27.50
G.E. K2450A. Will receive 18KV, 4 micro-second pulse on pri. secondary delivering 18KV. Peak power out 100KW. G.E. $34.50
G.E. #K2748A. Pulse Input, line to magnetron $36.00
#2262 Line Pulse or Blocking Oscillator XFMR Freq. limits 790 810 cycs winding turns ratio 1:1:1 Dielectrons 1.15 16 x 1¾" 19-72 ..... $1.50
Pulse 171 AWP L 42145 ..... $6.00
Pulse 134 BW 28" L 440895 ..... $2.25
RAY WX42988 ..... $39.50
G.E. K6643 ..... $50.00
G.E. K9216945 ..... $50.00
#7766489-9332
A 7766490

PULSE NETWORKS

15A—1-100-5C: 15 KV, "A" CKT, 1 microsec, 400 PPS, 50 ohms imp. $42.50
G.E. #8E15 200-5PPF, 6KV, "E" circuit, 3 sections, 5 microsecond, 2000 PPS, 50 ohms impedance, 3 sections $6.50
G.E. #3E 15 84 810 8 2 24 405 5PPF 8KV, "E" CKT Dual Unit. Unit 1, 3 sections, .84 Microsec $8.50
810 PPS, 50 ohms imp. Unit 2, 8 Sections, 2.24 microsec 405 PPS, 50 ohms imp. $6.50
7.5E3-1-200-6PP 7.5 KV, "E" circuit, 1 microsec, 200 PPS, 67 Ohms impedance, 3 sections $7.50
7.5E4-16-60-6PP 7.5 KV, "E" circuit, 16 microsec, 60 PPS, 67 ohms impedance $15.00
7-5E3-3-200-6PT 7.5 KV, "E" Circuit, 3 microsec 200 PPS, 67 ohms imp. 3 sections $12.50

MAGNETRON MAGNETS

Gauss	Pole Diam.	Spacing	Price
1850	⅞ in.	⅝ in.	$12.50
5200	11/32 in.	⅝ in.	$17.50
1300	1⅝ in.	1 5/16 in.	$12.50
1860	1⅝ in.	1¼ in.	$14.50

Electromagnets for magnetrons ..... $24.50 ea.

GE Magnets type M7765115, GE Distance Between pole faces variable, 2 1/16" (1900 Gauss) to 15" (700 Gauss) Pole Dia. 1 ⅝". Now Part of SCR 584 ..... $34.50



MAGNETRONS

	QK 61 2132	2161	720EY
	QK 60 2127	2162	725-A
	2124	2136	3131	710-A
	2122	2139	5130	728
	QK 915 2126	2140	714AY	706
	QK 62 2127	2149	718DY	700
	QK 59 2131	2134	720BY	

Klystrons 723A, 707B, 417A, 2K41

UG CONNECTORS COUPLINGS

UG/15U	$ .75
UG206U	.90
UG87U	1.25
UG27U	1.00
UG21U	.80
UG167U	2.25
UG29U	.90
UG254U	1.60
UG86U	1.40
UG342U	3.25
UG85U	1.45
UG58U	.60
UG9U	.80
UG102U	.40
UG103U	.45
UG255U	1.65
UG 46/U Spacf. for Mixer Assy.	.75
UG 40A	1.10
UG 343 Cover	2.35
UG 344 Choke	3.00
UG 425 Contact	2.00
UG 116 Cover & Coup Ring	1.95
UG 117 Choke	2.50
UG 51 Cover	1.00
UG 52 Choke	1.15
UG 210 Cover	1.85
UG 212 Choke	2.10
¼ Coax Female Ring	.50
¼ Coax Male Fitting	.95
X Band Circ. Choke Flange	.50
X Band Flat Contact Flange ¼ Thk	.25
Contact Ring ¼" Thk	.25
⅛ dia. hole	.25
UG 53/U, Cover	4.00
UG 54/U, Choke	4.75
UG 55/U, Cover	4.00
UG 56/U, Choke	4.75
UG 65/U, Contact	6.50
UG 149/U, Cover	3.00
UG 148/U, Choke	4.00
UG 150/U, Contact	3.00
UG 39/U, Cover	.60
UG 40/U, Choke	.80

Write us your needs.

FILAMENT TRANSFORMER

for above 115V 60 cy Pri. four 6.3V 4A Sec. 50000VT $27.50
Magnetron Kit of four QK's 2675-4375 inc. w/trans special $250.00

All merch. guar. Mail orders promptly filled. All prices F.O.B. N.Y.C. Send M.O. or Chk. Only shipping chgs. sent C.O.D. Rated concerns send P.O.

COMMUNICATIONS EQUIPMENT CO.

MIN. ORDER $3.00

131 Liberty St., New York, N. Y. Dept. E-11 P. J. PLISHNER **Phone: MAin 4-8373**

SCREW MTG Wireleads D Type

Mfd	Volt	Price
4	600	$0.55
8	250	.25
8-8	450	.50
16	450	.65
20	450	.65
30	450	.50
40	250	.65
12	250	.50
8	600	.60
8	450	.50
16	600	.80
30	450	.50
20	150	.50
240	250	.80
30-30	450	.75

MINICAPS PIGTAIL

Mfd	Volt	Price
30	450	$0.49
30	300	.45
30	350	.60
40	450	.50
40	525	.70
16	350	.55
16	525	.65
16	450	.60
16	100	.24
20	25	.20
20	50	.25
20	450	.60
24	350	.50
8	600	.50
8	150	.15
10	150	.20
10	50	.15
4	50	.10
4	150	.14



ELECTROLYTICS Prong Mount D Type

150 ea.—10 for $1.75

Mfd	Volt
40	150
10	150
10	200
8	450
16	450
20-20	150
10-10	150
20-20	150
40-40	150
20-30	250
8x20	450
40	250
50	350
50	450
10	450
15	450
30-30	25
20-10	150
40-20	150
50-50	150
20-1	350
10-1	500

29¢ ea.—10 for $2.75

6	600
50	400
40	450
50-20	150
50-50	150
20-20	350-25
20-20	400-25
40-20-10	150
40-30-20	150-25
50-30-20	150-25
60-40-10	150-25
60	500
30	450
32	450
50-30	150
70-30	150
30-20	350-25
10-10	450
40-20-20	150
40-30-20	150
5x50	150
60-10-100	150-10

Ceramicons

Mmf	
1	.25
3	.25
3.4	.35
4	.35
5	.47
6	.50
7	.55
8.5	.55
11	.60
15	.62
20	.67
24	.70
75	.220
115	.240
125	.240
150	.250
180	1.900
200	$7.50 per 100
100	.60

Button	Feed Thru
40-100	.50
150-200	.50
175-500	.470
185-105	.60

$5.50 per 100 C

OIL CONDENSERS FAMOUS MAKES BRAND NEW

Mfd	Volt	Price
12	250AC	$2.20
3.5	600	.50
7	600	.65
1	750AC	1.69
7	800	1.20
.5	1K	.69
1.5	1K	.75
2	1K	.99
4	1K	.98
.25	1.5K	1.85
1	1.5K	.95
1.5	1.5K	.95
2	1.5K	1.85
6	1.5K	2.25
1	2K	.98
1	2.5K	1.20
.25	4K	2.95
1.1	4.5K	2.95
1	5K	2.95
1	6K	2.79
15-15	6K	3.95
.5	6K	9.75
1.1	7K	3.59
1	7.5K	2.95
1	7.5K	12.95
15-15	8K	4.95
1	10K	14.95
.0016	15K	7.95
1	15K	30.95
.015	16K	6.95
.25	20K	16.95
.5	25K	36.95
.25	25K	83.95
1	50	.29
1	100	.15
2.5	100	.23

200VDC

2x1	8ST	.15
2x1	8TT	.15
2x1	4ST	.16
2	2ST	.20
5	2TT	.15
5	4ST	1" .15
5	2ST	.15

400VDC

2x.25	8ST	.21
2x1	8ST	.21
2x1	4TT	.22
3x1.5	8ST	.25
1	2TT	.19
.5	2ST	.15
1	2ST	.23

600VDC

1	2HT	.20
1	2ST	.21
2x1	8ST	.27
2x1	3HT	.25
2x1	2ST	.26
2x1	4ST	.25
2x.25	8ST	.23
.25	2ST	.20
1	2ST	.30

1000VDC

1	2ST	.45

MANY OTHERS

RECTIFIER CAPACITORS

Mfd	Volt	Price
6000	12	$2.75
1000	15	.90
3000	15	1.95
2x500	15	1.75
500	25	.95
500	25	.95
100	30	.70
1000	35	1.39
500	35	1.49
2000	25	1.59
3x250	50	2.25
500	50	1.40
125	150	.60
250	150	1.69
2x1000	6	1.10
75	250	.75

Wholesale Otys Available

110 volt AC CONDENSERS

Mfd	Price
20-24	1.00
26-30	1.00
31-37	1.00
38-42	1.00
43-48	1.00
45-65	1.25
50-75	1.25
72-87	1.25
86-96	1.50
88-106	1.50
107-129	1.75
124-138	1.75
130-150	1.75
130-150	1.90
161-180	1.75
158-191	2.00

MANY OTHERS

RL 26 REEL UNIT

Gasoline driven wire laying & pick up unit. Reversible Engine. Many uses. Like new.
Sig. Dev. $250.00

RL 9 or RL 7

Interphone Amplifier Control Unit. Has 6 tubes. Push-to-talk. Hand Mike. Panel Mounting. Amp. Compl. w. 12AU7, 2 Choke, VP23MR, DYN. for 24V operation.
$2.75

CABLE CLAMPS

Use on RG-8/U, RG-9/U, RG-11/U, RG-17/U, RG-18/U, RG-19/U, RG-20/U, RG-21/U, RG-22/U, RG-34/U, RG-35/U, RG-36/U, RG-37/U, RG-38/U, RG-39/U, RG-40/U, RG-41/U, RG-42/U, RG-43/U, RG-44/U, RG-45/U, RG-46/U, RG-47/U, RG-48/U, RG-49/U, RG-50/U, RG-51/U, RG-52/U, RG-53/U, RG-54/U, RG-55/U, RG-56/U, RG-57/U, RG-58/U, RG-59/U, RG-60/U, RG-61/U, RG-62/U, RG-63/U, RG-64/U, RG-65/U, RG-66/U, RG-67/U, RG-68/U, RG-69/U, RG-70/U, RG-71/U, RG-72/U, RG-73/U, RG-74/U, RG-75/U, RG-76/U, RG-77/U, RG-78/U, RG-79/U, RG-80/U, RG-81/U, RG-82/U, RG-83/U, RG-84/U, RG-85/U, RG-86/U, RG-87/U, RG-88/U, RG-89/U, RG-90/U, RG-91/U, RG-92/U, RG-93/U, RG-94/U, RG-95/U, RG-96/U, RG-97/U, RG-98/U, RG-99/U, RG-100/U, RG-101/U, RG-102/U, RG-103/U, RG-104/U, RG-105/U, RG-106/U, RG-107/U, RG-108/U, RG-109/U, RG-110/U, RG-111/U, RG-112/U, RG-113/U, RG-114/U, RG-115/U, RG-116/U, RG-117/U, RG-118/U, RG-119/U, RG-120/U, RG-121/U, RG-122/U, RG-123/U, RG-124/U, RG-125/U, RG-126/U, RG-127/U, RG-128/U, RG-129/U, RG-130/U, RG-131/U, RG-132/U, RG-133/U, RG-134/U, RG-135/U, RG-136/U, RG-137/U, RG-138/U, RG-139/U, RG-140/U, RG-141/U, RG-142/U, RG-143/U, RG-144/U, RG-145/U, RG-146/U, RG-147/U, RG-148/U, RG-149/U, RG-150/U, RG-151/U, RG-152/U, RG-153/U, RG-154/U, RG-155/U, RG-156/U, RG-157/U, RG-158/U, RG-159/U, RG-160/U, RG-161/U, RG-162/U, RG-163/U, RG-164/U, RG-165/U, RG-166/U, RG-167/U, RG-168/U, RG-169/U, RG-170/U, RG-171/U, RG-172/U, RG-173/U, RG-174/U, RG-175/U, RG-176/U, RG-177/U, RG-178/U, RG-179/U, RG-180/U, RG-181/U, RG-182/U, RG-183/U, RG-184/U, RG-185/U, RG-186/U, RG-187/U, RG-188/U, RG-189/U, RG-190/U, RG-191/U, RG-192/U, RG-193/U, RG-194/U, RG-195/U, RG-196/U, RG-197/U, RG-198/U, RG-199/U, RG-200/U, RG-201/U, RG-202/U, RG-203/U, RG-204/U, RG-205/U, RG-206/U, RG-207/U, RG-208/U, RG-209/U, RG-210/U, RG-211/U, RG-212/U, RG-213/U, RG-214/U, RG-215/U, RG-216/U, RG-217/U, RG-218/U, RG-219/U, RG-220/U, RG-221/U, RG-222/U, RG-223/U, RG-224/U, RG-225/U, RG-226/U, RG-227/U, RG-228/U, RG-229/U, RG-230/U, RG-231/U, RG-232/U, RG-233/U, RG-234/U, RG-235/U, RG-236/U, RG-237/U, RG-238/U, RG-239/U, RG-240/U, RG-241/U, RG-242/U, RG-243/U, RG-244/U, RG-245/U, RG-246/U, RG-247/U, RG-248/U, RG-249/U, RG-250/U, RG-251/U, RG-252/U, RG-253/U, RG-254/U, RG-255/U, RG-256/U, RG-257/U, RG-258/U, RG-259/U, RG-260/U, RG-261/U, RG-262/U, RG-263/U, RG-264/U, RG-265/U, RG-266/U, RG-267/U, RG-268/U, RG-269/U, RG-270/U, RG-271/U, RG-272/U, RG-273/U, RG-274/U, RG-275/U, RG-276/U, RG-277/U, RG-278/U, RG-279/U, RG-280/U, RG-281/U, RG-282/U, RG-283/U, RG-284/U, RG-285/U, RG-286/U, RG-287/U, RG-288/U, RG-289/U, RG-290/U, RG-291/U, RG-292/U, RG-293/U, RG-294/U, RG-295/U, RG-296/U, RG-297/U, RG-298/U, RG-299/U, RG-300/U, RG-301/U, RG-302/U, RG-303/U, RG-304/U, RG-305/U, RG-306/U, RG-307/U, RG-308/U, RG-309/U, RG-310/U, RG-311/U, RG-312/U, RG-313/U, RG-314/U, RG-315/U, RG-316/U, RG-317/U, RG-318/U, RG-319/U, RG-320/U, RG-321/U, RG-322/U, RG-323/U, RG-324/U, RG-325/U, RG-326/U, RG-327/U, RG-328/U, RG-329/U, RG-330/U, RG-331/U, RG-332/U, RG-333/U, RG-334/U, RG-335/U, RG-336/U, RG-337/U, RG-338/U, RG-339/U, RG-340/U, RG-341/U, RG-342/U, RG-343/U, RG-344/U, RG-345/U, RG-346/U, RG-347/U, RG-348/U, RG-349/U, RG-350/U, RG-351/U, RG-352/U, RG-353/U, RG-354/U, RG-355/U, RG-356/U, RG-357/U, RG-358/U, RG-359/U, RG-360/U, RG-361/U, RG-362/U, RG-363/U, RG-364/U, RG-365/U, RG-366/U, RG-367/U, RG-368/U, RG-369/U, RG-370/U, RG-371/U, RG-372/U, RG-373/U, RG-374/U, RG-375/U, RG-376/U, RG-377/U, RG-378/U, RG-379/U, RG-380/U, RG-381/U, RG-382/U, RG-383/U, RG-384/U, RG-385/U, RG-386/U, RG-387/U, RG-388/U, RG-389/U, RG-390/U, RG-391/U, RG-392/U, RG-393/U, RG-394/U, RG-395/U, RG-396/U, RG-397/U, RG-398/U, RG-399/U, RG-400/U, RG-401/U, RG-402/U, RG-403/U, RG-404/U, RG-405/U, RG-406/U, RG-407/U, RG-408/U, RG-409/U, RG-410/U, RG-411/U, RG-412/U, RG-413/U, RG-414/U, RG-415/U, RG-416/U, RG-417/U, RG-418/U, RG-419/U, RG-420/U, RG-421/U, RG-422/U, RG-423/U, RG-424/U, RG-425/U, RG-426/U, RG-427/U, RG-428/U, RG-429/U, RG-430/U, RG-431/U, RG-432/U, RG-433/U, RG-434/U, RG-435/U, RG-436/U, RG-437/U, RG-438/U, RG-439/U, RG-440/U, RG-441/U, RG-442/U, RG-443/U, RG-444/U, RG-445/U, RG-446/U, RG-447/U, RG-448/U, RG-449/U, RG-450/U, RG-451/U, RG-452/U, RG-453/U, RG-454/U, RG-455/U, RG-456/U, RG-457/U, RG-458/U, RG-459/U, RG-460/U, RG-461/U, RG-462/U, RG-463/U, RG-464/U, RG-465/U, RG-466/U, RG-467/U, RG-468/U, RG-469/U, RG-470/U, RG-471/U, RG-472/U, RG-473/U, RG-474/U, RG-475/U, RG-476/U, RG-477/U, RG-478/U, RG-479/U, RG-480/U, RG-481/U, RG-482/U, RG-483/U, RG-484/U, RG-485/U, RG-486/U, RG-487/U, RG-488/U, RG-489/U, RG-490/U, RG-491/U, RG-492/U, RG-493/U, RG-494/U, RG-495/U, RG-496/U, RG-497/U, RG-498/U, RG-499/U, RG-500/U, RG-501/U, RG-502/U, RG-503/U, RG-504/U, RG-505/U, RG-506/U, RG-507/U, RG-508/U, RG-509/U, RG-510/U, RG-511/U, RG-512/U, RG-513/U, RG-514/U, RG-515/U, RG-516/U, RG-517/U, RG-518/U, RG-519/U, RG-520/U, RG-521/U, RG-522/U, RG-523/U, RG-524/U, RG-525/U, RG-526/U, RG-527/U, RG-528/U, RG-529/U, RG-530/U, RG-531/U, RG-532/U, RG-533/U, RG-534/U, RG-535/U, RG-536/U, RG-537/U, RG-538/U, RG-539/U, RG-540/U, RG-541/U, RG-542/U, RG-543/U, RG-544/U, RG-545/U, RG-546/U, RG-547/U, RG-548/U, RG-549/U, RG-550/U, RG-551/U, RG-552/U, RG-553/U, RG-554/U, RG-555/U, RG-556/U, RG-557/U, RG-558/U, RG-559/U, RG-560/U, RG-561/U, RG-562/U, RG-563/U, RG-564/U, RG-565/U, RG-566/U, RG-567/U, RG-568/U, RG-569/U, RG-570/U, RG-571/U, RG-572/U, RG-573/U, RG-574/U, RG-575/U, RG-576/U, RG-577/U, RG-578/U, RG-579/U, RG-580/U, RG-581/U, RG-582/U, RG-583/U, RG-584/U, RG-585/U, RG-586/U, RG-587/U, RG-588/U, RG-589/U, RG-590/U, RG-591/U, RG-592/U, RG-593/U, RG-594/U, RG-595/U, RG-596/U, RG-597/U, RG-598/U, RG-599/U, RG-600/U, RG-601/U, RG-602/U, RG-603/U, RG-604/U, RG-605/U, RG-606/U, RG-607/U, RG-608/U, RG-609/U, RG-610/U, RG-611/U, RG-612/U, RG-613/U, RG-614/U, RG-615/U, RG-616/U, RG-617/U, RG-618/U, RG-619/U, RG-620/U, RG-621/U, RG-622/U, RG-623/U, RG-624/U, RG-625/U, RG-626/U, RG-627/U, RG-628/U, RG-629/U, RG-630/U, RG-631/U, RG-632/U, RG-633/U, RG-634/U, RG-635/U, RG-636/U, RG-637/U, RG-638/U, RG-639/U, RG-640/U, RG-641/U, RG-642/U, RG-643/U, RG-644/U, RG-645/U, RG-646/U, RG-647/U, RG-648/U, RG-649/U, RG-650/U, RG-651/U, RG-652/U, RG-653/U, RG-654/U, RG-655/U, RG-656/U, RG-657/U, RG-658/U, RG-659/U, RG-660/U, RG-661/U, RG-662/U, RG-663/U, RG-664/U, RG-665/U, RG-666/U, RG-667/U, RG-668/U, RG-669/U, RG-670/U, RG-671/U, RG-672/U, RG-673/U, RG-674/U, RG-675/U, RG-676/U, RG-677/U, RG-678/U, RG-679/U, RG-680/U, RG-681/U, RG-682/U, RG-683/U, RG-684/U, RG-685/U, RG-686/U, RG-687/U, RG-688/U, RG-689/U, RG-690/U, RG-691/U, RG-692/U, RG-693/U, RG-694/U, RG-695/U, RG-696/U, RG-697/U, RG-698/U, RG-699/U, RG-700/U, RG-701/U, RG-702/U, RG-703/U, RG-704/U, RG-705/U, RG-706/U, RG-707/U, RG-708/U, RG-709/U, RG-710/U, RG-711/U, RG-712/U, RG-713/U, RG-714/U, RG-715/U, RG-716/U, RG-717/U, RG-718/U, RG-719/U, RG-720/U, RG-721/U, RG-722/U, RG-723/U, RG-724/U, RG-725/U, RG-726/U, RG-727/U, RG-728/U, RG-729/U, RG-730/U, RG-731/U, RG-732/U, RG-733/U, RG-734/U, RG-735/U, RG-736/U, RG-737/U, RG-738/U, RG-739/U, RG-740/U, RG-741/U, RG-742/U, RG-743/U, RG-744/U, RG-745/U, RG-746/U, RG-747/U, RG-748/U, RG-749/U, RG-750/U, RG-751/U, RG-752/U, RG-753/U, RG-754/U, RG-755/U, RG-756/U, RG-757/U, RG-758/U, RG-759/U, RG-760/U, RG-761/U, RG-762/U, RG-763/U, RG-764/U, RG-765/U, RG-766/U, RG-767/U, RG-768/U, RG-769/U, RG-770/U, RG-771/U, RG-772/U, RG-773/U, RG-774/U, RG-775/U, RG-776/U, RG-777/U, RG-778/U, RG-779/U, RG-780/U, RG-781/U, RG-782/U, RG-783/U, RG-784/U, RG-785/U, RG-786/U, RG-787/U, RG-788/U, RG-789/U, RG-790/U, RG-791/U, RG-792/U, RG-793/U, RG-794/U, RG-795/U, RG-796/U, RG-797/U, RG-798/U, RG-799/U, RG-800/U, RG-801/U, RG-802/U, RG-803/U, RG-804/U, RG-805/U, RG-806/U, RG-807/U, RG-808/U, RG-809/U, RG-810/U, RG-811/U, RG-812/U, RG-813/U, RG-814/U, RG-815/U, RG-816/U, RG-817/U, RG-818/U, RG-819/U, RG-820/U, RG-821/U, RG-822/U, RG-823/U, RG-824/U, RG-825/U, RG-826/U, RG-827/U, RG-828/U, RG-829/U, RG-830/U, RG-831/U, RG-832/U, RG-833/U, RG-834/U, RG-835/U, RG-836/U, RG-837/U, RG-838/U, RG-839/U, RG-840/U, RG-841/U, RG-842/U, RG-843/U, RG-844/U, RG-845/U, RG-846/U, RG-847/U, RG-848/U, RG-849/U, RG-850/U, RG-851/U, RG-852/U, RG-853/U, RG-854/U, RG-855/U, RG-856/U, RG-857/U, RG-858/U, RG-859/U, RG-860/U, RG-861/U, RG-862/U, RG-863/U, RG-864/U, RG-865/U, RG-866/U, RG-867/U, RG-868/U, RG-869/U, RG-870/U, RG-871/U, RG-872/U, RG-873/U, RG-874/U, RG-875/U, RG-876/U, RG-877/U, RG-878/U, RG-879/U, RG-880/U, RG-881/U, RG-882/U, RG-883/U, RG-884/U, RG-885/U, RG-886/U, RG-887/U, RG-888/U, RG-889/U, RG-890/U, RG-891/U, RG-892/U, RG-893/U, RG-894/U, RG-895/U, RG-896/U, RG-897/U, RG-898/U, RG-899/U, RG-900/U, RG-901/U, RG-902/U, RG-903/U, RG-904/U, RG-905/U, RG-906/U, RG-907/U, RG-908/U, RG-909/U, RG-910/U, RG-911/U, RG-912/U, RG-913/U, RG-914/U, RG-915/U, RG-916/U, RG-917/U, RG-918/U, RG-919/U, RG-920/U, RG-921/U, RG-922/U, RG-923/U, RG-924/U, RG-925/U, RG-926/U, RG-927/U, RG-928/U, RG-929/U, RG-930/U, RG-931/U, RG-932/U, RG-933/U, RG-934/U, RG-935/U, RG-936/U, RG-937/U, RG-938/U, RG-939/U, RG-940/U, RG-941/U, RG-942/U, RG-943/U, RG-944/U, RG-945/U, RG-946/U, RG-947/U, RG-948/U, RG-949/U, RG-950/U, RG-951/U, RG-952/U, RG-953/U, RG-954/U, RG-955/U, RG-956/U, RG-957/U, RG-958/U, RG-959/U, RG-960/U, RG-961/U, RG-962/U, RG-963/U, RG-964/U, RG-965/U, RG-966/U, RG-967/U, RG-968/U, RG-969/U, RG-970/U, RG-971/U, RG-972/U, RG-973/U, RG-974/U, RG-975/U, RG-976/U, RG-977/U, RG-978/U, RG-979/U, RG-980/U, RG-981/U, RG-982/U, RG-983/U, RG-984/U, RG-985/U, RG-986/U, RG-987/U, RG-988/U, RG-989/U, RG-990/U, RG-991/U, RG-992/U, RG-993/U, RG-994/U, RG-995/U, RG-996/U, RG-997/U, RG-998/U, RG-999/U, RG-1000/U

RADIART MALLORY OAK VIBRATORS IN STOCK 12, 28, 32V.

MOUNTINGS

FT-231A For 2.5" Trans
FT-232A For 3" Trans
FT-229A For 2.5" Trans
FT-230A For 3" Trans
MT-62 For ARC-5, ARB2
MT-85 ARC-5 Junction Box
MT-85 ARC-5 Junction Box
FT-141 69x44's
MT-80 ARC-5 Junction Box
FT-282A For SCR 518A
FT-283A For SCR 522
MT-115A SAB
FT-340 For SCR 540
FT-341 For SCR 542
MT-115A SAB
MT-5 ARB2 RA-ARB2
MT-5 ARB2 RA-ARB4
Write for Many others

BC605 Interphone Amplifier

Easily converted to an ideal tower communication unit set for office-home-car factory.
Brand New **$4.75**

Heineman Ckt Bkrs. For AC DC Operation. Amperes .010, .3, .7, .50, .80, 100, 150 Ea. $1.45 Dual $2.45

UHF ANTENNA

12" Dipole ANT-ARB2 Complete Chassis Band Tuned Tweeter & Mono & Tubes Less Tubes $9.95

BC433 Mod or tuned CW Receiver 200-1750KC 6 Tubes 110V AC/DC Less Tubes As Is $14.95

10R APN4 Scope 5" Less Tubes Full of Basic Stock Basic Assy for Scope As Is, Less Tubes $9.95

BC433 Mod or tuned CW Receiver 200-1750KC 6 Tubes 110V AC/DC Less Tubes As Is $14.95

10R APN4 Scope 5" Less Tubes Full of Basic Stock Basic Assy for Scope As Is, Less Tubes $9.95

BC433 Mod or tuned CW Receiver 200-1750KC 6 Tubes 110V AC/DC Less Tubes As Is $14.95

BC429 ARRL Scope In Factory Assembled Set Switch & Motor & Tubes 2-6H6GT, 2-6SN7 In Metal Case, 6x6x10" Deep Price $25.95

APN4 New $25.95

BC 429 RECEIVER

High sensitivity 3 gang T.R.F. Complete with tone and tuning meter. Operates on 6 volts DC and 2500 volts DC. Tubes: An ideal marine receiver for small boats and yachts. Now $3.95
Extra tuning unit ..... $.95

BC434 CONTROL BOX

Remote Control for 433 Radio Compass containing S-Meter, Dial Control $3.95

TVI Line Filter 110VAC

5 Amp Rated Range 15-150 MC Chassis MC Hermetically Sealed 1¼x 1¼x 2½" Price 69c

GPI Aircraft XMTTR Used Condition, As Is, Less T-R $17.50

Avail. In Stock Dual XMTTR & Dual Rec. Triple Rack Mounted. MT-9A MT-10A MT-11 Sheet & Ringed Tx. Sold As Is. No Re-Turn. Repairable $1.00

6 VOLT RELAY PANELS

Comes complete with relays mounted on bakelite panel. Contacts rated at 10 amps. Relays are SPST, SPDT, DPST & DPDT Make
H $5.49



0-5 Ma & 0-5 V Scale w-10V Movement 2" Metal Case Readrite Meter 90¢ ea. 10 for 9.00

HEADSETS

Dynamic M-Sc and Headset Combination. A high quality unit. Ideal for use in Mono and stereo recorders.
..... $3.75

Headset ..... $4.00 M

RADIOSONDE TRANSMIT TERS 7.40 AMS ..... $3.75 ea.

TRANSFORMERS for Command Set, ART13 Transmitter, Cat. #T47200, OR #T472

AUDIO XFRMRS

SUB OUNCER SPECIAL — Multi match, mike to grid, plate to grid, plate to line, etc. Ideal for transistors. 20Ω split to 150000 ohm CT. 100000 ohm split to 200000 ohm. Level +4 V.U. Size 1¾" Cat. #6707 ..... 69c

Cat. #6707 ..... 69c

Cat. #6707 ..... 69c

AMPLIFIERS
AN CONNECTORS
CABLE
CAPACITORS
CHOKES
CIRCUIT BREAKERS
COAX CONNECTORS
COILS
CORDS
CRYSTALS
DELAY LINES
FILTERS
FUSES

Voltage Stabilizer VR3

55-130V 2.4A 60Cy In. Out. 115V 120 Watt 100%. Mfg. Raytheon w-ert Bx flux. Sockets & cable used but good $19.95

Voltage Regulator VH623

95-130V 1.76A 60 Cy In. CU 115V 150 Watt 100%. Slightly used; excellent $19.95

Antenna Switch

DPDT Size 8x4x2" **Price $1.95**

Control Box BC-451 89¢

Telegraph key, 2 mike jacks, 1 position selector switch, and numerous other parts.

SPECIAL COMBINATION TRANSFORMERS

STC-627 230V IN; 1500-160-115V, 200 2.5V, 200, 5V 10-2.5A, 10 ..... $5.95
STC-611 230V IN, 200V 200, 4 x 6.3V, 8 ..... 2.95
STC-15A 225V IN, 200V, 90-200VCT, 6.3V 4A 2.95
STC-607 225V IN, 700VCT-75MA, 40VCT-100, 15/10/5V-300MA 3.95
STC-612 230V IN, 400V-90, 350-0-350, 2 x 5V-2.5 6.3-6A, 6.3 ..... 3.95
STC-622 225V IN, 250V-100, 2 x 5V 2.0-2.4Hg. Sockets 4.25
STC-047 230V IN, 700V-90MA, 350-90MA, 24V-90MA, 2 x 6.3 x 2.5A, 5V-3A, 2.5-3A 4.95
STC-281 225-24 IN, Inverter X-mtr, 420VCT/50, 6.3V/2.5A, 6.3 ..... 2.39

COMBINATION TRANSFORMERS 115V 60 CY.

CT-561	2100VCT	175	2.5VCT 4A, 2.5V 10A	$7.29
CT-1A	640VCT	060	5V 2.2, 6.3VCT 1.2A	4.25
CT-825	360VCT	340	6.3VCT 3.6, 6.3VCT 3A	3.95
CT-076	600V	100	2 x 12.6V 1	1.95
CT-626	1500V	160	2.5 12, 30, 100	9.95
CT-15A	350VCT	070	6.3, 6.0, 5 1.8, 3 lbs.	2.95
CT-071	110V	200	33, 200, 5V 10, 2.5 10	4.95
CT-378	2500V	450	5V 3A	6.95
CT-367	380VCT	030	5VCT 3A	2.25
CT-721	350VCT	100	6.3 1, 2.5VCT 2	2.95
CT-99A	2x110VCT	100	6.3 1A, 2.5VCT 7A	3.25
CT-91A	350V	100	5V 3A, 6.3 3.5	3.25
CT-080	700VCT	205	5V 3, 5V 2A	3.95
CT-328	115V	2.2	40V 2.2A, 115V 2.2A	4.49
CT-441	450V	240	5V 2A, 5V 1.2	2.29
CT-408	350VCT	026MA	5V 3A	2.75
CT-268	1100VCT	250MA	6.3V 1.6, 400 V-Bias	6.95
CT-931	385VCT	060	5V 3A, 6.3V 6A	4.25
CT-610	700VCT	090MA	5V 2A, 2.5V 1.75A	4.95
CT-137	350VCT	026MA	5V 3A	2.75
CT-866	330V	065	6.3V 1.2, 6.3V 600MA	1.75
CT-525	330VCT	055	6.3 2, 6.3 3A	3.25
CT-526	510VCT	025	12.5-900MA, 6.3 3A	1.95

SPECIAL COMBINATION TRANSFORMERS

STF-846 115-220 in, 2.5V-4A, 2.5V-4A, 2.5V-4A, 2.5V-4A, 220 ..... $1.29
STF-443 220-440 in, 2.5V-4A, 2.5V-4A, 2.5V-4A, 2.5V-4A, 220 ..... 1.95
STF-638 230 in, 2.5V-8A, 2.5V-8A, 2.5V-8A, 2.5V-8A, 220 ..... 1.25
STF-05A 110-220 in, 2.5V-7, 5V-7, 6.3V-7, 6.3V-7, 220 ..... 4.25
STF-682 220 in, 2.5V-1.75A, 2.5V-1.75A, 220 ..... .69
STF-968 220 in, 2.5V-0.5A 1.10
STF-406 220-115 in, 5V-12.0A 2.95
STF-370 220-440 in, 2 x 2.5V-7A, 2.5V-15A, 5V-4, 4 x 6.3V-1.5A 5.25
STF-619 110-220 in, 6.3V-10A, 6.3V-10A, 6.3V-10A, 6.3V-10A 19.95
STF-11A 220 in, 2.5V-40A, 5V-7A, 5V-15A, 12.6-3A 2.95
STF-631 230 in, 2.5V-27A, 2.5V-3A, 105-111-115-117-120 ..... 24.95
STF-968 220 in, 2.5-0.5A 1.95
STF-608 220 in, 24V-800-5V-3A, 2 x 6.3V-1A 2.25
STF-45A 115-230 in, 2 x 2.5-0.5, 6.3V-1 Fan 3.25
STF-306 105-120 in, 5VCT 10 amp, 20,000 VT 12.95

SPECIAL PLATE TRANSFORMERS

STP-945 2100VCT, 1.5A, 2.5V-10A, 5V-3A $5.95
STP-444 230-460 in, 230-105-115-125-135 in, 2.5V x 6 x 6 ..... 14.95
STP-611 115V in, 2 x 220/45 ..... 1.29
STP-823 115V in, 222VCT-.006 MA 2.95
STP-780 +2V in, 1400V-.002 ..... 1.29
STP-08B 105 in, 2 x 750V, 1 MA ..... .98
STP-311 105-120 in, 50 VCT, 1 Amp ..... .59

CHOKES

CH-332 5-10 HY-2A $3.25
CH-090 7 HY 150 MA 1.29
CH-388 10 HY 1.2 MA ..... .79
CH-779 6 HY 150 MA ..... .69
CH-866 10-20 HY 300 MA, 5 HY 250 MA, 5 HY 225 MA 1.10
CH-317 Dual 5-5 HY 85 MA 1.95
CH-710 50 HY 190 MA 29.00
CH-614 .012 HY 10 MA ..... .69
CH-510 4 HY 1 MA ..... .49
CH-507 7 HY 150 MA ..... .69
CH-25A Swing 5-10 HY 4.49
CH-921 7 HY 300 MA, 12 HY 167 MA 12.49
CH-994 Dual 5-10 HY 167 MA 5.95
CH-961 Dual 12 HY 300 MA, 44HY 100 MA 3.95
CH-321 5 HY 300 MA, 10 HY 0 MA 2.95
CH-930 Swing 5-20 HY 300 MA 14.95
CH-791 5-7 HY 100 Ma ..... .59
CH-917 10 HY 450 MA 12.45
Special 12 HY 150 MA 3.75

CHOKE SWINGING

9-50 Hy 100-.05 MA. 1000 volt test. Mfg. Super Elect. $7.95

066 Filament Xfrmr 2x2.5v 6 Amp 8000 V Test Size Approx 3½" SQ. Easy to Mount. Price $2.95

Modulation Xfrmr Class B Single 211 w/PP 211s 9000 Ct Pl to Pl Imp. 7000 Ct can be used for 804 or 811 final ..... $1.49 ea.

Gen. Purpose —Many uses 24 volt chime xfrmr. Pri: 110 V 60 Cy Sec: 24V 1A $1.69

Spec. Xfrmr 110V 60 Cy Sec: 36V 3.5 amp for cycle $2.75

WHIP ANTENNA

MS49 & MS50 for Mobile or Dipole 74" ..... 49c Set

FLUORESCENT LIGHT TESTER

Dam Model #3, single or dual Fluor. Light Tester for 4 or 6 watt 50-120-200-400 cycle equip.

Each $35.00

T.V. Transformer, 7" or 9" scope. 1000- 5MA, 720ct 200MA, 6.4 6.7A, 6.4 6A, 5.3A 1.25/3A, 115V 60 cy input. Price $3.95

PROJECTION LAMPS
RECORDERS
RESISTORS
SELSYNS
SCOPE ACCES
SHOCK MOUNTS
SOCKETS
SWITCHES

866 XMITTERS VFO DRIVERS

40 Watts Output 3—4 Mc $6.95

Used Fair Cond.

TUNING UNITS FOR BC 191

TU 5— 1500 to 3000 KC $2.95
TU 6— 3000 to 4500 KC 2.95
TU 7— 4500 to 6200 KC 2.95
TU 8— 6200 to 7700 KC 2.95
TU 9— 7700 to 10000 KC 2.49
TU 26— 200 to 500 KC 2.95

Trimmer Cond. Variable

15 MMF
5 MMF
20 MMF
40 MMF
50 MMF
60 MMF

21¢ ea.

GIBSON GIRL

The Emergency Radio Transmitter. Sends S O S any-where automatically on 500KC 150-mile range. No batteries required. Has hand-driven generator, tubes, wire. New. It's only $3.49

SILVER-COATED WIRE ON PYREX GLASS FORM

A beautiful 1n diameter—12 turns per 1". Silver coated wire on a 2½" dia. Pyrex form with bakelite end strip. Another fine industrial item by BRAND NEW original sealed carton. 986 ea.

ARR2 HOMING REC.

Tunes 234-258 Mc
Uses 4-6AK5, 6-300Ω, 1—12AU7
Ideal for 2-0-10 Meter Conv. Less Dyn. & Tubes. As is fair $4.95

DYNA-MOTORS AT SURPLUS PRICES

Type	Input Volts	Input Amps.	Output Volts	Output Amps.	Radio Set
PE86	28	1.25	250	060	RC 36
DM416	14	6.2	300	120	RT 19
DY-2 ARR-2	28	1.1	250	060	ARC-5
DM38	28	1.4	220	080	SCR 508
DM25	12	2.3	250	050	BC 367
	28	1.25	275	.070	BC 348
DM31A	28	7	540	250	BC 456
DM42	14	46	515	110	SCR 506
			1030	050	
			2.5		
PE10C	13-26	12.6	400	135	SCR 515
		6.3	800	020	
BD AR 93	28	3.25	375	150	
23350	27	1.75	285	075	APN-1
35CO45B	28	1.2	250	060	
ZA-065	12-24	4.2	500	050	
ZA-056	12-24	5.4	12-275	3/110	
B-19 p ck	12	9.4	275	110	Mark II
			500	050	
D-104	12		225	100	
D-104	12	12	225	100	
			440	200	
DA-3A	28	10	300	060	SCR 522
			150	010	
			14 5		
/5053	28	1.4	250	060	APN-1
PE 73CM	28	19	1000	350	BC 375
DM21	14	3.5	235	090	BC 312
CW21AAX	13	12.0	400	135	
	26	6.3	800	020	
			9	1.12	
BD 77KM	14	40	1000	350	MC 191
PE 94	28	10	300	200	SCR
OTHERS			150	010	522
			14 5	5	

HANDSETS
INVERTERS
JACKS
KLYSTRONS
KNOBS
MAGNETRONS
MAGNETS
MICROPHONES
METERS
MOTORS
POTENTIOMETERS
POWER PLANTS
POWER SUPPLIES

There Are No Shortages of Equipment at C.E.C.

Our warehouses are full of surplus radio, radar, electronic equipment, for your needs, as a manufacturer, jobber, amateur, experimenter, engineer, everything at surplus prices. We own what we sell, phone or write us your needs and let us quote.

Mr. Chas. Rosen
Digby 9-4125

AMPHENOL "AN" CONNECTORS

AN3100	14S-2P	10SL-4S
12S-3P	14S-2S	12-8S
12S-4S	14S-4S	12S-8P
14S-4S	14S-5P	12S-8S
16S-1P	16S-1P	14S-1P
16S-4S	16S-3P	14S-2P
16S-5P	16S-4P	14S-2S
16S-6S	18-3P	14S-5P
18-1P	18-4P	14S-8S
18-4P	18-8S	14S-9P
18-16S	18-16S	16S-1P
20-1P	20-1P	16S-1S
20-1S	20-4P	16S-4S
20-4P	20-4S	16S-6S
20-5P	20-5S	18-1P
20-5S	22-4P	18-4S
20-14S	22-4S	18-8S
22-6P	22-5S	18-8S
24-3P	22-10S	18-8S
24-4P	22-11P	18-11S
24-9S	24-1P	18-16P
28-1P	24-4P	18-20S
28-2P	24-9P	20-4S
28-2S	24-12P	20-8P
28-7P	24-18SP	20-5S
28-7S	24-9S	20-13S
32-5S	28-1P	20-27S
32-6P	28-2P	22-1S
32-16P	28-2S	22-4P
36-1P	28-4P	22-5P
36-2S	28-4S	22-9P
36-5S	28-6P	22-9S
36-6S	28-7P	22-10P
44-1P	28-7S	22-10S
AN3102	AN3106	
10SL-3P	8S-1P	

Hundreds of Other Numbers

WRITE OR PHONE YOUR NEEDS

LARGE VARIETY AVAILABLE AT GREAT SAVINGS

Birtcher Tube Clamps

926-C
926-16
926-B1
926-B2
926-B8
926-C-15
926-C-13
926-C-19
926-B16
926A-14
926C-1
926A11
926-B31 Each 15c
926C-23
929-1 10 $1.40
926B-10
926B-18 100
926-K2 $12.00

R5 ARN 7 Compass Rec.

ADF Rec. 100 to 1750 KC. in 4 Band 5-Gang Tuning Capacitor w-15 Tubes.

FREQ. MULT. UNIT ART 13 XMITTR ASSY



2 to 18 Mc. Doubling Package set up for two 1625 Tubes No Coils. Complete Less Tubes w-cbl dia.

Price $10

BC-733D SUPERHET RECEIVER

w/10 Tubes. 6—Selector. Relays operate on Xtal Controlled Freq. 108-3-110.3 MC. Can easily be converted to 2 Mtr. ham bands.

WRITE OR PHONE FOR PRICE

BC-659 Mobile FM TRANSCEIVER — P.O. SCR-610. Includes 10 meter band. Excellent condition with tubes. PE-120 Power Supply—Less vibrator Tubes and Cord.

PE 157 VIBROPACK FOR BC 745

Runs on 2V DC. Obtained from small Willard Rechargeable batteries contained in case which is charged from 6 Vac or DC. Also contains 5" PM Speaker & Jacks for Mike Hdsets. Used, excellent $9.95

NAVY TRANSMITTER TYPE GP 7

Rated at over 125 watts, designed to cover from 350 to 9050 kc. with plug-in tuning units; one of the few transmitters on surplus market built of standard parts, making it a very unusual buy. Limited quantities. Transmitter, tubes, less tuning unit—as is.

Only $17.50

CARBON PILE VOLTAGE REGULATORS

Contract #NOAS-858 Bendix Aviation. MERS Drawing 111144 w/mnt & pot. Ser. 2Y319

Type A 105-115 amps 95-45° C. Ser. 26VK 809-11. Reg. Volt. 83 Volts. Leland Electric Mark 1. Resis. in enclosed base. Ser. 30463-123801, Bendix Aviation. A-M Ser. 21058. Ref. 25U-1001 w/rect. & resis. in base. Type E 80V AC. Type C. Coil amps .30 at 25C. Output volts 19. Ser. 1711-702. Spec. VR 9000-2C. Output amps 5.7. Input volt 22-30 W/resis. Leland Electric.

These regulators are in brand new condition, priced at

$2.75 each

CONDENSERS

MICA SOLAR XMB TAPPED HOLES

Mfd.	Price
2500 V Test	
.00001	$0.25
.00025	.25
.00003	.25
.00005	.25
.00075	.25
.0001	.25
.00015	.25
.00025	.25
.0003	.25
.0004	.25
.0005	.25
.00075	.25
.00085	.25
.001	.25
.0015	.25
.0016	.25
.0017	.25
.002	.50
.0023	.50
.003	.50
.004	1.75
.005	1.75
.006	1.75
.0063	1.75
.0069	1.75
.007	1.75
.0075	1.75
.0076	1.75
.008	1.75
.01	1.10
.015	1.10
.02	1.10
.025	1.10
.027	1.10
.03	1.10
5000 V Test	
.0015	1.75
.002	2.00

SOLAR XO Solder Lugs

2500 V Test	
.01	.55
.015	.55
.02	.55
.04	.55
.001	.60
.0015	.60
.002	.60
.0022	.60
.0023	.60
.0024	.60
.0025	.60
.0027	.60
.003	.60
.004	.60
.005	.60
.0056	.60
.006	.60
.0063	.60
.0075	.60
.0076	.60
.008	.60
.0085	.60
.0095	.60
.00085	.60
.00015	.60

Write For Many Others

MICAS

Ceramic	Case
120MMF 10KVW	$19.00
30MMF 10KVW	19.00
.08 MFD 1500	10.00
.045 MFD .2000	12.00
.0001 .20 KVW	24.00
.0051 .15 KVW	21.00
.001 .25K	35.00

TELEPHONE EQUIP.
TEST EQUIPMENT
TRANSFORMERS
TRANSMITTERS
TUBES
WAVEGUIDE
WAVEMETERS
WIRE

All merch. guar. Mail orders promptly filled. All prices F.O.B. N. Y. C. Send MO or Chk. Only shipping chgs. sent C.O.D. Rated concerns send P. O.

COMMUNICATIONS EQUIPMENT CO.

MIN. ORDER $3.00

131 Liberty St., New York, N. Y. **Dept. E-11** CHAS. ROSEN **Phone: Digby 9-4124**

FULLY GUARANTEED

BRAND NEW SURPLUS OFFERED BY A LEADING

A.C. MOTORS

5071930, Delco, 115 V., 60 Cycle, 7000 r.p.m. **Price $4.50 each net.**

36938-2, Haydon Timing Motor, 110 V., 60 cycle, 2.2 w., 4/5 r.p.m. **Price $3.00 ea. net.**

Type 1600 Haydon Timing Motor—110 V., 60 cycle, 3.2 w., 4 r.p.m., with brake. **Price $4.00 each net.**

Type 1600 Haydon Timing Motor—110 V., 60 cycle, 2.2 w., 1/240 r.p.m. **Price $3.00 each net.**

Type 1600 Haydon Timing Motor, 110 V., 60 cycle, 2.3 w., 1 r.p.m. **Price $2.70 each net.**

Type 1600 Haydon Timing Motor, 110 V., 60 cycle, 2.2 w., 1.1.5 r.p.m. **Price $2.70 each net.**

Type 1600 Haydon Timing Motor, 110 V., 60 cycle, 3.5 w., 1 r.p.m. With shift unit for automatic engaging and disengaging of gears. **Price $3.30 each net.**

Type 1600 Haydon Timing Motor, 110 V., 60 cycle, 2.2 w., 1/60 r.p.m. **Price $3.00 each net.**

Eastern Air Devices Type J33 Synchronous Motor 115 V., 400 cycle, 3 phase, 8,000 r.p.m. **Price $8.50 each net**

Telechron Synchronous Motor, Type B3, 115 V., 60 cycle, 2 r.p.m., 4 w. **Price $5.00 each net.**

Barber-Colman Control Motor, Type AYEC 5091, reversible 24 volts D.C., 7 amps 1 R.P.M., Torque 500 in. lbs. Contains 2 adjustable limit switches with contacts for position indication. Ideal for use as a remote positioner or a beam or television antenna rotator, will operate on A.C. 60 cycle. **Price $6.50 each net**

SERVO MOTORS

CK 1, **Pioneer,** 2 phase, 400 cycle. **Price $10.00 each net.**

CK 2 **Pioneer,** 2 phase, 400 cycle. **Price $4.25 each net**

10047-2-A Pioneer 2 phase, 400 cycle with 40:1 reduction gear. **Price $7.25 each net.**

FPE-25-16 Diehl Low Inertia 20 V., 60 cycle, 2 phase, 1600 r.p.m., 85 amps **Price $10.00 each net.**

CK2, **Pioneer,** 2 phase, 400 cycle, with 40:1 reduction gear. **Price $6.50 each net.**

CK3 Pioneer, 2 phase, 400 cycle. **Price $20.00 ea. net.**

MINNEAPOLIS-HONEYWELL TYPE B Part No. G303AY, 115 V., 400 cycle, 2 phase, built-in gear reduction, 50 lbs. in torque. **Price $10.00 each net.**

Kollsman Type 776-01 400 cycle 2 phase drag cup type, fix phase voltage 29, variable phase 35V. maximum, frequency 400 cycle. **Price $10.50 each net.**

REMOTE INDICATING MAGNESYN COMPASS SET

Pioneer Type AN5730-2 Indicator and AN5730-3 Transmitter 26 V., 400 cycle. **Price $40.00 per set new sealed boxes.**

Kollsman Remote Indicating Compass Set Transmitter part No. 679-01, indicator part No. 680k-03, 26 V., 400 cycle. **Price $12.50 each net.**

GYROS

Schwein Free & Rate Gyro type 45600. Consists of two 28 V. D.C. constant speed gyros. Size 8" x 4.25" x 4.25". **Price $15.00 ea. net.**

Sperry A5 Directional Gyro. Part No. 656029, 115 volts, 400 cycle, 3 phase. **Price $17.50 each net.**

Sperry A5 Vertical Gyro, Part No. 644841, 115 V., 400 cycle, 3 phase. **Price $20.00 each net.**

Sperry A5 Amplifier Rack Part No. 644890. Contains Western Frequency Meter, 350 to 450 cycle and 400 cycle, 0 to 130 voltmeter. **Price $10.00 each net.**

Sperry A5 Control Unit Part No. 644816. **Price $7.50 each net.**

Sperry A5 Azimuth Follow-Up Amplifier Part No. 656030. With tube. **Price $5.50 each net.**

Sperry A5 Autopilot Indicator, contains Pioneer AY20 Autosyn 26 V., 400 cycle. **Price $9.50 ea. net.**

Pioneer Type 12800-1-D Gyro Servo Unit 115 V., 400 cycle, 3 phase. **Price $10.00 each net.**

Norden Type MT Vertical Gyro 26 V., D.C. **Price $19.00 each net.**

Allen Calculator, Type C1 Bank and Turn Indicator, Part No. 21500, 28 V. D.C. Contains 28 V. D.C. constant speed gyro. **Price $10.00 each net.**

Type C1 auto-pilot in sheet steel case part No. G1088A3. **Price $15.00 each net.**

GOVERNMENT approved instrument repair station No. 3564.

D.C. MOTORS

5069625, Delco Constant Speed, 27 V., 120 r.p.m. Built-in reduction gears and governor. **Price $4.50 each net.**

A-1755, Delco Constant Speed Shunt Motor, 27 V., 2.4 amps., 3600 r.p.m., 1/30 h.p. Built-in governor. **Price $6.25 each net.**

C-28P-1A, John Oster Series Motor, 27 V., 0.7 amps., 7000 r.p.m., 1/100 h.p. **Price $4.50 each net.**

Jaeger Watch Co. Type 44-K-2 Contactor Motor. Operates on 3 to 4.5 volts D.C. Makes one contact per second. **Price $2.00 each net.**

General Electric Type 5BA10AJ52C, 27 V. D.C., 0.65 amps., 14 oz. in. torque, 145 r.p.m. Shunt Wound, 4 lead reversible. **Price $5.00 each net.**

General Electric Type 5BA10AJ37C, 27 V.D.C., 0.5 amps., 8 oz., in. torque, 250 r.p.m. Shunt Wound, 4 leads reversible. **Price $6.50 each net.**

General Electric Type 5BA10J18D, 27 V. 0.7 amps. 110 R.P.M. 1 oz. ft. torque. **Price $4.75 ea. net.**

D.C. ALNICO FIELD MOTORS

S. S. FD6-16, Diehl, 27 V., 10,000 r.p.m. **Price $4.50 each net.**

S. S. FD6-18, Diehl, 27 V., 10,000 r.p.m. **Price $4.50 each net.**

S. S. FD6-21, Diehl, 27 V., 10,000 r.p.m. **Price $4.50 each net.**

5069600 Delco 27.5 V. 250 R.P.M. **Price $10.00 each net.**

706343 Delco 27.5 V. 10,000 R.P.M. Shaft 0.5 in. long. **Price $7.50 ea. net.**

5068571 Delco 27.5 V. 10,000 R.P.M. with blower assembly. **Price $10.00 ea. net.**

5071895 Delco 27.5 V. 250 R.P.M. **Price $10.00 ea. net.**

5072400 Delco 27.5 V. 10,000 R.P.M. Shaft 0.5 in. long with worm gear. **Price $6.75 ea. net.**

GENERAL ELECTRIC D. C. SELSYNS

8TJ9-PDN Transmitter, 24 V. **Price $3.75 each net.**

8TJ9-PAB Transmitter 24V. **Price $3.75 each net.**

8DJ11-PCY Indicator, 24 V. Dial marked —10° to +65°. **Price $4.50 each net.**

8DJ11-PCY Indicator, 24 V. Dial Marked 0 to 360°. **Price $7.50 each net.**

AMPLIFIER

Pioneer Gyro Flux Gate Amplifier, Type 12076-1-A. **Price $17.50 ea. net, with tubes.**

G. E. Servo Amplifier Type 2CV2A1, 115 V. 400 cycle. **Price $10.00 ea. net.**

Minneapolis Honeywell Amplifier Type G403, 115 V. 400 cycle. **Price $8.00**

INSTRUMENT ASSOCIATES

37 EAST BAYVIEW AVE., GREAT NECK, N. Y.
Telephone GReat Neck 4-1147

Write for Catalog NE100

U. S. Export License-2140

SUPPLIER OF ELECTRONIC & AIRCRAFT EQUIPMENT

IMMEDIATE DELIVERY

INVERTERS

Wincharger Corp. Inverter PU/16 type MG 750, Input 24 V.D.C., 60 amps. Output 115 V., 400 cycle, 1 phase, 6.5 amps. **Price $60.00 each net.**

153F, Holtzer Cabot, Input, 24 V.D.C. Output 115 V., 400 cycle, 3 phase, 750 V.A. and 26 V., 400 cycle, 1 phase, 250 V.A. Voltage and frequency regulated also built in radio filter. **Price $115.00 each net.**

149H, Holtzer Cabot. Input 28 V. at 44 amps. Output 26 V. at 250 V.A., 400 cycle and 115 V. at 500 V.A., 400 cycle. **Price $40.00 each net.**

149F, Holtzer Cabot. Input 28 V. at 36 amps. Output 26 V. at 250 V.A., 400 cycle and 115 V. at 500 V.A., 400 cycle. **Price $40.00 each net.**

12117, Pioneer. Input 12 V.D.C. Output 26 V., 400 cycle, 6 V.A. **Price $22.50 each net.**

12117-2 Pioneer. Input 24 V.D.C. Output 26 V. 400 cycle, 6 V.A. **Price $20.00 each net.**

12116-2-A Pioneer. Input 24 volts D.C. 5 amps. Output 115 volts 400 cycle single phase 45 watts. **Price $100.00 each net.**

5D21NJ3A General Electric. Input 24 V.D.C. Output 115 V., 400 cycle at 485 V.A. **Price $15.00 each net.**

PE 218, Ballentine. Input 28 V.D.C. at 90 amps. Output 115 V., 400 cycle at 1.5 K.V.A. **Price $50.00 each net.**

METERS

Weston Frequency Meter, Model 637, 350 to 450 cycles, 115 volts. **Price $10.00 each net.**

Weston Voltmeter. Model 833, 0 to 130 volts, 400 cycle. **Price $4.00 each net.**

Weston Voltmeter. Model 606, Type 204 P, 0 to 30 volts D.C. **Price $4.25 each net.**

Weston Ammeter. Model 506, Type S-61209, 20-0-100 amps. D.C. **Price $7.50 each net with ext. shunt.**

Weston Ammeter. Type F1, Dwg. No. 116465, 0 to 150 amps. D.C. **Price $6.00 each net. With ext. shunt $9.00 each net.**

Westinghouse Ammeter. Type 1090-D-120, 120-0-120 amp. D.C. **Price $4.50 each net.**

Weston Model 545. Type 82PE Indicator. Calibrated 0 to 3000 RPM. 2¾" size. Has built-in rectifier, 270° meter movement. **Price $15.00 each net.**

RECTIFIER POWER SUPPLY

General Electric, Input 230 V. 60 cycle 3 phase. Output 130 amps. at 28 V. D.C. Continuous duty, fan cooled, has adjustable input taps. G.E. model No. 6RC146F. Size: Height 46", width 28", depth 17½". **Price $200.00 each net. New**

PIONEER AUTOSYNS

AY1, 26 V., 400 cycle. **Price $5.50 each net.**

AY14D, 26 V., 400 cycle, new with calibration curve. **Price $15.00 each net.**

AY20, 26 V., 400 cycle. **Price $7.50 each net.**

AY5, 26V., 400 cycle. Has hollow shaft. **Price $7.50 ea. net.**

PRECISION AUTOSYNS

AY101D, new with calibration curve.

PRICE—WRITE OR CALL FOR SPECIAL QUANTITY PRICES

AY131D, new with calibration curve. **Price $35.00 each net.**

AY201-2-A. **Price $35.00 each net.**

PIONEER AUTOSYN POSITION INDICATORS

Type 5907-17. Dial graduated 0 to 360°, 26 V., 400 cycle. **Price $15.50 each net.**

Type 6007-39, Dual. Dial graduated 0 to 360°, 26 V., 400 cycle. **Price $30.00 each net.**

PIONEER TORQUE UNIT

Type 12602-1-A. Price **$40.00** each net.



Type 12606-1-A. Price $40.00 each net.
Type 12627-1-A. Price $80.00 each net.

MAGNETIC AMPLIFIER ASSEMBLY

Pioneer Magnetic Amplifier Assembly Saturable Reactor type output transformer. Designed to supply one phase of 400 cycle servo motor. **Price $8.50 each net.**

PIONEER TORQUE UNIT AMPLIFIER

Type 12073-1-A, 5 tube amplifier. Magnesyn input, 115 V., 400 cycle. **Price $17.50 each net with tubes.**

ALL PRICES, F. O. B. GREAT NECK, N. Y.

BLOWER ASSEMBLY MX-215 APG

John Oster, 28 V.D.C., 7000 r.p.m. 1/100 h.p. **Price $4.50 each net.**

Westinghouse Type FL Blower, 115 V., 400 cycle, 6700 r.p.m., Airflow 17 C.F.M. **Price $3.70 each net.**

RATE GENERATORS

F16, Electric Indicator Co., two-phase, 22 V. per phase at 1800 r.p.m. **Price $12.00 each net.**

J36A, Eastern Air Devices, .02 V. per r.p.m. **Price $9.00 each net**

B-68, Electric Indicator Co., Rotation Indicator, 110 V., 60 cycle, 1 phase **Price $14.00 each net.**

PM-1-M Electric Indicator Co. Same as type B35. 2 V. per 100 R.P.M. Max speed 5,000 R.P.M. Can be used as D.C. motor, 1/77 H.P. 115 V. D.C. **Price $9.75 ea. net.**

SINE-COSINE GENERATORS (Resolvers)

FPE 43-1, Diehl, 115 V., 400 cycle. **Price $20.00 each net.**

SYNCHROS

1F Special Repeater, 115 V., 400 cycle. Will operate on 60 cycle at reduced voltage. **Price $15.00 each net.**

7G Generator, 115 V., 60 cycle. **Price $30.00 each net.**

2J1F3 Selsyn Generator 115 volts, 400 cycle. **Price $5.50 each net.**

2J1M1 Control Transformer 105/63 V., 60 cycle. **Price $20.00 each net.**

2J1G1 Control Transformer, 57.5/57.5 V., 400 cycle. **Price $1.90 each net.**

2J1H1 Selsyn Differential Generator, 57.5/57.5 V., 400 cycle. **Price $3.25 each net.**

W. E. KS-5950-L2, Size 5 Generator, 115 V., 400 cycle. **Price $10.00 each net.**

5G Generator 115 volts, 60 cycle. **Price $50.00 each net.**

5SF Repeater, 115/90 V., 400 cycle. **Price $19.00 each net.**

2J1F1 Selsyn Generator, 115 V., 400 cycle. **Price $3.50 each net.**

5SDG Differential Generator 90/90 V., 400 cycle. **Price $12.00 each net.**

1CT Control Transformer, 90/55 volts, 60 cycle. **Price $40.00 each net.**

POSITION TRANSMITTER

Pioneer Type 4550-2-A Position Transmitter, 26 volts 400 cycle, gear ratio 2:1. **Price $15.00 each net**

INSTRUMENT ASSOCIATES

37 EAST BAYVIEW AVE., GREAT NECK, N. Y.
Telephone GReat Neck 4-1147

Write for Catalog NE100

Western Union address: WUX Great Neck, N. Y.

LEGRI S COMPANY, Inc.

130 WEST 102nd STREET
NEW YORK 25, N. Y.
Phone: ACademy 2-0018

SOME MONTHS AGO we mailed a letter to all our customers and potential customers about resistors.

The letter told the story about resistors - - - a true story - - -. We know, we cannot fill all orders. We also regret, that the difficulties in getting resistors "through a roundabout course" increases prices so much, that we often refuse to buy these components.

Although we are a small Company, we promise to do everything possible, so that the temporary shortage of resistors shall not affect your production schedules.

We thank all of you for the confidence expressed in hundreds of orders and promise to try our best to fill them all, although there may be some delays.

Thanking you for your valued patronage, we are

Sincerely yours,

Legri S Company, Inc.

G. Grinn

Gregory Grinn, President

NOTICE: Mail us your requirements list for resistors, also your surplus list on the same. We exchange or will help you to exchange on a dollar-for-dollar basis.

ARROW has the VALUES!

BC-605 INTERPHONE AMPLIFIER

Easily converted to an ideal intercommunication set for office — home — or factory.

Original—New $4.95
Like New 3.95
(With Schematic)

See April 1950 Radio News for complete conversion data.

BC-604 TRANSMITTER FM 20-28 MC

11 and 15 meters. Can be operated on 10 meters—10 channel push button crystal. With all tubes and meter but less dynamotor. Excellent Condition $19.95

Crystals—
Set of 80 ..... $19.95

BC 603

Receiver—Good. Used $24.95

RC 100 B RADIO EQUIPMENT



Consisting of the following:

CH-118 Standard 19" rack 5 feet tall.
BC-769 Transmitter — 470 megacycles.
BC-779 Keying unit for transmitter.
BC-768 Receiver — 490.5 megacycles.
RA-52 Rectifier unit for Transmitter. (Metered with 0-15 KV and 0-20 MA meters and controlled with transfat).
AN-82B Antenna system.
FL-25 Wave Trap.
MC-377 ¾ inch, 70 ohm air dielectric concentric line for transmission.
BC-773 Control Box.
BC-783 B Amplifier.
M-349 Air Compressor.
M-348 Oven (dehydrator).
BC-771 Frequency meter.
TM 11-1113B Technical manual.

This equipment may be purchased as a unit or any component separately. Prices will be furnished on request.

CONDENSERS

	Each
1 mfd. 6000 VDC OIL FILLED	$1.98
.00025 mfd. 25000 VDC OIL FILLED	2.95
4 mfd. 1500 VDC OIL FILLED	.29
	10 for 2.49
2 mfd. 600 VDC. OIL FILLED	.39
	3 for 1.00
1 mfd. 600 VDC. OIL FILLED	.24
	5 for 1.00
4 mfd—500 VDC oil filled	49¢
1-1-1—1200 VDC. OIL FILLED	.59
	2 for 1.09
50 mmfd—5KV—3 Amp. Vacuum Cond.	1.19

IS-185 Weston Voltmeter Model 433—0 to 150 VAC 25 to 2400 cycles. New $24.95

FLAP PITCH MOTOR

24 VDC will operate on AC—3200 or 11,000 R.P.M. Complete with gear box and limit switches ..... ea. $2.95

RT7/APN1 TRANSCEIVER UNIT—

Used as an altimeter, it may be converted for signaling control circuits, etc. Complete with 14 tubes and dynamotor they are in good used condition at the amazingly low price of $4.95

PORTABLE VHF COMMUNICATION UNIT

Two way radio telephone equipment designed for operation between 152 and 162 megacycles FM. Adaptable for many uses, a complete unit including the rechargeable storage battery weighs but fifteen pounds, and is housed in a sturdy case 11¾"x9"x14¼", provided with shoulder straps.

This brand new set of big name manufacture comes complete with battery, battery tray, and $89.50
handset but less crystal.

Battery charger is extra at $19.95

MOBILE VHF COMMUNICATION UNIT

Adaptable for many mobile uses, this is a compact unit 23¾"x8"x10¾", operating on 152 to 162 megacycles FM. It is six-volt powered direct from storage battery, and is complete with the tone filter and crystal; handset, control box, antenna and installation kit. Brand new, ready to go. $129.50

Extra 18" stub type antennae are available $2.95

Miscellaneous SPECIALS

	Used	New
R-7 APS-2 Receiver Indicator	——	$79.50
R-7 APS-15 Receiver Indicator	34.50	——
ASB-7 Indicator Scope	12.95	——
SCR-522 Transceiver 100 to 150 MC	34.95	75.00
MN-26 C	17.50	24.95
RA-10-DA Receiver	17.50	24.95
RT7-APN1 Transceiver	4.95	9.95
APN-1 Complete	——	24.50
BD-71-G Pos. Switchboard	9.95	12.95
EE-8 Field Phones	7.95	——
BC-347 Interphone Amplifier	——	2.95
I-70 Tuning Meter	——	.89
BC-461 Veeder Root Counter	——	.59
BC-442 Loss Condenser	1.49	1.95
APS-13 UHF Antenna, Pair	——	98
FL-8 Filter	——	2.95
I-97 Bias Meter	3.95	4.95
RM-29 Remote Telephone Control	7.95	9.95
RL-42 Antenna Gearbox Motor and Reel	4.95	7.50
TS-10—Sound powered phones	6.50	——

BC-1066-A—120 to 225 MC Portable Receiver adaptable for many amateur uses. In Canvas Carrying Bag. New $6.95

Tuning Units for BC-375—Presently most numbers are available in excellent condition with case at ..... $2.95 ea.

BC-806—Antenna Tuning Unit for BC-375. Excellent condition ..... $1.50 ea.

One Tube Interphone Amplifier—Small compact aluminum case fully enclosed. 2¼"x3¾"x3¾". Less Tube ..... 79¢

96Q1 Complete Antenna assembly with motor and frame as used in ARC-1 Transmitter. New $35.00

BC-709 Battery operated lightweight interphone amplifier. Complete with tube and shock mount, but less battery ..... New $4.95

SCR-181 Complete ..... New $49.50

229-MA Circuit Breaker ..... New 59¢

Collins VFO Dial—5 calibrated ham bands from 2.2 Mc to 32 Mc complete with pointer, gears, logging dial and flywheel. Scale 6" on 8" plate. New 95¢ ea.

C-1R—Antenna coil assembly slug tuned used in RC-60 receiver. Frequency range 26-27.9 Mc—fully shielded ..... New 10 for $1.95

I-82-F—Five Inch 360 degree compass indicator and servo receiver ..... New $4.95

A-81-2 Transmitter selsyn for 182 indicator $2.45
(Both 182F & Trans. Selsyn for $7.00)

MC-385A—Headset Adapter ..... New 49¢

Information and Prices on Request

BC-639 Receiver with RA-42 Rectifier.
RTA-1B Transceiver
TA-2121 Transmitter and MP-10G Power Pack
SCR-269 Compass Installation
R-5/ARN-7 Compass Installation
MN-26 Compass Installation
I. L. S. Installation (R-89-BC733)
MD-22-URA-TI Radar Modulator
AN-APRI Receiver and Tuning Units
ASB-7 Complete Radar Installation

BC 620

Receiver-Transmitter — 2 crystal channels—20 to 27.8 MC—FM—13 tubes—Metered, Plate and Filament ..... Used $9.95

PE-97 or PE-117 or PE-120 Power Supply for above 6-12 volt vibrator type ..... Used less tubes, vib. & con. $2.95
Used Complete $6.95

FT-250 Mount for both BC-620 and PE-97. New $1.50

BC 659

Receiver-Transmitter similar to BC-620 with frequency range of 27.9 to 38 MC F.M. Excellent — Used $19.95

4 mfd—500 VDC oil filled ..... each 49¢

BC 223

Brand new Transmitter with all three tuning units, two tuning unit cases, spare tube carrying case, shock mount and brace, but less tubes at new low price of $29.95

Set of 5 tubes $3.95
Tuning units are available separately at ..... Ea. $2.50
PE-125—12-volt Vibrator Pack ..... New $12.95
Used 8.95

BC 906—FREQUENCY METER

Range 150-225 MC with modification possible for lower frequencies of TV, etc. Contains 6 tube heterodyne and uses Battery pack of 1.5 V and 45 VDC $10.95
Less New—Less Batteries

HERMETICALLY SEALED CHOKES

10 H. 100 M.A. ..... 59¢
50 H. 100 M.A. ..... 95¢
3, 7 H. 145 M.A. ..... 59¢
10 H. 25 M.A. ..... 39¢

TEST EQUIPMENT

EV-10 Precision Vacuum Tube Test Set	used	$28.00
No. 772 Weston Multi Tester	used	40.00
No. 492 Radio City Products Volt-Ohm Meter	used	25.00
No. 471 Radio City Products Output Meter	used	10.00
No. 803 Radio City Products Tube Tester & Set Tester	used	35.00
No. 777 Weston Tube Checker	used	29.00
No. E-200 Precision Signal Generator	used	25.00
No. M-652 Jackson Audio Oscillator	used	30.00
No. 224-A Dumont Oscilloscope	used	80.00
No. 155-A RCA Oscilloscope	used	90.00
No. M-840 Triumph Oscilloscope	used	75.00
BC-1287 Oscilloscope	used	75.00
BC-221 Frequency Meter	Like New	90.00
Others as Low as		49.50

PRICE UPON REQUEST

I-98-A	TS13/AP
I-114 P/O BC-68	TS16/APN
I-135 P/O IE-17	TS19/APQ5
I-167 Weston Anal. # 772	TS27 TSM-1
I-183 Freq. Meter	TS34/AP
I-185 Oscillator	TS36/AP
I-187 Synchronizer	TS47/AP
I-189 Calibrator	TS59/APN-1
IE-19	TS62/AP
IS-185 Voltmeter	TS102A/AP
TS3/AP	TS126/AP
TS10A/APN	TS-251 Less Xtal

HEADSETS—MIKES

HS-23 Hi Imp. Headsets	New	$2.95
HS-33 Lo Imp. Headsets	New	2.95
HS-30 Hi Imp. Headsets	New	1.50
	Used	.79
HS-38 Lo Imp. Headsets	Used	.75
T-17D Carbon Mike	New	2.75
	Used	1.50
T-21 Hi Imp. Carbon Mike	New	1.19
T-30 Throat Mike	New	.98
T-45 for Navy Lip Mike	New	.98

RC 150 EQUIPMENT

Receiver BC-1161-A	New	$29.95
Transmitter BC-1160-A	New	29.95
Control unit BC-1162-A New but less tubes		14.95
Signal Generator I-158-A	New	24.95

All shipments FOB warehouse. 20% Deposit required on all orders. Minimum order accepted—$5.00. Illinois residents, please add regular sales tax to your remittance.

ARROW SALES, Inc.
Dept. 15
1712-14 S. Michigan Ave., Chicago 16, Ill.
PHONE: HArrison 7-9374

Special Relays—

OVER A MILLION IN STOCK!

Whether you require large quantities of relays for production runs or single units for laboratory or amateur work, Wells can make immediate delivery and save you a substantial part of the cost.

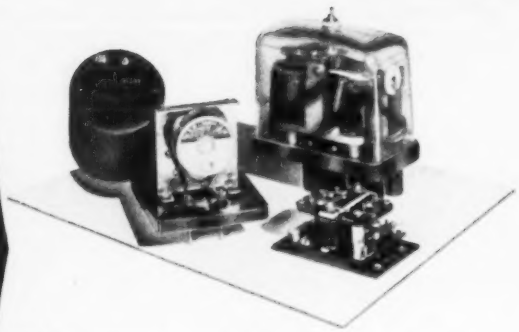

This list represents only a few types of Special Relays. We also have huge stocks of Standard D.C. Telephone Relays, Midget Relays, Contactors, Keying Relays, Rotary and Slow Acting Types as well as many others. Write or wire us about your requirements.

STOCK NO.	VOLTAGE	OHMAGE	CONTACTS	MANUFACTURER & NUMBER	PRICE
R-503	12-32 VDC	100	3A 2C	G.E. Ant. Keying 500W 2C6530-A5[AK]	$ 2.25
R-748	600 VDC		Max 2A Amps.	Allen Bradley #10 Dashpot	5.95
R-804	550 VAC		1B 2A Amps.	Cutler Hammer C-26117-A34 Contactor	3.50
R-356	115 VAC		Adj. Ctr. Breaker 04-16A	Westinghouse MN Overload	12.95
R-579	220 VAC		1B	Adlake 60 Sec. Thermo Delay	6.95
R-794	27.5 VDC	200	1B	Edison 50 Sec. Thermo Delay	4.25
R-686	115 VAC		2C	Leach 115/71-9/20 Sec. ADJ. Delay	4.95
R-746	115 VAC		1B	Cramer 7 Min. Adj. Time Delay	8.95
R-746A	115 VAC		1A	Cramer 7 Min. Adj. Time Delay	8.95
R-611	24 VAC		1A 10 Amps.	Dunwold RF-61	4.25
R-783	12 VDC	175	AC 10 Amps.	Onan Rev. Current 304512-B24	1.00
R-414	18-28 VDC	60	1A 15 Amps.	Rev. Current Cutout 2HC10A E1	3.50
R-360		200	1C	W. U. Tel. Co. 41C Single Current	3.75
R-745	12 VDC	25	4 in Mercury Lever		.95
R-527	6-12 VDC	50-50	In Series	227668 Fig. Set 2241N	.95
R-548	12-24 VDC	60-60	1C	G.E. Push Button Remote Relay CR2791-R1B6CX	1.65
R-556			1A	G.E. Pressure Switch 2527B100-G2	.95
R-569	75 VAC	400 CYC	1B 1A	Clare 400	.95
R-580	6 VDC		1" Stroke	Cannon Plunger Relay 13672	.95
R-651	24 VDC	100	Solenoid Valve		2.50
R-795	12 VDC	175	Automatic Drop		2.15
R-216	5-8 VDC	2	2A 1C	Guardian Ratchet Relay	2.15
R-453	12 VDC	12	Motor	Ratchet Relay From Set 522	4.25
R-575	12 VDC	250	1A 1B 2C	Guardian BR-10	2.75
R-716	28 VDC	70	1A 5 Amps.	BR-13	1.45
R-577	6-12 VDC	35	1C 1A	Guardian BR-16	1.05
R-609	6-12 VDC	40	1C 10 Amps.	Guardian BR-17A	1.25
R-774	6 VDC	1500	1C 5 Amps.	Kurman BR-24	2.10
R-795	6 VDC	40	1C Ceramic	35A High Power	1.25
R-580	12 VDC	10-10	1C 5 Amps.	Sm. Dunn Latch & Reset	2.85
R-810	12 VDC	10-10	1C 5 Amps.	Guardian Latch & Reset	2.85
R-811	24 VDC	1000	1C	Sigma 5R	1.65
R-578	75 VAC 60			Edwards Alarm Bell	.95
R-838	6-12 VDC	375	1A	Allen Bradley Bulletin 702 Motor Control	4.50
R-839	110-120 VAC	2100	1A	Allen Bradley Bulletin 2000 Motor Control	4.50
R-840	110 VAC	1150	2A	Allen Bradley Bulletin 709 Size 1 Motor Control W Type N Thermals	5.50
R-841	110 VAC	1700	4A	Allen Bradley Bulletin 709 Size 2 Motor Control W Type N Thermals	25.00
R-842	110 VAC	375	1A	Allen Bradley Bulletin 709 Motor Control W Type N Thermals	5.50
R-843	110 VAC	1150	1A	Allen Bradley Bulletin 706 Motor Control	4.50
R-844	110 VAC	1700	1A 1B	Allen Bradley Bulletin 702 Motor Control	4.50
R-845	110 VAC	Unused	1A	Allen Bradley Bulletin 701 Motor Control	4.50
R-900	12-24 VDC	6.5	1A 250A 1000A Surge	Leach R-5	2.50
R-901	110 VAC		1A 10 Amps.	Leach 5004	2.75
R-902	24 VDC	1400	1A Diff. Rly. 10 Amps.	Wheelock Signal BT-39	1.45
R-903	220 VAC		1A Diff. Rly. 10 Amps.	Wheelock Signal AT-32	1.45
R-904	110 VAC	Unit only. Not a complete relay		Leach 5003	.75
R-758		See page 4 for relay		Guardian 18167	.50

Write For New Wells Catalog

WELLS SALES, INC.

Each relay is new, individually boxed, and unconditionally guaranteed by Wells

World's Largest Display of Radio and Electronic Components

9,000 Square Feet of Display All On One Floor

320 N. LA SALLE ST., DEPT. SL, CHICAGO 10, ILL.

MOTOR GENERATORS DYNAMOTORS, INVERTERS, ETC.



2.5 KVA MG SET. Diehl Elec. Co. 120V DC to 120V AC, 60 cy, 1 Ph. Complete with Magnetic Controller, 2 Field Rheos and Full Set of Spare Parts including Spare Armatures for Generator and Motor. Full specs. on request. New **$285.00**

2 KVA MG SET. O'Keefe and Merritt. 115V DC to 120V AC, 50 cy. Idles as 3 Ph. synco motor on 208V, 50 cy. New. Export crated **$165.00**

1.25 KVA MG SET. Allis-Chalmers. 115V DC to 120V, AC, 60 cy, 1 Ph. Fully enclosed. Splashproof. Ball Bearings. New. **$97.50**

Same machine but for 230V DC operation **$110.00**

Spare Parts for either machine **$15.00**

MG SET FOR NAVY TBS TRANSMITTER. Type CG-21302. 440V AC, 60 cy, 3 Ph, 1500 VA to 875V DC and 300V DC. New **$69.50**

DYNAMOTOR. Navy Type CAJO 211444. 105/130V DC to 13V DC at 40A or 26V DC at 20A. Radio filtered. Complete with Line Switch. New **$69.50**

DYNAMOTOR. Elecr. 32V DC to 110V AC, 60 cy, 1 Ph, 2.04 Amps. New **$24.50**

DYNAMOTOR. Elecr. 32V DC to 110V AC, 60 cy, 1 Ph, 0.43 Amps. New **$17.50**

AMPLIDYNE—G. E. Model 5AM31NJ9A. 530 Watts. 750c R.P.M. Input: 27V DC, Output: 60V, DC. Weight 34½ lbs. New **$10.50**

AMPLIDYNE—G. E. Model 5AM21JJ7. 4600 R.P.M. Motor Compound wound. 150 Watts. Input: 27V. DC. Output: 60V. DC Sig. Corps. U. S. Army MG-27-B. New **$26.50**

INVERTER—Leland Elec. Co. Model PE206A. Input: 28V. DC, 38 Amps. Output: 80V., 800 cy. 495 VA. New **$12.50**

INVERTER—G. E. Model 5D-21NJ5A. Input: 24V. DC. Output: 115V. 400 cy. 485 Va. New **$12.50**

PE 218 INVERTER—G. E. 5B160172. Input: 28V. DC. Output: 115V. 400 cycles at 1.5 KVA. **$50.00**

D. C. MOTOR—G. E. Model 5BA 50LJ2A 0.5 HP. Armature 27V. at 3.3 Amps. Field: 60V. at 2.3 Amps. R.P.M. 400. New **$12.50**

DYNAMOTOR—Type PE94C. For use with SCR522 Transmitter-Receiver. Brand new in export cases **$9.50**

U. S. NAVY SOUND POWERED BATTLE PHONES

Western Electric No. D173312, Type O. Combination headset and chest microphone as illustrated. Brand new including 20 ft. of rubber covered cable **$17.50**

Automatic Elec. Co. No. GL843AG. Similar to above but including Throat microphone in addition to chest microphone. Brand new with 20 ft. rubber covered cable. **$13.50**

SYNCHRO GENERATORS

Brand new—Gov't. sealed and inspected—Packed in original cans. Synchro Transmitters 115 V., 60 cy. operation. Precision accuracy made for gun fire control. Cost Gov't. $80.00 each. Wgt. 5 lbs. Dimensions: 4½" L x 3¾" Brand New Per Pair **$17.50**

S. G. RADAR EQUIPMENT

Navy Yard Spares for Model SG Radar

Consisting of the following:

2—CRP-20ABM Rectifier Power Units for modulation generators.
2—CRP-20AHM Rectifier Power Units for Radar Receivers.
2—CRP-35AAH Modulation Generators.
3—CRP-46ARD-1 Radar Receivers (including R-906 Gain Controls for Range and Train Indicators).
2—CRP-60AAN Signal Monitors.
2—Complete Transmitter R.F. System coupling assemblies including—10087 magnets and Duplexing tube cavity assemblies.
1—Complete Power Control Chassis.
2—Complete Driver and modulator assembly including driver chassis with delay line, Modulator and Driver Rectifier Tube Assembly and Driver Rectifier Power Unit.
2—Complete sets of equipment spare part consisting of R.F. Assemblies, motors and accessories, switches, interlocks, fuses, fuse holders, fuse links, relays, contacts, crystals, thermostats, R.F. inductors, capacitors, sockets, test equipment, cables, resistors, etc., as listed in Navy Spare Parts List WX3885.
All above in new and unused condition packed in original metal spare parts boxes.

RADAR COMPONENTS

CRP-23AGC Load Dividers for use with S.G. Modernization Kits. New.
CBM-50AFO Navy type Radar Repeater Adapters. New and complete with 14 tubes, coax fittings, installation plans and wiring diagram.
Synchro Amplifiers. New.
Type CARD 23AEK Bearing Control Units. New.
Type T.D.Y., SO-1, SO-12, SO-3 Radar Antenna Assemblies. New.
Radar Crystals Raytheon 98.35 KC.
Type SO-11 Radar Modulator.
Type SO-1 Transmitter Receivers.

MODEL AN/APA-10 PANORAMIC ADAPTER

Provides 4 Types of Presentation:
(1) Panoramic (2) Aural
(3) Oscillographic (4) Oscilloscopic

Designed for use with receiving equipment AN/ARR-7, AN/ARR-5, AN/APR-4, SCR-587 or any receiver with I.F. of 455kc, 5.2mc, or 30mc. With 21 tubes including 3" scope tube. Converted for operation on 115 V, 60 cycle source.
PRICE **$245.00**
AN/APA-10 80 Page Tech. Manual **$2.75**

MICROWAVE TUNING UNITS

Tuning Units for APR-1 or APR-4, TN-16 (38.95 mc.) TN-17 (74-220 mc) TN-18 (300-1000 mc.) These front ends may be used with any 30 mc. IF amplifier or as converters into receivers tuned to 30 mc.

LINEAR SAWTOOTH POTENTIOMETER

W.E. KS-15138

Has continuous resistance winding to which 24 volts D.C. is fed to two fixed taps 180° apart. Two rotating brushes 180° apart take off linear sawtooth wave voltage at output.
Brand New $5.50

LAVOIE FREQ. METER MICRO-WAVE

375 to 725 MCS

Model TS-127/U is a compact, self-contained, precision (± 1 MC) frequency meter which provides quick, accurate readings. Requires a standard 1.5V "A" and 45V "B" battery. Has 0-15 minute time switch. Contains sturdily constructed HI-"Q" resonator with average "Q" of 3000 working directly into detector tube. Uses 957, L58 and 3S4 Tubes. Complete, new with inst. book, probe and spare kit of tubes. Less batteries. Write for descriptive circular **$69.50**

RAYTHEON VOLTAGE REGULATOR Adj. input taps 95-130V., 60 cy. 1 Ph Output: 115V., 80 Watts, ½ of 1% Reg. Wt. 20 lbs. 6¾" H x 8¾" L x 4⅝" W Overload protected. Sturdily constructed. Tropicalized.



Special **$14.75**

400 CYCLE TRANSFORMERS

AUTO. 400 cy. G.E. Cat. No. 80G184. **KVA** .9458—.5201. Volts 460/345/230/115. New $3.45

FILAMENT. 400/2600 cy. Input: 0.75/80/85/105/115/125V. Output: 5V3A/5V3A/5V3A/5V3A/5V6A/5V6A/6.3V6A/6.3V6A/6.3V5A. New **$1.98**
THYRATRON POWER. 400/1600 cy. Raytheon UX-8876. 400/1600 cy. Pri: 115V, Sec: 50-0-50V at 0.5A, 6.3V at 1.2A. Test r.m.s. 1780. New **$2.75**
PLATE WECO KS89560. 400/800 cy. Pri: 115V. Sec: 1350-0-1350 at .057A /2700 V Total. Electrostat shided. Wt. 2.3 lbs. New **$2.95**
SCOPE PL. & FIL. WECO 9556. 400/2400 cy. Pri: 115, 105, 95V. Wdg. 1125V at .008A. Fil. Wdgs. 6.4V4A/2.5V1.75A/6.4V.6A. Electstat shided. Wt. 1.4 lbs. New **$2.75**
FILAMENT. 400/2400 cps. WECO KS89553. Pri: 115V. Sec: 6.3V1.25A/6.35V1.5A. Electstat shided. Wt. 0.5 lbs. New **$1.65**
PLATE & FIL. 400/2600 cy. Pri: 0-80/115V. Sec #1=1200VDC at 1.5MA. Sec#2=400VDC at 130MA. Fil. Sec: 6.4V4.5A/6.35VO.8A. Insl 1500V1/5V2A/5V2A **$3.95**
RETARD. 400 cy. WECO KS89596. 4 Henry 100MA **$1.00**

400 CY. SERVO TRANSFORMERS

G.E. #68G665X Pri: 57.5V. Sec: #1=28.75V. Sec: #2=28.75V **$1.50**
G.E. #68G666X Pri: 57.5V. Sec: 115V C.T. **$1.50**
G.E. #68G667 Pri: 220V C.T. Sec: 220V C.T. **$1.50**
G.E. #68G668X Pri: 115V. Sec: 275V/275V/275V/275V/230V/230V/6.3V CT/6.3V CT. **$3.50**

60 CYCLE TRANSFORMERS

1.5 KVA STEPDOWN. G.E. Cat. No. 7G3173. Pri: 115/230V Sec: 23/11.5V. Either high voltage connection may be used with either low voltage connection **$23.95**
50 KVA STEPDOWN. Standard Trans Corp. trans type MD. Pri: 450V111A, Sec: 117V427A, Navy type. Ambient temp. 50 Deg. C **$125.00**
FILAMENT. Raytheon Hypersil Core. Pri: 115V. Sec: 6.5V22A/6.5V2.4A/6.5V2.25A/6.3VO.6A. Insl for 1700V **$3.95**

PULSE TRANSFORMER

PULSE. WECO KS 9563. Supplies voltage peaks of 3500V from 807 tube. Tested at 2000 Pulses/sec and 5000V peak. Wdg. 1-2=1.5 ohms. Wdg. 1-3=72 ohms. L of Wdg. 1-3=.073-.082H at 100 cps **$5.50**

High Voltage Capacitors Oil Filled

.25 MFD., 20KV	$17.75
.25 MFD., 15KV	$15.75
.5 MFD., 25KV	$26.50
1 MFD., 15KV	$18.50
1 MFD., 7.5KV	$ 7.95

All brand new. Made by prominent manufacturers.

SWEEP GENERATOR CAPACITOR

High speed ball bearings. Split stator silver plated coaxial type 5/10 mmfd. Brand new.

$2.50

PARABOLOIDS

Spun Magnesium dishes 17½" dia., 4" deep. Mounting brackets for elevation and azimuth control on rear. 1½" x 1⅝" opening in center for dipole. Brand new per pair **$8.75**

All prices indicated are F O B Tuckahoe, New York. Shipments will be made via Railway Express unless other instructions issued.

ELECTRONICRAFT

INC.

5 WAVERLY PLACE TUCKAHOE 7, N. Y.
PHONE: TUCKAHOE 3-0044

All merchandise guaranteed. Immediate delivery, subject to prior sale.

All Prices Subject to Change Without Notice

TEST EQUIPMENT



X Band Spectrum Analyzer 8500-9600 Mc., calibrated linear below cut-off attenuator, calibrated frequency meter, tuned mixer, 4 I.f. stages, 3 video stages overall gain 125 db., regulated power supply.

S Band Spectrum Analyzer 2700-3900 Mc., similar to above.

X Band Test Load low power low power $20.00

X Band Below Cut-Off Wave Guide Attenuator, with calibrated dial, type N input connector, output connects to ½" x 1" wave guide $55.00

X Band Test Load, low power $15.00

TS-62 X Band Echo Box with r.f. cable and pick-up antenna.

TS-33 X Band Frequency Meter, 8500-9600 Mcs. Crystal detector and 50 micro-amp. meter. Indicates Resonance. Connection for scope available.

TS-45A APM-3 Signal Generator, 8700-9500 mc., 110 V, 60-800 cps.

TS-35-AP X Band Signal Generator, pulsed, calibrated power meter, frequency meter, 8700-9500 mc.

30 MC I.F. STRIP, VIDEO, and AUDIO AMPLIFIER AND 110 Volt 60-2600 cps POWER SUPPLY. Bandwidth 10 mc, new, part of APR-5 Receiver $65.00 less tubes

AMPLIFIER STRIP AM-55A/SPR-2 contains I. F. amplifier, detector, video amplifier, pulse stretcher and audio amplifier and Rectifier Power Unit PP-155A/SPR-2 bandwidth 10 mc, center frequency 30 mc, sensitivity 50 microvolts for 10 milliwatts output. Power supply 80-115 V ac, 60-2600 cps 1.3 amps.

X Band Test Load, 50 watts, average power ½" x 1" waveguide. Sand load TS-108 ..... $35.00

HI POWER X BAND TEST LOAD, dissipates 280 watts of average power for ½" x 1-¼" waveguide. VSWR less than 1.15 between 7 and 10 KMC $150.00

S Band Signal Generator Cavity With Cut-Off Attenuator. 2300-2950 mc., 2C40 tube, with modulator chassis $30.00

High Pass Filter F-29/SPR-2, cuts off at 1000 mc. and below; used for receivers above 1000 mc $12.00

UPN-1 S Band Beacon Receiver-Transmitter $75.00

S Band Test Load TPS-55P, BT, 50 ohms $12.00

High Pass Filter F-29/SPR-2, cuts off at 1000 mc and below; used for receivers above 1000 mc $12.00

TS-125 CALIBRATED S BAND POWER METER with attenuator.

TS-155 S BAND SIGNAL GENERATOR and Power Meter.

S Band Mixer, tunable by means of slider, type N connector for the R. F. and local oscillator input. U.H.F. connector for the I.F. output, variable oscillator injection $30.00

TS-110 S Band Echo Box 2400-2700 mc, portable $110.00

HI POWER S BAND TEST LOAD, dissipates 1000 watts of average power, for 1½" x 3" waveguide. Range 2500 to 3700 MC.

TS-203/AP CALIBRATED SELSYN ..$10.00

GENERAL RADIO PRECISION WAVEMETER TYPE 724A, range 18 kc to 50 mc, 0.25% accuracy, V.T.V.M. resonance indicator, complete with accessories and carrying case NEW $175.00

HEWLETT-PACKARD AUDIO SIGNAL GENERATOR 205A $230.00

RADIO RECEIVER BC-967T2, 18-160 mc, 3 bands FM-AM, 110 V, 60 cps, $200.00

RADIO RECEIVER BC-969.B, 15-150 kc. $150.00

MEASUREMENTS 78E, 50-75 mc, calibrated output $100.00

FERRIS MODEL 22A SIGNAL GENERATOR, 85 kc to 25 mc, Output, 2 microvolts to 1 volt, modulation variable, good working order $175.00

FERRIS MODEL 10B SIGNAL GENERATOR, 85 kc to 25 mc, calibrated output, good working order $100.00

TS-184 Echo Box and Attenuator for APS-13.

TS-226 Peak Power Meter for APS-13.

TS-89 Voltage Divider for measuring high video pulses, ratios 1:10 and 1:100 transmission flat within 2 db 150 c.p.s. to 5 mc., with cable for attaching to syndroscope.

Waveguide Below Cut-off Attenuator L-101-A U.H.F. Connectors at each end calibration 30-100 db $10.00

FIXED ATTENUATOR PADS, 20 db ± 0.2 db DC-1200 mc, 50 ohms, VSWR 1.3 or less, 2 watts average power $30.00

WAVEGUIDE BELOW CUT-OFF ATTENUATOR, Type N connectors, rack and pinion drive, attenuation variable 120 decibles, calibrated 20-120 db, frequency range 300-3000 mc $35.00

WAVEGUIDE BELOW CUT-OFF ATTENUATOR same as above except input is matched in range of 2200-3300 mc, VSWR less than 1.2 ..... $54.00

PULSE TRANSFORMER 132-AWP .. $8.00

PULSE TRANSFORMER GE 69G, 828 G-1 $6.00

HYPERSIL CORE CHOKE, 1 Henry, Westinghouse L-422031 or L-422-32 ... $3.00

PULSE FORMING NETWORK, 20 kv., .92 micro-second, 50 ohms, 800 p.p.s. $40.00

PULSE INPUT TRANSFORMER, permalloy core, 50 to 4000 kc., WE-D161310, impedance ratio 120 to 2350 ohms .$3.00

TRANSFORMERS, 115 volts, 60 cps primaries:

1. 6250, 3250 and 200 volts, tapped primary voltage doubler, 12.5 kv, ins. $14.00
2. 6250 volts 80 ma. G.E. voltage doubler, 12.5 kv. ins. $12.00
3. 2 secondaries at 500 volts 5 amps each, at 210 pounds $50.00

W.E. NETWORKS: D-161638, D-161844, D-162627, D-162629, D-162631, D-162632, D-162624, D-162635 ..... $1.00 each

SD-3 SHIPBOARD RADAR, New and complete with test equipment $1050.00

SQ RADAR, used but in good working order, complete with antenna, control unit $650.00

SN RADAR, used, good working order, complete $550.00

UG-27/U TYPE N RIGHT ANGLE ADAPTERS 10 for $5.00; 1000 for $250.00

U.H.F. RIGHT ANGLE ADAPTER 10 for $2.50; 1000 for $125.00

ELECTRO IMPULSE LABORATORY

P. O. Box 250 Eatontown 3-0007 Red Bank, N. J.

1000 KC crystal BT cut.....$3.95
3" scope shield.....1.29
2 speed dial drive for ¼" shaft ratios 3.1 1 to 1 .39
ATC 100 mmfd air trimmer screwdriver shaft.....29
—10 +5 Weston modulation meter Weston 301. 8.95
J37 key 69
500 watt 12.5 ohm power rheostat.....3.49

R·H·S
SPECIALS OF THE MONTH

50 mmfd 5 KV GE vacuum condenser.....$1.49
2v, 6v, 12v vibrators any type.....98
Rotary switch GE Mycalex, 2 deck SPST.....39
1 mfd 5000v oil condenser Micamold.....2.98
2 mfd 3000v oil condenser Aerovox.....3.25
3 mfd 4000v oil condenser Micamold.....3.95
24 mfd 1500v DC 2KV flash. Excellent for speed lamp 3.95

TUBES!! BRAND NEW! STANDARD BRANDS! NO SECONDS! COMPARE! TUBES!!

0A3/VR75		3C24/24G	$ .39	227A/5C27		812	$2.45	8014	$19.95	0A2		5Z4		6SN7GT		12BH7			
0A4/VR150	$ 1.05	3C45/C1B	3.49			812B	6.90	8020	.89	0A4G		6A3		6SN7GTA		12SA7			
0B3/VR90	.89	3C45	12.75	240C	1.75	814	6.85	8021	3.69	0B2		6A4LA		6SR7		12SN7			
0C3/VR105	.74	3CP1	1.39	250R	5.95	815	2.25	9001	.39	0C3		6A6		6SR7GT		12SN7GT			
0D3/VR150	.68	3CP1-S1	2.25	250TH	18.95	816	2.25	9002	.32	0D3		6A7		6ST7		12SN7GTA			
1B22	2.95	3DP1	3.50	250TL	18.95	826	1.05	9003	.49	0A4		6A8		6ST7GTY		12SQ7			
1B23	8.75	3DP1A	3.95	274A	9.50	826	.39	9004	.34	1A4P		6A8G		6ST7		12SR7			
1B24	4.95	3DP1-S2A	4.75	274B	11.95	828	9.95	9005	1.49	1A5GT		6A8GT		6T7G		14A5			
1B26	2.95	3E29A	.98	304TH	6.95	828B	9.95	9006	1.95	1A6		6AD7G		6U5G		14B6			
1B27	24.50	3E29	9.95	203A	2.98	829B	9.95	12A	9.95	1A7GT		6AE5GT		6U5GT		14C5			
1B32	1.79	3GP1	1.19	300B	3.95	832	3.95	12A6	6.75	1A7GT		6AF6G		6U7G		14E7			
1B32	1.79	3GP1	4.45	300B	9.95	832A	4.95	12AH	7.95	1B3/8016		6AG5		6U7GT		14F7			
1B35	24.95	3HP1	3.65	304TH	7.95	832A	7.95	12J	6.45	1B4		6AG7		6V6		14H7			
1B38	32.50	4.05A	14.21	304TL	1.29	833A	32.95	12Q7GT	1.49	1B3/25S		6AH6		6V6GT		14N7			
1N21 Xtal	.59	4-125A	26.95	305A	24.95	836A	1.25	CK502AX	2.95	1B7GT		6AK5		6V7G		14R7			
1N21A Xtal	.89	4-250A	29.95	307A	RK72 6.95	837	1.35	CK503AX	2.95	1C4GT		6AK5		6X4		14R7			
1N21B Xtal	1.39	4AP10	3.95	310A	6.95	838	2.35	CK504AX	2.25	1C6		6AL5		6X5GT		25A			
1N22 Xtal	.89	4DP1-S2A	4.75	311A	.49	841	.37	CK505AX	2.25	1C7G		6AL5		6Y6G		25A6GT			
1N23 Xtal	.79	4H24 EL3C	4.75	323A/B	24.50	842	2.25	CK506AX	2.25	1D5GP		6AQ5		6Y7G		25L6GT			
1N23A Xtal	.79	4H25 6CW	7.50	327A	SC27 2.49	845	3.75	CK511AX	2.25	1D7G		6AR5		6Z3		25Z5			
1N23B Xtal	2.95	4H28 200D	4.00	350A	12.95	849	29.50	CK512AX	8.45	1D8GT		6AS5		6Z4		25Z6GT			
1N27 Xtal	1.69	4H28	2.95	351A	12.95	851	13.95	CK513AX	.15	1F5GT		6AT6		6ZY3G		25Z6GT			
1N34 Xtal	.79	4H29	9.95	354C	1.98	860	6.25	CK514AX	6.25	1F6		6AT6/XXL		7A5		26			
1N34A Xtal	.85	4C27/CV92	....	356B	1.69	865	6.95	1A3	.29	1F4		6AU5		7A7		26D7			
1P25	3.95		49.50	368AS	2.39	801	10.95	1A4P	.69	1F5G		6AV6		7A8		31			
1P24	4.95	4C35	22.50	371A	.79	803	2.25	1A5GT	.79	1F6GT		6BA6		7A8GT		32			
1P36	2.69	4D22	9.95	371B	.39	805	1.45	1A6	7.95	1G6GT		6BC5		7AF7		32L7GT			
1P21	13.95	4D32	12.95	703A	1.95	807	1.45	1A7GT	2.95	1H4GT		6BE6		7B4		33			
2AP1	4.95	4E27/257B	....	703A	3.49	808	1.05	1B3GT	1.35	1H5GT		6BF5		7B5		34			
2AP1A	4.95		14.95	704A	5.49	809	1.49	1C6	49.50	1H6GT		6BG6		7B6		35/51			
2C21/RK34	.35	5AP1	1.79	705A	8.95	810	26.50	1D5GP	49.50	1J6GT		6BH6		7B7		35Z5			
2C22/7193	.19	5AP4	1.79	713A	2.95	814	1.25	1D7G	8.45	1L4		6BN6GT		7C4		35Z5GT			
2C26	2.25	5BP1	2.39	715A	2.25	826	1.39	1D8GT	2.25	1L5G		6BN8		7C5		35W4			
2C34/RK34	.27	5BP4	2.39	446B	1.79	828	1.69	1E5GT	1.25	1L6		6BQ6GT		7E5		35Y4			
2C40	24.50	5CP1	1.39	450TH	16.95	834	1.39	1F4	12.95	1LA4		6BQ7		7F7		35Z3			
2C40	3.45	5CP7	3.49	450TL	44.50	837	1.39	1F5G	8.95	1LB3		6C4		7H7		35Z4GT			
2C43	8.95	5C22	49.50	527	9.75	842	3.39	1F6	8.95	1LC6		6C5		7J7		35Z5			
2C44	18.95	5EP1	1.39	572	.98	843	2.95	1F6GT	8.95	1LD5		6C6		7K7		36			
2C46	6.95	5FP7	1.19	592	97.50	845	7.95	1G4GT	8.95	1LE3		6C8G		7N7		37			
2C47	9.95	5HP1	2.69	703A	11.95	849	1.49	1G6	6.95	1LH4		6C8GT		7S7		38			
2C51	1.25	5JP1	24.45	707A	2.95	860	1.49	1G6GT	.69	1LH4		6C8G		7W7		39/44			
2C52	1.19	5JP2	8.95	723A	2.69	861	1.49	1J6GT	.69	1LN5		6D6		7X7		41			
2C53	4.89	5JP4	24.45	723B	3.95	872	1.49	1K5GT	1.85	1N5GT		6D7		7Y7		42			
2C26	3.39	5JP7	12.95	724A	1.05	878	.79	1K6GT	14.95	1P5GT		6F6		7Z7		43			
2C31	12.95	5LP1	99.50	726B	24.95	879	3.59	1L4	14.95	1P5GT		6F6GT		7Z7/44		45			
2121A	7.95	5LP1	11.95	726C	18.95	885	.24	1LB4	19.95	1R4		6F7		7W7		41			
2J22	6.50	5UP1	2.49	730C/T	18.95	954	.24	1LC5	.79	1R5		6F8G		7Y7		42			
2J26	6.50	5V4G	1.98	730C/T	42.50	955	.24	1LD5	.79	1R4		6G6G		7Y7		43			
2J27	10.95	6C21	18.95	730C/T	42.50	957	.22	1LE3	.79	1S5		6H6		7W7		45			
2J31	30.50	6F4	5.79	730A	14.95	958	.22	1LH4	37.50	1T4		6H6GT		7Z7		45Z3			
2J31	8.49	6J4	4.59	730A	3.59	959	.22	1LN5	6.95	1T5GT		6J5		7Y4		45Z5			
2J32	18.95	7BP7	4.49	731A	10.75	991	NE16 .22		ML101	49.50	1U4		6J5GT		7Z4		46			
2J32	18.95	7DP7	8.95	710A/B011	.85	1611	1.49		RK20	7.95	1V		6J6		12A		48			
2J34	18.95	9JP1	8.95	711A	1.95	1612	.49		RK29	7.95	2A5		6J7		12A6		49			
2J35	97.50	10BP1	19.95	715A	3.50	1613	1.49		RK39	4.15	2A6G		6J7GT		12A7		50A5			
2J37	12.75	10JP1	3.49	715A	6.49	1616	.24		RK53	.24	2A5		6K5GT		12AH7GT		50B5			
2J38	9.95	10KP4	18.95	715B	8.85	1619	.24		RK54	.24	2A7		6K7		12AU7GT		50C5			
2J39	19.95	10P4	17.95	715C	22.45	1620	1.49		RK56A	14.95	2B7		6K8		12AL5		50L6GT			
2J40	24.50	10	.25	717A	.55	1624	.98		RK59	1.49	2B7		6L5G		12AT6		50Y6			
2J47	49.50	12DP7	11.95	721A	24.50	1625	.24		RK60	24.50	2V3G		6L6		12AT6		53			
2J48	15.75	12DP7	12.75	722A	2.95	1626	.24		RK72	.59	2X2		6L6G		12AT7		56			
2J49	39.50	12HP7	10.75	723A/B	12.95	1629	.24		RK73	.59	2X2A		6L6GA		12AU6		57			
2J50	22.50	12J1P4	22.50	725A/B	12.95	1630	.24		RK81A	2.39	3A4		6L7		12AU7		58			
2J54B	22.95	15E	1.19	724B	2.69	1631	.85		RK120	9.95	3A5		6L7G		12AV6		59			
2J55	11.95	15J	1.19	724C	6.45	1632	.85		RK200	4.95	3A6		6N7		12BA6		70L7			
2J61	24.50	16AP4	42.50	726A	4.95	1633	.69		VR75	.29	3B7/1291		6Q7		12BE6		71A			
2J62	42.50	16CP4	42.50	726B	29.50	1634	.75		VR91	1.10	3D6/1299		6S7		12C8		75			
2K25	19.75	19T8	.87	726C	49.50	1635	.75		VR105	.69	3LF4		6S8		12E5GT		76			
2K28	24.95	20P1	.39	730A	8.95	1638	.65		VT127A	1.98	3Q4		6S8GT		12H6		78			
2K29	24.50	20P3	24.50	730B	7.95	1644	.98		VT198	14.95	3Q4GT		6SA7		12J5GT		80			
3AP1	4.59	AC/SPEC	.25	800	1.69	1654	2.39		VU29	14.95	3S4		6SC7		12J7GT		82			
3B22/E1SC	4.85	45 SPEC	5.95	801A	2.95	1665	1.19		VU111	.49	5V4		6SD7GT		12K7GT		83			
3B23/RK22	4.85	45 SPEC	.19	802	3.89	1851	.89		W14GS	3.95	5R4GY		6SF5		12K8		84/6Z4			
3B24	1.59	45A	5.95	803	2.10	1852	.89		W14GT	3.95	5T4		6SF5GT		12Q7		85			
3B24W	1.79	70TL	3.95	804	6.45	1903	4.99		W14GTA	12.75	5U4G		6SH7		12SA7GT		80Y			
3B25	4.39	100R	.89	805	3.65	1961	4.99		W15GT	1.75	5U4G		6SK7		12SC7		117L7/M7			
3B26	1.49	100TH	9.95	806	29.95	2050	1.19		W15GT	1.89	5V4G		6SL7GT		12SF5		117N7			
3B27	1.95	203A	5.95	807	1.49	2051	.39		W16GT	.89	5W4		6SN7GT		12SH7		117P7			
3B28	7.95	211	.39	808	1.29	8005	4.99		W16GT	37.50	5X4G		6SN7GTA		12SJ7		117Z3			
3BP1	2.59	212E	49.50	809	2.25	8011	.49		W16GT	18.95	5Y3GT		6SR7		12SK7		117Z6			
3C22	39.50	215A	.19	810	9.95	8012	1.25		W16GT	34.50	5Y4G		6SR7GT		12SN7					
3C23	9.95	217C	6.75	811	2.10	8013	1.39		W16GT	22.50	5Z3		6SL7GT		12SR7					

DUE TO THE CURRENT NATIONAL EMERGENCY AND THE CRITICAL RECEIVING TUBE SHORTAGE, TUBES WILL BE SHIPPED AT PREVAILING PRICES.

SELENIUM RECTIFIERS
FULL WAVE BRIDGE TYPE

Input 0-20V AC Type No.	Current	Output 0-14.5V DC Price
20D1	1.2 Amps.	$ 2.49
20E1	2.4 Amps.	3.49
20F1	4.0 Amps.	4.95
20K1	13.0 Amps.	8.95
20J1	17.5 Amps.	11.95
20K2	26.0 Amps.	17.95
20K3	39.0 Amps.	24.95
20K4	52.0 Amps.	29.95
20K5	65.0 Amps.	35.95
0-40v AC	**Current**	**0-34v DC**
40D1	.6 Amps.	$ 2.95
40E1	1.2 Amps.	3.89
40F1	1.2 Amps.	5.25
40J1	3.2 Amps.	9.95
40J1	4.0 Amps.	12.95
40K1	10.0 Amps.	18.95
40J2	18.0 Amps.	22.45
40K4	24.0 Amps.	32.50
40K5	30.0 Amps.	34.95
40J4	36.0 Amps.	39.50
0-120v AC	**Current**	**0-100v DC**
80D1A	.6 Amps.	$ 7.95
80E1A	1.2 Amps.	10.50
80F1A	3.2 Amps.	16.95
80J1A	6.4 Amps.	24.75
80J2A	9.0 Amps.	32.95

CENTER TAPPED RECTIFIERS
Single Phase Full Wave Bridge

10-0-10v AC	Current	0-8v DC
10D1	1.2 Amps.	$ 1.89
10E1	2.4 Amps.	2.95
10F1	6.4 Amps.	3.87
10J1	12.0 Amps.	4.95
10J1	16.0 Amps.	7.95
10K2	24.0 Amps.	10.75
10K3	32.0 Amps.	14.75
10K4	48.0 Amps.	17.75
10K5	60.0 Amps.	19.95
10K6	72.0 Amps.	25.57
10K7	84.0 Amps.	29.95
10K8	96.0 Amps.	32.50
10K10	120.0 Amps.	42.50

Let us bid on your special selenium rectifier wants in any quantity

TRANSFORMERS—115V 60 CY
HI-VOLTAGE INSULATION

6350v or 3850v or 2600v @ .056 amps.....$13.98
2700v @ 2 MA; 6.3v @ 6A; 2.5v @ 1.75A.....4.95
2700v @ 4 MA.....6.95
1600v @ 4 MA; 350-0-350v @ 150 MA; 6.3v @ 9A.....4.45
1540v @ 5 MA; 340-0-340v @ 300 MA.....4.35
1120-0-1120v @ 500 MA; 12v CT @ 11A; 2.5v @ 10A; 117v @ 2.5A; 60 cy @ 1 MA; 115/230 PRI.....10.95
925-0-925v @ 110 MA; 525-0-525v @ 60 MA; 2X5v @ 3A; 6.3v CT @ 3.6A; 6.3v @ 2A; 6.3v @ 2A.....7.95
700-0-700v @ 300 MA.....7.95
500-0-500v @ 175 MA.....4.85
450-0-450v @ 200 MA; 6.3v CT @ 6.3A; 5v @ 6A.....4.85
425-0-425v @ 75 MA; 6.3v @ 1.5A; 5v @ 3A.....3.65
410-0-410v @ 60 MA; 5v CT @ 2A; 5v @ 2.25A; Dual Pri.....4.97
405-0-405v @ 150 MA; 6.3v CT @ 2½A; 5v @ 3A; 2.5v CT @ 5A.....4.35
400-0-400v @ 100 MA; 6.3v CT @ 2½A; 5v @ 3A; 6.3v @ 1.2A; 117v @ 60 cy @ 1 MA.....5.35
500-0-500v @ 185v @ 200 MA; 3x6.3v @ .6A; 5v @ 3A.....4.75
18 or 20v @ 2A; 9v @ 2A; 115v 60 cy.....4.25
12.6v CT @ 10A; 11v CT @ 6.5A.....2.17
7.5v CT @ 7A.....6.38
6.3v @ 15A; 2.5v @ 2A.....$2.29 4.0-4v @ 1A.....1.77
6.3v @ 10A; 6.3v @ 6A.....2.87
6.3v @ 6A; 6.3v @ 3A; 2.5v @ 1.75A.....2.77
6.3v @ 3A; 2.5v @ 2A.....1.87
6.3v @ 3A; 2x6.3v CT @ 3A.....2.97
6.3v @ 1.5A; 6.3v @ 1A.....1.95
.6v @ 15A RMS.....1.47

TRANSFORMERS—220v 60 Cys

512.5-0-512.5 @ 427 MA.....$ 9.38
5x5v @ 6A; 2.5v @ 2A.....2.95
6x6.3v CT @ 3A; 6.3v CT @ 1.6A.....2.95
10v CT @ 6.5A; 6.3v CT @ 2.5A; 6.3v CT @ 1.8A 220/440 Pri CT @ 2A.....3.95
Step Up/Down 110/220, 500 watt.....10.95
Step Up/Down 110/220, 220/440 600 watt.....14.95

EQUIPMENT SPECIALS

APN-1 Altimeter Tester	Like New	$ 7.95
ATN Inverter 12v DC in 110v AC Out 125 w Int. 400 w Cont.	New	14.95
AN/ARW-2 UHF Receiver	New	49.95
BC357 Beacon Receiver	Good	3.45
BC433 Receiver	Good	24.94
BC450 Modulator	Good	1.98
BC434A Control Box/BC433	Used	1.95
BC458 Transmitter	New	8.95
BC602A Control Box/SCR522	Used	.39
BC778 Gibson Girl	Good	3.95
BC958-121 Xmitter 100-156 MC	New	39.50
BC1016 Tape Recorder	New	499.50
BC1206A Beacon Receiver	Good	4.95
CF1 Navy Unit w/200KC Crystal	New	14.95
DM 19 Dynamotor 12v DC in 500v 200 MA Cont. Out	Good	4.95
EE8 Foundation Unit	Good	4.95
MN26C Compass Receiver	Good	24.95
M110 Dynamic Chest Mike	New	3.95
PE94 Dynamotor SCR522	Good	1.98
PE97A Vibrator Power Supply	New	6.95
PE104A Vibrator Supply	Excellent	24.95
R89/ARN5 Receiver	New	9.95
R89/ARN5 Receiver Less Tubes, Covers	Good	4.95
SCR518 Altimeter Complete	Used	39.95
T17 Carbon Mike	New 1.98 Used	1.29
TU25 Tuning Unit/BC223	New	1.79

FILTER CHOKES HI V INS

.025 HY @ 1.36A.$1.98
.05 HY @ 15A.. 7.95
.065 HY @ 2.5A.. 2.49
.1 HY @ 6.95
2 HY @ 175 MA.. 1.49
3 HY @ 50 MA.. .39
3 HY @ 250 MA.3.65
5 HY @ 70 MA.. 2
5 HY 350 MA Dual 2.39
5.3 HY @ 775 MA 9.95
10 HY @ 55 MA.. 2.98
10 HY @ 100 MA.. 1.49
10 HY @ 200 MA $2.19
10 HY @ 85 MA 1.49
13 HY @ 130 MA.. 1.95
15 HY @ 250 MA.. 2.95
14 .5 HY @ 40/400 MA.... 6.98
15 HY @ 25/ MA.. .99
15 HY @ 70 MA.. 1.19
20 HY @ 5 MA.. 1.49
200 HY @ 10 MA.. 2.95
300 HY @ 2 MA.. 2.98
600 HY @ 1 MA.. 2.95

RADIO HAM SHACK Inc.
189 GREENWICH STREET . NEW YORK, N. Y.

PHONE DIGBY 9-0347
WRITE FOR QUANTITY PRICES
Prices subject to change without notice. F.O.B. NYC, minimum order $10.00. 20% deposit required. All merchandise guaranteed.

IMMEDIATE DELIVERY • LOW PRICES • FULLY GUARANTEED

BROWN TELEPLOTTER RECEIVER



Model 791X1R
115 volt 60 cycles

Contains a pen driven by two balancing motors which writes on rear of a translucent chart. Pen arm position is in terms of two co-ordinates supplied balancing motors thru two amplifiers. Originally intended for recording plotted or written data from central plotting board. Writes at one half scale on 18 in. chart. Discriminator input circuit designed to operate unit as function of two varying R.F. frequencies varying about mean of approx. 420 KC. Further data on request. (Shipping weight 434 lbs.)

Price $375.00



Aircraft Generator Eclipse NEA-3

Output 115 VAC, 10.4 amps 800 cycles at 7480 rpm. Also, 30 VDC at 6 amps. Stock #SA-306. **Price $39.50 each.**



400 Cycle Generators

Homelite 18A120D28-1 400 cycle out at 1 phase 115 v. 39 amps. Also a d.c. output of 28 v. and 17.9 amps. **Special at $175.00 each.**



C-1 Autopilot Amplifier

Three channel servo amplifier for use in C-1 Autopilot. 7 tubes. Stock #SA-172. **Price $24.50 each.**

Pioneer Servo Motor

Type 10047-2A. 2 ϕ 400 cycle low inertia. 26 v fixed phase. 45 v. max. variable phase. Stock #SA-99. **Price $12.50 each.**

PRECISION AUTOSYN

Pioneer Type AY-150 Control Autosyn. Precision type. 26 v. 400 cycle. Stock #SA-297. **Special low price $14.50 each.**

SYNCHROS

Navy Types

1F, 1CT, 1G, 2F, 5CT, 5DG, 5HCT, 5HF, 5HSF, 5SDG, 5TG, 5U, etc.

Prices on Request

Compass Indicator

I-82F Compass Indicator. 6-360°-5 in. dial. 26 v. 400 cy. 8-12 v. 60 cy. Ideal position indicator. Stock #SA-284. **Price $6.50 each**

SWEEP GENERATOR CAPACITOR

Hi-speed bearings. Split stator. Silver-plated coaxial type. 5-10 mmf.

Stock #SA-167 **Price $2.75 each**

ALSO IN STOCK

C-1 AUTOPILOT COMPONENTS
A-5 AUTOPILOT GYROS
GENERAL ELECTRIC D.C SELSYNS
AC and DC RATE GENERATORS

400 CYCLE AC BLOWERS

E. A. D. J-151—115 v. 400 cy. 22 c.f.m.
Westinghouse Type FL—115 v. 400 cy. 17 c.f.m.

DC MOTORS

Haydon-0666, ½ rpm. 29 v. d.c. 100 ma.
Deleo 5069625—120 rpm. Gov. cont. 27 v.
General Electric 5BA50J466—½ hp. 27 v. field. Arm. v. 60. Amplidyne controlled.
Delco-A-7155—1/30 hp. 3600 rpm. Gov. cont.
W. E. KS-5603-L02—1/100 hp. 4 lead shunt.
National Mineral—90600. 1 hp. Int. duty. Fan cooled.
Diehl FDF-53-5—3600 rpm. Gov. cont. 1/20 hp.
G. E. 5BA25MJ100—24 v. 7500 rpm. Cont. duty.
Airsearch—Actuator—25800-24. 2" travel.
Barber Colman—Actuator—YLe-2066-2. 200 in-lb. 135 degrees in 45 seconds.
Airsearch—Actuator (Manual Flap) 25080.
Airsearch—Actuator—(Automatic Flap) 25040.
Holtzer Cabot—RBD-2220—½ hp. 27 v. 3600 rpm.
Arma Latitude Motor — 8413-30 (Step motor).
Elinco B-64—1/165 hp. 3100 rpm. 27 v. f. 80 v. armature. (Thyratron control)
John Oster—A-21E-12R—Split field series reversible. 28 v. 0.4 amps. 2 watts output.
General Electric 5PS56HC18—Split field series rev. 60 v. 1.4 A. 5500 rpm.

AC SERVO MOTORS

Kollsman—776-01—400 cy. 2 ϕ drag cup type.
Diehl FP-25-3—2 ϕ 60 cy. 26 v. 2.5 watts out.
Pioneer CK-2—2 ϕ 400 cy. 1.05 in/oz. stall.
Pioneer CK-17—2 ϕ 400 cy.
Minneapolis Honeywell G303AY2CA4. Built in gear reduction. 2ϕ 400 cy.

AUTOSYNS (Pioneer)

B-9A—Dual Oil Pressure Indicator (8007-4E-7A).
B-9A—Oil Pressure Transmitter. (4150-3H5).
Pioneer Types—AY-1, AY-14, AY-34, 2120-1, etc.
C-14A—Fuel Pressure Transmitter.
Pioneer I-81A and I-82A Compass Indicators.

Subfractional Horsepower AC Motors

Eastern Air Devices-J-72B—115 v. 400 cy. 1/30 hp. Cont. duty. 4700 rpm.
E. A. D. J-31—115 v. 400 cy. 1/100 hp.
E. A. D. J-69B—115 v. 400 cy. 1/250 hp.
E. A. D. J-33—115 v. 26 400 cy. Int. duty.
Diehl FBF-24-1—115 v. 400 cy. 1/100 hp.
Synchron-600—110 v. 60cy. 1 rpm.
Haydon 36228—115 v. 60 cy. 1 rpm.

MAGNESYNS

Pioneer Type CL-3—5 power.
Pioneer 1006-1E-B1 Indicator, AN-5730-2.

INVERTERS



Wincharger PU-7/AF Input 28 VDC at 160 amps. Output 115 v. 400 cy. 1 ϕ at 2500 VA. Voltage and frequency regulated. Cont. duty. Stock #SA-164. **Price $89.50 each.**



G.E. 5AS131NJ3 (PE-118) Input 26 VDC at 100 amps. Output 115 v. 400 cy. 1 ϕ at 1500 VA. PF 0.8 W.E. Spec. KS-8601L1. Stock #SA-288. **Price $79.50 ea.**

PE-218E Inverters Russel Electric and Leland. Input 28 VDC at 92 amp. Output 115 v. 400 cycles at 1500 VA. PF 0.9. Stock #SA-112A. **Price $49.50 each.**

Pioneer 12150-4-B Input 28 VDC at 14 amps. Output 120 v. 400 cy. Single Phase at 1.15 amps. (140 VA.) Voltage and frequency regulated. Made 1949. Stock #SA-304. **Price $89.50 each.**

JACK AND HEINTZ STARTER

Dwg. 6-950-B Aircraft engine starter. 28 V.D.C. Stock #SA-205. **Price $19.50 each**

DC SERVO MOTOR

Elinco Type B-64. 1/145 hp at 3100 rpm. Field volts 27.5 Max. armature voltage 80. Ideal for thyratron servo control. Stock #SA-211. **Price $12.50 each.**

MAGNETIC AMPLIFIER ASSEMBLY

Sperry 661824. Saturable reactor type output transformer. Designed to supply one phase of 400 cycle servo motor. Stock #SA 266. **Price $6.75 each**

FORD INS'T SERVO MOTOR

115 volt 60 cycle two phase low inertia motor. 15 watts output. Buffalo 267927. Stock #SA-291. **Price $49.50 each.**

Prices F.O.B. Paterson
Phone ARmory 4-3366
WRITE FOR LISTING

Servo-Tek products co.
4 Godwin Ave. Paterson, N. J.

SPECIALISTS IN FRACTIONAL HORSE POWER MOTOR SPEED CONTROL

Reliance Specials

WIRE WOUND PRECISION RESISTORS, 1% OR BETTER

¼ WATT—25c

6.68Ω	12.32Ω	16.37Ω	125Ω	414.8Ω
10.48	13.02	62.54	147.5	705
10.84	13.52	79.81	220.4	2193
11.25	13.89	105.8	301.8	59,148
11.74	14.98	123.8	366.6	100,000

½ WATT—25c

250Ω	1.53Ω	79Ω	260Ω	4,000Ω	8,500Ω
334	2.04	90	270	4,451	14,925
444	11.1	97.8	298.3	5,000	15,000
502	13.15	100	400	5,900	15,750
557	18.75	125	723.1	6,500	17,000
627	46	180	2,500	7,000	30,000
76	52	210	2,850	7,500	37,000
1.01	55.1	235	3,427	8,000	79,012
					100,000

1 WATT—30c

1.01Ω	5.21Ω	270Ω	9,000Ω	55,000Ω
2.58	10.1	3,300	18,000	65,000
3.39	10.9	7,000	20,000	60,000

1 WATT—40c

100,000Ω	125,000Ω	320,000Ω	600,000Ω
120,000	130,000	522,000	700,000

1 Megohm—1 Watt 1%—65c; 5%—40c

Orders for 100 precision resistors—

10% Discount

SELSYNS

115 V., 60 Cyc.
=C78248
3⅝" dia. x 5⅝" long
$8.50 pair

Mounting Brackets — (Bakelite) for selsyns and differentials shown above..... 35c pair

DIFFERENTIAL

115 V., 60 Cyc.
=C78249
3⅝" dia. x 5⅝" long
$2.95 ea.

Used between two =C78248's as dampener. Can be converted to 3600 RPM Motor in 10 minutes. Conversion sheet supplied. (Converted)..... $3.50

CAPACITORS

POSTAGE STAMP MICAS

MMF	MMF	MMF	MMF	MMF	MFD	MFD
5	43	100	290	580	0013	0051
5.2	47	110	300	600	00136	006
10	50	120	330	620	0015	0062
15	51	125	350	680	001625	0065
20	56	130	370	750	002	0068
22	60	150	390	800	0025	007
24	62	160	400	820	0026	0075
25	68	175	430	910	0027	008
30	75	180	470	MFD	003	0082
35	82	200	500	001	0033	009
39	85	220	510	0011	0047	01
40	90	240	560	0012	005	

Price Schedule

5 MMF to .0011 MFD..... 5c
.0012 MFD to .002 MFD..... 7c
.0023 MFD to .009 MFD..... 12c
.01 MFD..... 18c

SILVER MICAS

MMF	MMF	MMF	MMF	MMF	MMF	MFD
10	50	120	270	466	800	00282
18	51	125	300	470	815	002826
20	60	130	325	488	820	003
22	62	150	330	500	875	0032
23	66	180	360	510	MFD	0039
24	68	200	370	525	001	005
30	75	208	390	560	.001625	0051
33	82	225	400	660	0022	0056
39	100	240	410	680	0023	006
40	110	250	430	700	0024	0068
45	115	260	450	750	0027	0082

Price Schedule

8 MMF to .001 MFD..... 10c
.0012 MFD to .0027 MFD..... 20c
.00282 MFD to .0082 MFD..... 50c

OIL FILLED

MFD	V. D. C.	Price	MFD	V. D. C.	Price
0.25	20,000	$15.75	1	2,000	$.95
.03	16,000	1.95	3	1,000	.80
.375	16,000 and		2	1,000	.65
.75	8,000	5.95	1	800	.59
.1	7,500	1.55	4	600	.79
.1-.1	7,000	1.55	2	600	.39
.01	6,000	.95			
.03-.03	6,000	1.25	2 mfd		
.02-.02	7,000	1.25	4,000		
.1	6,000	5.25	V.D.C.		
.2	4,000	2.25	G.E.		
.25	3,000	1.49			
.2	750 AC	.49	SPECIAL		
.8	2,000	4.85	**$2.25**		
4	2,000	3.95			

UNIVERSAL JOINT
3/16" hole x 3/8" O.D.
1 1/8" long
Steel or Aluminum
50¢

JONES BARRIER STRIPS

Type	Price	Type	Price	Type	Price
2-140Y	$0.10	4-141¾W	.25	3-142	.17
3-140¾W	.15	5-141	.22	3-142Y	.23
4-140Y	.19	5-141¾W	.36	4-142¾W	.30
6-140	.20	5-141Y	.30	5-142	.26
9-140¾W	.40	7-141	.29	5-142¾W	.37
10-140¾W	.44	7-141¾W	.41	10-142¾W	.71
11-140¾W	.48	7-141Y	.41	11-142Y	.78
12-140¾W	.53	8-141	.33	14-142	.68
13-140	.40	8-141¾W	.47	2-150	.31
14-140Y	.40	9-141¾W	.52	2-150¾W	.38
2-141	.10	9-141Y	.52	3-150	.44
3-141¾W	.19	10-141Y	.58	4-150	.57
3-141W	.19	15-141Y	.85		
4-141W	.25	17-141Y	.96		

METERS

Brand New—Guaranteed

0-1 Amp. RF, 2½"	$3.29
0-300 V. D. C. 2½"	3.50
0-500 Microamp. 2½"	3.85
0-7.5 V. A. C.	3.46

VERNIER DRUM (From BC-221)

0-10 to 140. Black with silver marks..... 85c

VERNIER DIAL (From BC-221)

2 ¾" Dia. 0-100 in 360°. Black with silver marks. Has thumblock..... 85c

3AG FUSES

AMP	Per 100	AMP	Per 100	AMP	Per 100
⅛	$4.00	1	$2.50	5	$2.50
¼	4.00	1½	2.50	10	3.00
½	4.00	2	2.50	15	3.00
¾	4.00	3	2.50	20	3.00

Fuse Holder—for 3AG Fuse. (Littelfuse or Buss)..... 25c

4AG FUSES

AMP	PER 100	AMP	Per 100	AMP	Per 100
1/10	$4.00	2	$2.00	10	$2.50
1/4	3.50	3	2.00	20	2.50
1/2	3.50	3.2	2.00	25	2.50
1	2.00	5	2.00	30	2.50

Fuse Holder—for 4AG Fuse. (Littelfuse or Buss)..... 18c

Wrapped—BALL BEARINGS—New

Mfg	ID	OD	Width	Price
Fafnir 33K5	3/16"	1/2"	5/32"	$0.25
MRC 205A	63/64"	2 3/64"	19/32"	1.10
N.D. 5202C13M	1/2"	1 3/8"	1/8"	1.00
Fafnir 2308W	1 37/64"	3 9/16"	5/16"	2.00
SKF466438	6"	8"	1"	5.00
Fafnir 545	2 1/16"	2 5/8"	15/32"	1.00

NEEDLE BEARINGS

B108 1/2" wide	5/8"	13/16"	30¢
GB34X 1 4" wide	3 16"	11/32"	25¢

ALLEN SET SCREWS

4-40 x 1/8	8-32 x 1/8	8-32 x 5/16
4-40 x 3/16		8-32 x 3/8
ALL SIZES		**$1.50 per 100**

HAYDON TIMING MOTOR

4 R.P.M., 115 V., 60 Cycle..... $1.79

SOUND POWERED HANDSET

Brand New!

Includes 6 ft. cord. No batteries or external power source used.

$8.92 ea. — $17.60 pr.

CERAMICONS

2 MMF	20 MMF
5.6	36
10	39
12	45
15	62
18	82
20	150
22	200

$6.50 per hundred

500 Volt Ceramic Condensers

MMF	MMF	MMF	MMF
2	15	62	150
3.11	22	68	180
4	27	82	200
5	30	91	220
12	51	100	270
13	56	110	330
15	47	115	1,000
16	60	140	

$5.00 per hundred

PRECISION CAPACITOR—W.E.

D-161270, 1 mfd @ 200 VDC..... -40° to +65°C..... $8.50

SELENIUM RECTIFIERS

Full wave—200 ma., 130 V. in, 115 V. out..... $1.57
Half wave—100 ma., 130 V. in, 115 V. out..... .72

TIME DELAY RELAY

Raytheon CPX 24166 KS 10193-60 Sec. • 115 V., 60 Cycle • Adj. 50-70 Seconds • 2% second resetting time—spring return • Micro-switch contact, 10A • Holds ON as long as power is applied • Fully cased •

ONLY $6.50

DELAY NETWORK—ALL 1400Ω

T 113—Approx. 1.2 micro sec. delay..... 85c
T 114—Approx. 2.2 micro sec. delay..... 85c
T 115 Similar to T 114 with tap brought out..... 85c

Get On Our Mailing List!

COAXIAL CABLES

GUARANTEED!! NEW!!

	Ohms	Price per 1,000 ft		Ohms	Price per 1,000 ft
RG-5/U	53.5	$270	RG-29/U*	53.5	$70
RG-6/U	76	150	RG-34/U	71	175
RG-7/U*	97.5	65	RG-35/U	71	450
RG-8/U*	52	65	RG-37/U	55	40
RG-9/U*	51	135	RG-39/U	72.5	100
RG-10/U	52	125	RG-41/U	67.5	550
RG-15/U	76	160	RG-54/U	58	65
RG-18/U	52	450	RG-54A/AU	54	75
RG-21/U	53	100	RG-55/U	53.5	65
RG-22/U*	95	110	RG-57/U*	95	100
RG-24/U	125	240	RG-58/U*	53.5	55
RG-25/U	48	525	RG-74/U	52	250
RG-26/U	48	75	RG-77/U*	48	100
RG-27/U	48	290	RG-78/U	48	80
RG-28/U		168			

*No minimum order—others 250' minimum
Add 25% for orders less than 1,000 feet

COAXIAL CABLE CONNECTORS

Angle Adapter	Plug	Socket	Head
15¢	40¢	40¢	9¢
M-359	PL-259A	SO-239	83-1H
83-1AP	83-1SPN	83-1R	

Adapter for PL-259 A for use on small coax
12¢ each..... $10.00 per 100

S3-1AC	$0.42	UG-21/U	.67	UG-85/U	.88
83-1J	.80	UG-22/U	.86	UG-87/U	.79
S3-1RTY	.45	UG-23/U	.85	UG-102/U	.60
83-1SP	.45	UG-24/U	.67	UG-103/U	.60
83-1T	1.12	UG-25/U	.60	UG-104/U	.88
S3-22AP	1.10	UG-27/U	.68	UG-167/U	2.00
83-22F	1.68	UG-29/U	.83	UG-171/U	1.35
83-22R	.68	UG-30/U	1.79	UG-178/U	.18
83-168	.18	UG-33/U	14.80	UG-176/U	.18
83-185	.18	UG-34/U	16.00	UG-197/U	1.35
UG-7/AP	2.14	UG-36/U	12.80	UG-206/U	.60
UG-12/U	.63	UG-37/U	12.80	UG-255/U	1.22
UG-13/U	.63	UG-58/U	.63	UG-264/U	1.74
UG-18/U	.63	UG-59/U	.60	UG-281/U	.60
UG-19/U	.73	UG-61/U	.60		

FILAMENT TRANSFORMER

Pri., 115 V., 60 Cyc.—Sec., 5V., 115 A. 6000 volt Insulation..... $9.95 each

FILAMENT TRANSFORMER



Amertran Type WS

For High Voltage Rectifiers.
PRI. 115V., 60/60 Cycle.

SEC. 5V., C/T @ 10 Amp.

25 KV R.M.S. Test 12 KV D.C. Operating. Uses 372 Tube or other tubes.

NEW OVERSEAS PACKED **$10.95**

872-A Tube..... **$1.88**

PULSE TRANSFORMERS

X 124 T2, UTAH, marked 9262, 9340, small gray case (Ratio 1:1), hyperal core..... $2.75
D161310, 50 Kc to 4 Mc, 1⅝" dia. x 1⅝" high, 120 to 2350 ohms..... $1.50
352-7178—Spec. 10, 111 Chicago Trans. equivalent to 9262 (above)..... $1.50
D-166638 W. E. Permalloy core, Semi-toridal windings..... $1.25
K98800, Ratio, 1:1:1, 2:1, Freq. range 380 to 520 C.P.S..... $3.50
D106173, W.E. Freq. resp. 10KC to 2 MC..... $9.00
600 KVA G.E. #2731, 28,000 Volt peak output: Ribbon core microsecond pulse width..... $28.50

PRECISION CONTROLS

6 WATT

20,000Ω	Muter 314A	$1.70
6,000	De jur 290	1.70
6,000	Muter 314A	1.70
5,000	Muter 314A	2.50
2,000	De jur 290	1.70

12 WATT

10,000	Muter 471A	$2.00
10,000Ω	De jur 271T	2.00
5,000	De jur 271T	2.00
100K	GR 471A	2.75

4 WATT

200Ω	GR	301	$1.25
500Ω	Centralab	48-501	1.00
50	De jur	292	1.00
20	De jur	292	1.00
12	GR	301	1.10
12	De jur	292	1.00
2	GR	301	1.25

2J1G1 SELSYNS

BRAND NEW
400 Cycle
Can be used on 24 V.D.C. or 110 V.A.C.

$1.65

Minimum Orders $3..... All orders f.o.b. PHILA, PA.

RELIANCE MERCHANDIZING CO.

Arch St. Cor. Croskey Phila. 3, Pa. *Telephone RIttenhouse 6-4927*

Exceptional Values From

AMERICA'S LARGEST ELECTRICAL CONVERSION HOUSE

ALLIS-CHALMERS MOTOR GENERATORS

Input: 115 VDC at 14 amp. 3000 RPM. Ball Bearings. Output: 1.25 KVA, 60%, PF 120 Volts, AC, 1 Ph, 60 cyc, 10.4 amp. Centrifugal automatic controller for field rheostat operation. Fully enclosed. **Brand New $99.95.** Also available for 230 VDC operation at the same price.

FLEXARC TRANSFORMER TYPE WELDER

Operates at 440-550, single phase, 60 cycles, 300 ampere adjustable output. Rebuilt like new.

SPECIAL PRICE $119.75

General Electric Type B Flange Motor for hoisting duty. 5⅞ H. P. separately excited. Marine Duty. Brand New, original cases. 230 Volts, DC. 1100 RPM. $65.00

GE Relays: 110 VAC, 10 Amp. 60/50 cy. in steel case. 2" x 3" x 4½". $3.90

Shaded Pole Motor with gear train on mounting bracket. 110 VAC. $1.65

ONAN 400 CYCLE MG SETS: Operative at 110-220 VAC, 1 Ph, 60 cyc. belted to alternator rated 1.5 KVA, 115 V, 1 Ph, 800 Cy. $231.00

Above unit with 220-440 3 Ph motor. $227.00

ONAN 500 CYCLE MG SETS, 4 KVA. Operative with 110-220 VAC, 1 Ph, 60 Cy. Motor, rep-ind. Output single ph. $450.00

With 3 Ph, 220-440 Motor. $395.00

Westinghouse Transformer Controller contains 500 watts 120-220 volt transformer with multi-taps. The transformer with tap switch alone is worth more than the special price. $6.25

ELECTRIC SPECIALTY DC TO DC MG UNITS

Operate at 220 Volts, DC to deliver 110 Volts, 2.5 Amperes. Two of these units can be used in series to obtain 110-0-110 Volts DC. Special Price $15.54

HOLTZER-CABOT 153F

Input 28 Volts DC at 52 Amp. Output 115 Volts, 850 cps, 1 phase, 1.0 KVA. 3 P. F. also secondary output of 26 Volts, 400 cycles, single phase at 250 va. voltage and frequency regulated. **REBUILT LIKE NEW. $59.50**

HOLTZER-CABOT MG149F

Input 24 Volts DC at 16 amps. Output 26 Volts at 250 V. A. 400 cps and 115 Volts at 500 V. A. 400 cycles. Rebuilt like new. $24.75

ESCO CONVERTERS

Rebuilt like new. Input: 80 VDC 2.85 amp. 3600 R.P.M. Output: 115 VAC 2.18 amp. 60 P.F. Ball Bearings. Base for table or side mounting. Special $9.80

ESCO DC AC MG SETS. Motor: 115 Volts, 3 hp HP. Has start-built-in voltage regulator, frequency control. Rebuilt. Ideal for operation, where an appreciation in operating current voltage and frequency. Brand New. $120.00

MARATHON MOTOR GENERATORS

Input: 110 VDC Output: 110VAC 1 phase, 60 cy. 500 VA. Marine Type with voltage regulator and frequency controller.

Rebuilt $75.00

same unit as above with 32 VDC Input and same output. 500 V A $64.00

GEN. ELECTRIC AMPLIDYNES

Model 5AM78AB47: 750 watts. Input: 440-3-60; Output: 250 Volts, DC; 3 amperes; 3450 RPM. $185.00 Coupled directly to control motor on common base. Model 5AC78AM189: 60 volts, D.C. 12.5 amp. Special $255.00

Model 5AM78AB50A: 1500 watts input 440-3-60. Output 250 Volts, DC, 6 amperes; 3450 RPM. $225.00

Model 5AM78AB10. Input: 32 VDC, 60 amp. 2 H.P. 2200 RPM. output: 250 Volts, D.C., 4 amperes, 750 watts. $165.00

Model 5AM45DB29: Input: 115 Volts, single phase, 60 cyc. 5 Amps. Output: 230 Volts, D. C., 6 amp. 1500 watts. 1450 RPM $58.50

Model 5AM49AB30: Input: 440 Volts, 3 phase, 60 cyc. 1 amp. output: 115 Volts, D. C. 3.25 amp. 1450 RPM $78.50

Model 5AM49AB1: Input: 440 Volts, 3 ph. 60 cyc. 1 amp. Output: 230 Volts, D. C. 1.5 amp. 375 watts. $88.00

Model 5AM71AB58: Input: 110-220 volts, single phase, 60 cyc. Output: 250 Volts, D. C. 1.5 amp. 375 watts. 1450 RPM $78.00

Model 5LY112A1: Input: 440 Volts, 3 ph. 60 cyc. 2.5 H.P. 7 amps. 3550 RPM. Output: 105 Volts, D. C. 15 amp. 1.5 K. W. $225.00

Model 5AM61DA10: Amplidyne Generator. 3 K.W. 125 Volts, DC. 24 amp. 1150 RPM. HP. $160.00

General Electric Synchronous Motor or Alternator: excitation 2 Volts; operating at or delivering 110 volts, 3 phase, 60 cycles at 1800 speed; no name plate, but lab tests determined specs as above. $9.50

General Electric Type B Flange Motor for hoisting duty. 5⅞ H. P. separately excited. Marine Duty. Brand New, original cases. 230 Volts, DC. 1100 RPM. $65.00

HERE IS EXCEPTIONAL VALUE

Robbins and Myers Motor Generator Units. Operate at 110 Volts, AC, single phase, 60 cyc. and deliver 12.40 Volts, DC. Can be used with field rheostat to supply 24-28 VDC for the operation of servo equipment from lighting line. Rated at 40 watts but will deliver 200 watts for intermittent operation. Gear head built into one end rotates external shaft at 225 RPM. An exceptional value at $18.75 each. With field rheostat $20.00. Also available for operation at 115 VDC at $12.50 and with rheostat at $14.75 each. Both units have 1/4 HP Motor. Stock up on these sets while they are available. Special price on quantity. Rebuilt.

TAPE WINDERS

These tape winders consist of a motor, operative at 110 volts, D. C., 6 amperes; 180 speed. A motor which is separable from the rest of the unit and which can be employed for a multitude of purposes, alone or with the gear reduction box to which it is connected. Motor is shunt wound and the speed thereof is controlled by a built-in rheostat. This makes an invaluable laboratory unit. Special Price $10.99

Electric Specialty High Frequency Converter Units. Primary 12 VDC 16 amperes, 2000 R.P.M. Ball Bearings. Secondary: 550 volts, 1500 cycles, 75 amps. 275 V.A. Single Ph. Built in frequency control. Specially Priced at $30.00

ELECTRIC SPECIALTY FREQUENCY CHANGERS Type RFS2-RFB5304 Input: 220 Volts, 3 Ph, 60 cyc. 1800 RPM. Output: 250 Volts, 20 amp. single ph. 180 cyc. 5000 VA. 3600 Watts. Brand New. Compact ball bearing units for operation of Electronic equipment. SPECIAL PRICE $160.00

GENERAL ELECTRIC HIGH FREQUENCY UNIT. Operates at 440-3-60, 75 amp. output 30 Volts, 3 ph. 540 cyc. 220 Watts, 3.8 amperes. Ideal unit for experimental work or for operation of equipment. SPECIAL PRICE $34.50

GENERAL ELECTRIC DC AC MG SETS

Four Bearing Marine Units: 25 HP 230 Volts, DC coupled to alternator 18.75 KVA, 80% PF, 1800 RPM. Ball Bearings, 4 bearing set; marine duty. Brand New $545.00

WESTINGHOUSE TRANSFORMERS

399 VA; 115-240 Volts; Brand New.

SPECIAL PRICE $3.35

GEN. ELECTRIC TRANSFORMERS

1 KVA, 460-230-230-115. Brand New $19.60

Used, guaranteed, do. $12.50

5KVA, Auto transformer 110-220. Brand New $26.00



JANETTE ROTARY CONVERTERS

110 VA. Input: 110 VDC. Output: 110 VAC, single phase, 60 cycles, 2600 speed. With filter for elimination of radio interference. Reliably Rebuilt. Special Price $19.95

PINCOR ROTARY CONVERTERS

500 VA. Filtered. Brand New. Input: 115 VDC, 4.2 Amp. Output: 220 VAC, 1.90 Amp.

SPECIAL PRICE $38.00

KATO ROTARY CONVERTERS

Type 1205A Model 26KA54 Input: 24 VDC, 28A, 1800 RPM. Output: 115 VAC, 1 phase 60 cy, 1 KVA. Compact and ruggedly built for semi duty oper. Filtered. Shock mounted. New $90.00

ONAN HIGH FREQUENCY MG UNITS

ONAN 400 CYCLE MG SETS, 1 KVA. Operative with 110-220 VAC, 1 ph, 60 Cy. Motor rep-ind. Output single ph. $540.00

With 3 Ph, 220-440 Motor. $455.00

500 CYCLE M-G SETS

British made motor generator, 5 KW, 2 bearing unit. Input 180-240 VDC, output 180 volts, 1 ph weight approx. 1000 lbs. price $425.00

RAYTHEON HIGH VOLTAGE TRANSFORMERS

Pri: 214-240 Volts. Sec 5500 Volts, 1.0 ampere, test 12,500 V. Brand New $72.00

INDUCTION VOLTAGE REGULATOR

Type IRT, form M, 1.44 KVA, 3 phase, 60 cycles, cont. duty, outdoor service. Primary: 208 V., 10.0 load amps. 400 Hertz. Wgt. 500 lbs. 33 x 17" x 14" $81.00

G. E. MOTOR CONTROLLED VOLTAGE REGULATOR

Cat. #837625, Type TIRS, Form —, 2.88 KVA, cont. duty, 60 cy., Primary volts 115, load Amps 16.2. Indoor service. Voltage controlled by mtr. 120/1/60/1/40 HP $9.50

IF IT'S FROM ONE FREQUENCY TO ANOTHER; FROM DC TO AC OR AC TO DC;
IF IT'S FROM ONE VOLTAGE TO ANOTHER, THEN CALL ON US.

Established in 1922 **WILLIAM I. HORLICK COMPANY** *Tel HAncock 6-2480*

409 ATLANTIC AVE. **BOSTON, 10, MASSACHUSETTS**

GENERAL ELECTRIC TUBE SPECIALS

Brand New Mfd. by G.E.

12GP7	12.85	FG-95	20.60	GL-415	
1P24	.79	FG-105	10.95	5550	22.00
FG-32	4.25	FG-172	19.50	8020	1.39
FG-33	11.95	FG-190	12.15	1B9045	3.79
FG-81A	4.95	2C39	21.50	1N9049	3.79

GENERATORS

- Eclipse-Pioneer type 716-3A (Navy Model NEA-3A) Output—AC 115V 10.4A 800 to 1400 cy 1 ø; DC 30 Volts 60 Amps. Brand New — Original Packing $38.50
- Eclipse-Pioneer type 1235-1A. Output—30 Volts DC 15 Amps. Brand New—Original Packing $9.50

PIONEER SERVO SYSTEM UNITS

- Type 12075-1A Torque Amplifier, Input 115 V 400 cy. Complete with Tubes $14.95
- Magnetic Amplifier Assy. Saturable Reactor Type to supply one phase of 400 cycle Servo Motor $5.95

COAXIAL CABLE

RG-8/U—$65.00 per 1000 ft.—Other types in stock

SPRAGUE PULSE NETWORKS

7.5 E3-1-200-67P, 7.5 KV, "E" Circuit 1 microsec. 200 PPS, 67 ohms imped. 3 sections $4.50
7.5 E3-3-200-67P, 7.5 KV, "E" Circuit 3 microsec. 200 PPS, 67 ohms imped. 3 sections $6.75
7.5 E4-16-67P, 7.5 KV, "E" Circuit 4 sections, 16 microsec. 60 PPS, 67 ohms imped $8.25
15—E4-1.5-600-50P, 15 KV "E" Circuit 1.5 microsec. 600 PPS, 50 ohms imped. 4 sections $12.00
15—E6.5-180-50P, 15 KV, "E" Circuit 5 microsec. 180 PPS, 50 ohms imped. 6 sections $25.00

ASB YAGI ANTENNA

ADJUSTABLE STUB TUNING

5 ELEMENT ROTATABLE ARRAY—450 TO 560 MC **$7.00**

SAME EXCEPT DOUBLE STACKED 6 ELEMENT 450 TO 560 MC **$12.70**

Same Except Double Stacked 6 Element 370 to 430 MC **$29.40**

Double stacked antennas can be supplied with hydraulic remote controls at $29.50 per set additional.

SELENIUM RECTIFIER STACKS

FULL WAVE BRIDGE

MAXIMUM RATINGS	MAXIMUM RATINGS
AC VOLTS INPUT - 18	AC VOLTS INPUT - 40
DC VOLTS OUT - 14.5	DC VOLTS OUT - - 36

1.2 Amps	$2.64	0.6 Amps	$3.00
2.4	3.07	1.2	3.44
6.4	4.09	3.2	5.15
13.0	7.67	6.0	9.32
17.5	8.69	9.0	10.05
26	15.33	12	15.64
39	23.00	18	20.12
52	30.67	24	25.96
65	38.33	36	41.24

All voltage and current ratings based on continuous operation in 55°C. (95°F.) ambient, self-cooled. Current ratings can be increased up to 2½ times normal ratings by intermittent operation or forced cooling.

PULSE TRANSFORMERS

UTAH 9262	$2.75
UTAH 9278	$2.75
G. R. 68G-627	$4.75
AN/APN-9 (90175G-501)	$1.50
AN/APN-9 (90175G-502)	$1.50
AN/APN-4 Block, Osc	$1.25

W. E. MERCURY CONTACT RELAYS

Glass sealed mercury wetted SPDT contact assemblies. Magnetically operated. Used in Western Electric D-168479 high speed plug in relays. Supply your own coil ..... $2.00 each

CONSTANT VOLTAGE TRANSFORMERS

Federal Constant Voltage Transformer Input 95-135V 50/60cy Output 115V 210W $34.00
Sola Constant Voltage Transformer Input 95-125V 60cy-Output 15.8V 285VA $24.70
Sola Constant Voltage Transformer Input 105-125V 60cy-Output 115V 80VA $15.95

TYPE "J" POTENTIOMETERS

75¢ each

Resis.	Shaft	Resis.	Shaft	Resis.	Shaft
100	SS	10K	SS	100K	5-16"
200	SS	15K	¼"	100K	¼"
500	¼"	15K	SS	100K	7-16"
650	¼"	20K	SS	100K	SS*
5000	¼"	25K	¼"	150K	¼"
6500	SS	25K	SS	200K	SS
10K	¼"	30K	¼"	250K	SS
10K	¼"	50K	SS	1 MEG	SS

Triple 100K - ¼" Shaft - $ 4.7
All shaft lengths beyond bushing - SS (screw slot)

STANDARD BRANDS ONLY

TUBE SPECIALS

BRAND NEW FIRST QUALITY

COMPLETE STOCK OF RECEIVING, TRANSMITTING, CATHODE RAY, THYRATRON, IGNITRON, MAGNETRON, KLYSTRON, PHOTOCELL, T-R & ATR TUBES. QUOTATIONS UPON REQUEST

WESTINGHOUSE HYPERSIL TRANSFORMER

PRI-115V. 60CY ⅝ KVA
SEC #1 - 240V - 1.56A
SEC #2 - 240V - 1.56A
WT. 30 LBS.

$11.50 EACH

KOLLSMAN INSTRUMENT

LOW INERTIA SERVO MOTORS

Type 937-0240—85.68 Volts—100 Cycles 2 Phase—5 Watts—2650 RPM
Will Operate Satisfactorily at 60 Cycles
Original Price $34.50—Our Price—$8.22 ea.

$7.50 EACH—Lots of 10

SOUND POWERED TELEPHONES

- U. S. INSTRUMENT Type A-260
- WESTERN ELECTRIC Type D-173013
- AUTOMATIC ELECTRIC Type GL-832BAO

U. S. NAVY TYPE M HEAD AND CHEST SETS

These are high quality heavy-duty units not to be confused with cheaper units now available. Designed to withstand exacting shock, vibration, salt water corrosion, temperature and pressure tests. ANY TYPE ..... $14.88 ea., $28.00 per pair
TS-10 HANDSETS ..... $6.92 each

MISCELLANEOUS EQUIPMENT

ID-6APN-4 Indicator	$29.50
R-7/APS-7 Receiver	49.50
R-78.APS-15 Receiver	49.50
SCR-522 Transceiver	32.50
RT-7/APN-1 Transceiver	8.95
FL-5 1020 cycle filter	1.37
RM-29 remote control unit	8.95
RM-14 remote control unit	8.95
RTA-1B 12/24 V dynamotor	20.00
BC-1206-C MC Receiver	7.95
AIA Antenna—5cm conical scan	120.00
AT-38A/APT antenna (70-400 MC)	13.70
AT-49/APR-4 antenna (500-3300 MC)	13.70
CY-230-MPG-1 Radar Console	175.00
G.E. Type JP-1 portable current transformer	32.50
AT-8/AP Antenna	3.95
ASB-4 Radar equip. Complete	69.75
DZ-2 loop antenna with pedestal	14.50

MONTHLY BULLETINS

SEND IN YOUR NAME AND ADDRESS TO GET ON OUR MAILING LIST

All material brand new and fully guaranteed. Terms 20% cash with order, balance C. O. D. unless rated. All prices F.O.B. our warehouse, Phila., Penna., subject to change without notice.

COAXIAL CONNECTORS

83-1AC	.42	UG-12 U	.63	UG-86 U	1.22
83-1AF	.15	UG-21 U	.07	UG-87 U	.79
83-1F	1.12	UG-22 U	.94	UG-171 U	1.83
83-1H	.10	UG-23 U	.85	UG-175 U	.15
83-1J	.80	UG-24 U	.67	UG-176 U	.15
83-1R	.40	UG-27 U	.68	UG-180A U	3.82
83-1SP	.40	UG-29 U	.83	UG-191 AP	.63
83-1SPN	.40	UG-30 U	1.20	MX-195 U	.41
83-1T	1.12	UG-34 U	12.80	UG-197 U	1.33
83-22AP	1.10	UG-35 U	12.80	UG-206 U	.63
83-22F	1.48	UG-37 U	12.80	UG-255 U	1.22
83-22R	.48	UG-58 U	.63	UG-264 U	1.74
83-22SP	.85	UG-85 U	.88	UG-290 U	.85

FULL LINE OF JAN APPROVED COAXIAL CONNECTORS IN STOCK

COMPONENT SPECIALS

FUSES 4AG 10 Amp. $3.00 c
4AG 20 Amp. $3.00 c

MOLDED PAPER CONDENSERS—

.02 MFD	200 VDC	.04 ½ Ea.	$1.00 per 100
.05	200	.04 ½	3.00
.1	200	.04 ½	3.00
.25	200	.06	4.00
1	400	.09	6.00
.005	600	.04 ½	3.00
.01	600	.07	4.75
.05	600	.08	5.50

CRYSTAL DIODES—

1N21	.79	1N22	.89	1N34	.69
1N21A	1.19	1N23	1.19	1N45	.94
1N21B	2.25	1N27	1.09	1N63	1.39

Phase shift capacitor—Type D—150734—4 stator single rotor $2.69

HIGH VOLTAGE MICA CAPACITORS—

Type G-1	.004 mfd	6 KV	$6.3
Type G-3	.00015 mfd	20 KV	12.75
Type UC-3260	.0005 mfd	20 KV	6.98
Type UC-2317K	.0035 mfd	4 KV	3.10
Type UC-2938K	.002 mfd	5 KV	3.16
Type UC-3145A	.00005 mfd	35 KV	11.95

OIL-FILLED CAPACITORS

50 MFD	220 VAC	$3.95
60 MFD	330 VAC	$5.75
32 MFD	2500 VDC	$12.80
7 MFD	660 VAC	$2.95
3.5-5 MFD	1000 VDC	.95
1 MFD	2000 VDC	$1.29
.045 MFD	16 KVDC	$4.70

SPECIAL
2 MFD 12,500 VDC
INERTEEN TYPE FP
$23.95

RCA HI-VOLTAGE TRANSFORMER



Pri—115-230V. 60Cy
Sec—6000V—80 MA

$11.80

Insulated for Voltage Doubler Use

TEST EQUIPMENT

- Alfred W. Barber Labs. Mod. VM-25, VTVM $86.00
- General Radio Model P-500A Standard Signal Generator (Same as G. R. 805A except covers 9KC to 32 MC) $450.00
- TS-10A/APN Delay Line Test Set $25.00
- TS-19/APQ-5 Calibrator $75.0
- AT-48/UP "X" Band Horn $3.95
- REL W-1158 Frequency Meter 180-220 MC $32.95
- CWI-60AAG Range Calibrator for ASB, ABE, ABV and ASVC Radars $38.95
- CRV-14AAS Phantom Antenna for Transmitters up to 400 MC $11.75
- TS-146/AP X-Band Test Set. Price on request.
- TS-150/AP. Price on request.
- CPR-60AAJ and CPR-60AAK—IFF Test Sets. (pair) $16.95

AN/APA-23 Recorder $147.50
TN-18/APR-1 Tuning Unit $95.00
- C-D Quietone Filter Type IF-18 110/220 V AC/DC 20 Amps $9.00

All Items New Except Where Noted * (Exc. Used Condition)

FILAMENT TRANSFORMERS

(All 115V 60cy primary except where noted)

UTC	herm. sealed 5V @ 1A	1.22
UTC	herm. sealed 6.3V @ 0.6A	1.35
UTC	herm. sealed 6.3V @ 3.2A	2.21
Raytheon	herm. sealed 6.3VAC @ 0.6A	1.35
Raytheon	herm. sealed 6.3VCT @ 3A, 6.3V @ 0.6A	2.81
G.E.—6.3V @ 13A, 6.3V @ 2.25A		3.82
Pri 115 230V—Sec 11V @ 15A-25KV insul.		48.00
Pri 115 230V—Sec 9VCT @ 35A		7.65
Amertran—5V @ 100A—35KV insul.		19.50
6.3VCT @ 5A, 6.4VCT @ 2A, 6.3VCT @ 2A, 2½VCT @ 5A, 2½VCT @ 5A		4.77

GENERAL ELECTRIC AMPLIDYNE Motor-Generator

Consists of G.E. 1HP 115V 1 ph 60 cy 11.5A 3450 RPM continuous duty motor coupled to G.E. model 5AM65FB31 250V DC 2A 0.5KW 3450 RPM Amplidyne generator.

Brand New $107.50

LECTRONIC RESEARCH LABORATORIES

1021-A CALLOWHILL ST. PHILA. 23, PA

Telephones - MARKET 7-6590 and 6591

THE BEST IN ELECTRONIC SURPLUS

BC-610 Transmitters with BC-614 Speech Amplifier. 2 Plug in Units and Exciter Units for 10, 20, 40 and 80 meter operation. Output 400 watts AM, 800 watts AB. Operates from 110/115/60 cycles AC. Uses RCA 250-400 tubes. Modern, available as extra cost. Condition Excellent to like new. Export Packed. PRICE, EACH $900.00

SF-1 Radar Units 10 Centimeter. Brand NEW in original spare in shipping case (2 boxes of components). Includes motor generator set in each, all same-grade plumbing, instruction books, 12 cases per set, export packing. PRICE, EACH $2,500.00

TCS Collins Ship Transmitter-Receivers, for 12 V DC operation, radio telephone and radiotelegraph at 20 & 40 watts, 2.0 to 12.0 mc. Complete with all accessories. Excellent, like new condition. EACH $500.00

Beachmaster 250 watt Portable Sound Amplifier Systems, with tube speaker pack, tubes, mike, cables, and spares. Operation from 110 volts, one phase current AC. Excellent and New condition. PRICE, EACH $495.00

PRICE, less case of spares $395.00

Western Electric Model 46AN, 500 watt Sound Amplifier Systems, consisting of 46 watt Pre-Amplifier, 500 watt Power Amplifier with built in power supply, expander compressor circuit, internal blower ventilation, 16 in rotating monitator circuit for magnetic tape recording, volume and meter controls, two speaker racks, each with 6-40 watt dynamic horn units. Operation from 115 V 60 cy AC. New, Unused. Complete with tubes, cables, monitator and instruction manual. EACH $595.00

RMCA Model 8010 I.F. Ship Main Radio Transmitter, 12 to 500 KC from CA & F. Excellent condition. Less tubes, guaranteed. PRICE, EACH $475.00

RMCA Model 8019A H.F. Ship Transmitter, complete to mate above, for H.F. transmission, A1 and A2. For main output. Excellent Condition, less tubes and MG. Operating with 3000 power. PRICE, EACH $300.00

RMCA 8061 Emergency Transmitter set, for 500 watts output with 12/115 V. DC motor generator and battery charging equipment. Condition as new. Complete with tubes. PRICE, EACH $275.00

RMCA 8067 Lifeboat Transmitter-Receiver set, for permanent installation, complete with tuning unit, Dynamotor. Excellent condition. PRICE, EACH $100.00

RMCA 8006X Auto Alarm Receiver, for 8X Automatic watch (Control Code actuated). Alarm Thermal Relay Control Bell and warning light. For 110 V. AC operation. Excellent condition, with tubes. PRICE, EACH $250.00

RMCA 8506B Ship Receiver, 45 to 500 KC and 2 to 20 mc, low calibration. Excellent condition. With tubes. Excellent Condition. PRICE, EACH $200.00

RMCA 4707 Direction Finder Unit. For mounting of loop, shaft, rotating wheel. Excellent condition. Loop shaft is approximately 6 ft. long. Can be easily improvised. With tubes. PRICE $750.00

Mackay Model 150-AY, I.F. Ship Transmitter, 100 to 500 KC and A2 operation. Input power 1 KW. PRICE, with MG, 115 V. DC ..... EACH $350.00

PRICE without MG ..... EACH $250.00

RC-183 Radio Beacon Equipment, 20 to 80 mc (some to 108 mc on request). Directional transmitters and receivers. Ideal for aeronautical navigation. NEW ..... Complete ..... Export packed. EACH $90.00

SCR-511 "Pogo Stick" Walky Talky. Portable two-way AM radiotelephone for 2 miles operation, complete with transmitter-receiver, antenna, control box, battery box, headset, mike, spare tubes. Transmitter Receiver, 20.74 mc. Tube set-up 1-1A7, 1-1A5, 1-1C6, 1-1D5, 1-1F4, 1-1H5, 1-1J6. Tube set-up 2-1A7, 1-1A5, 1-1C6, 1-1D5, 1-1F4, 1-1H5, 1-1J6. Volume Control, Tone Control, Squelch Control, Antenna Trimmer. Power Supply 2 Vibrator Power Supply. Complete with tubes. PRICE, EACH $75.00

12 Volt DC to AC Rotary Converter, 115 V. AC output, 60 cycle, 1 KW. PRICE, EACH $75.00

NEW. 15 TON $18.00

General Electric Amplidyne M. G. Set, ... NEW. PRICE, EACH $60.00

SD-5 Radar Transmitters, ... Price, Each $115.00

X-1 I.F. Equipment, ... Price, Each $365.00

X-1 APG-2 Radio Transmitters, ... Price, Each $365.00

EACH $52.50

SB-21-GTA-2 & SB-21-GT Switchboards & Power Supply, ... Price, Each Set $100.00

BC-319-A Transmitter, CW only 300 watts output. Freq. range 4.0 to 13.4 mc. Operates from 110-220 volts, 60 cycles AC. Excellent condition. Less tubes. PRICE, EACH $300.00

Wilcox 96-200-A 2-KW RF section. Large cabinet with complete RF and contains the VFO, intermediate sections and PA stage. Almost new, but lacks PA inductance unit. Less tubes. PRICE $500.00

Wilcox 96C 1 KW RF Units. 2.0 to 20.0 mc crystal controlled. Four of these units with Rectifier 56A and Modulator 56A make a complete 4-channel Point-to-Point and Radiotelephone fixed station. Used Condition, less tubes. LOT PRICE, EACH $400.00

TBK-10, 500 watt 2 to 6 mc CW Telegraph Transmitter designed for ship installation. Almost new condition, complete with tubes. One MG set and a receiver. PRICE, EACH $350.00

Wilcox 98-A Ground Station. A-3 emission 50 to 250 mc, 50 W. output, 4-channels dial telephone section, with receiver for above frequency coverage, and remote control unit. For Ship to Air Use. Used condition. With tubes. PRICE, EACH $600.00

Link FM Transmitter-Receiver, 70-100 mc, 50 watts output. Model 1408 Dr. Wall style cabinet containing transmitter, receiver and 24 V.D.C. power supply, handset. Size 24" x 21" x 11". NEW condition. Complete with tubes, crystals, special telescopic antenna. Instruction book. PRICE, EACH $500.00

"SNOOPERSCOPE" TUBE

Intra Red Image Converter Tube (Partial) to make "Snooperscopes," "Sniperscopes," and other devices that see in the dark. Has many useful industrial applications. Operates with invisible infra-red rays, without requiring any amplifiers. Supplied with technical data and diagram. Every tube guaranteed! WE WILL NOT BE UNDERSOLD.

EACH $4.95

6 for $25.00

BAUSCH & LOMB Front End Lens Assembly, for best images f/2.5 size. E.F. EACH $10.00

MOUNTED LENS UNIT, also for front end, results as good as F. 2.5 speed. Speed is f/1.4 with lens outside the 4" mount for best length of focus, etc. PRICE, EACH $7.00

580-765 MC SUPERHET RECEIVER, WITH WAVEMETER

Panels modified for Citizen's Band reception, or for experimental use on VHF Transition. Uses a 955 Acorn detector oscillator into 3-stage resistance-coupled IF amplifier. Output is for headphone. Includes VR-150 voltage regulator tube, 6J5 mixer, and 6C4 oscillator. For 110 volts, 50-60 cycle AC. Calibrated Wavemeter furnished as separate portion, with variable tuning dial and hand-plotted calibration curve. Panels permit viewing frequency of incoming signal. Size 19" x 10½" x 7". NEW. Supplied complete with tubes and diagram plus calibration curve, and tubes. PRICE, EACH $75.00

RADAR TRAINING SET—MARK V

For Student Schools, Labs, or actual radar application. Operates in the 580 to 765 mc region. Designed especially to illustrate how radar sets function, and permits making numerous experiments in the operation of radar sets. Consists of a modulator unit, a separate transmitter using 805 triode with 1.5 watts at 600 mc, with 100 KC internal modulator using 6C4 oscillator. Externally modified mounting permits use of external modulator. Separate receiver using 955 triode with 1.5 watts at 600 mc, and 1.5 KC audio amplifier. Has 100 KC and 15 KC audio selection switch. Separate wavemeter with variable tuning unit and hand-plotted calibration curve. Includes necessary cables and connectors. Operates from 60 cycle AC set or Antenna Dipole and Reflector. Size of panels 19" x 10½". Shipping weight 60 lbs. NEW ..... unused ..... PRICE, Per Set $175.00

Technical Manual (Complete Instruction Book) for the BC-312 & BC-342 Receiver. PRICE, Postpaid $1.50

20-40 MC FIELD STRENGTH AND WAVEMETER

Uses a 6J5 Mesny antenna with a 1R4 Portable, to locate quickly the direction of signal. Uses battery operation and requires no external power. Tuning dial has dial lock, for fixed frequency. Has built-in antenna, attaching plug for external antenna. Has phone jack for headphone. Complete with tubes. PRICE, Each ..... NEW $14.95

PE-95B A. H. 10-12 KVA Gas Engine Generators, 110-220 V. AC ..... Complete ..... NEW. In original crates. PRICE, EACH $1,350.00

HOMELIGHT 1.5 KW GAS Engine Generators, 110 V. AC ..... Complete and guaranteed. PRICE, EACH $250.00

AN/CRT-3A Sonobuoy Transmitters, for sonic and subsonic research. With parachute, tubes, etc., ready for operation except standard type dry batteries. Size 24" x 8" x 8". NEW. PRICE, EACH $35.00

T-17, T-18, T-19 TUNING UNITS, for APR-4. NEW. EACH $35.00

Prices quoted are net, FOB N.Y.C. our warehouse. Export packing extra, except where included in specifications. All material is guaranteed as represented, and offered Subject to prior sale.

TELEMARINE COMMUNICATIONS COMPANY

CABLE ADDRESS: TELEMARINE, N. Y.

540 W. 27th St., N. Y. 1, N. Y.

ALL MERCHANDISE GUARANTEED

Prices fob our whse, N. Y. C.

Immediate Delivery subject to prior sale or disposition

PHONE and CW TRANSMITTERS

100 Watt W. E. radiotelephone w selective ringer ship or shore, 10-channel, 110 ac oper'n.

25 Watt RCA RT-32 v'ble, 4-channel.

MANY NAVY MODELS, including TIE, TCS, TBK, TBM, TAJ, etc. to choose from. Write for info.

FOR FOREIGN GOVERNMENT, PRIVATE YACHT, or SHORE STATION
WESTERN ELECTRIC RADIO
400-800 Watts

Operates from 110-220 volts AC
Freq. Range: 2.0-18.1 mcs
New and complete with spares
This is the same transmitter used on famous SS. "QUEEN MARY"!

SONAR— 20 complete, new model NAA "Herald" underwater anti-submarine units. See Electronic Eng. for Feb. 1949 for description. QBG—12 units, portable, new ..... $300.
Also WEA, QBE, QCO, etc. all

RADAR— SN 10 cm. portable, easily set up. Has 2, 5 & 25 mile ranges, 5 in. A scope. Complete w full spares ..... $685.
SQ 10 cm. TPT ..... Write
Submarine—SJ and SD ..... Write
Navigation Beacons—Navy Models CXEH and CPN-8, for 115-220 VAC.
Airborne APS1 and APS-4 also new ASB 10 cm. complete w ant & hydraulic controls ..... $285.
— Many other types in stock —

TEST EQUIPMENT

3 cm., multipurpose, portable, field and bench test set, model **TS-263A/TPS-10.** Brand new $575.

THIS MONTH'S SPECIALS* IN: TUBES

1H6G	$ .75	404	$8.50
1N6G	.75	829	7.50
1J6G	.75	829A	7.50
6AC7	2.25	860	12.50
6N7GT	2.25	861	12.50
6V6	.75	872A	1.50
6SL7GT		715B	6.75
446B	1.75		

MAGNETRONS, KLYSTRONS

2J26	$ 6.50	700 A-C	$15.00
2J27	11.00	706 D-GS	45.00
2J51	24.00	725A	42.00
2K25	24.00	725 AY	42.00
4J31	55.00	725 GS	24.00
4J35	110.00	DH6145 (X-L)	130.00

INSULATORS

12-inch stand-off units, brass or bronze cap and 2-hole base $1.00

We have more than a million in stock stand-off insulators. Write us your insulator problem, please.

WRITE US YOUR INSULATOR NEEDS

CAPACITORS (oil-filled)

.01 mfd 100 mc	$1.00	.10 mfd, 10000 v	$1.00
.25 mfd 7 kv	2.50	2 mfd, 1000 v	1.75
1.25 mfd 600 vdc	.75	.15 mfd, 7500 v	3.00
2 mfd 600 vdc	.80	1 mfd 10 kv dc	14.00
4 mfd 600 vdc	.85	.25 mfd 20 kv dc	25.00

DYNAMOTORS (first number is dc volts input)

A 28 @ 1.25 a to 250 @ 60 ma	$ 5.00
B 28 @ 7 a to 440 @ 275 ma	5.00
C 28 @ 10 a to 600 @ 400 ma	6.50
D 14 @ 4 a to 275 @ 150 ma	6.50
E 12 @ 10 a to 1000 @ 2.5 a	10.00
F 12 @ 15 a to 500 @ 300 ma	15.00
G 12 @ 15 a to 600 @ 350 ma	15.00

AND MANY OTHERS

COAX CONNECTORS

83-1SP	$ .35	UG 87 U	
83-1AP	.17	UG-21 to UG-148	1.75
83-1R	.35	UG-58 U	6.50
83-1U	.05	UG-58 T	4.75
UG-58 T	.50		

METER MULTIPLIER

High precision multiplier, 20 megohms at 20,000 volts with accuracy of ½ of 1%. Mfrs. Weston. Sp. Scale, only $21.25

*New units. Some quantities limited.

COMPASS
COMMUNICATIONS CO.
393 Greenwich Street, New York 13, N. Y.
Cable: Compradio, New York
Phone: WEekman 4-5810

"TAB"
THAT'S A BUY

PRECISION RESISTORS—
Over 2½ Million in Stock

"TAB"—Specialists in Precision Resistors
No Mfrs. Choice—We Ship Types In Stock

0	116	2	09.4	700	1919	6140	23400 147000
0	42	216		711	1922	6200	23500 150000
0	425	220		733	1924	6300	24000 155000
0	607	220	4	740	1926	6495	24600 160000
0	7	225		750	1960	6500	25000 165000
1	03	230		800	1980	6840	25200 166750
1	3	235		806	2000	6990	25400 167000
1	75	240		850	2045	7000	25833 169200
2	5	245		854	2050	7320	26000 175000
3		245	4	899	2095	7500	26500 180000
3	83	250		900	2141	7700	26600 180680
4	35	260		910	2142	7717	27000 185000
5		271		917	2145	7900	27500 186680
5	025	275		946	2150	7930	28000 190000
6	25	280		978	2160	7950	28430 198000
6	5	286		1000	2180	8000	28500 200000
7		289		1030	2187	8094	29000 201000
7	8	299		1056	2195	8250	29500 205000
7	9	300		1059	2200	8500	29990 210000
8		310		1067	2250	8700	30000 215000
10	38	311	5	1100	2300	8770	31000 220000
11	25	320		1110	2400	9000	31500 225000
12		325		1150	2450	9100	32000 229000
13	52	330		1155	2463	9445	33000 230000
14	2	340		1162	2485	9500	35000 235580
14	25	350		1200	2490	9710	37000 238000
14	5	360		1225	2500	9800	38140 240000
15		366	6	1250	2525	9900	38500 245000
16		370		1260	2600	9962	39000 250000
17		375		1300	2625	10000	39500 265000
19		380		1350	2635	10410	40000 265000
19	2	389		1355	2700	10500	42000 270000
20		390		1400	2750	10600	43000 275000
22		400		1455	2850	10900	44000 294000
23		410		1495	2860	10956	47000 300000
24		414	3	1500	2870	11000	47500 307500
25		418	8	1510	2900	11400	48000 311000
26		425		1515	3000	11500	48366 314000
28		426	9	1600	3100	11690	49000 316000
30		427		1640	3163	12000	50000 325000
31	5	440		1646	3250	12500	52000 330000
37		450		1650	3290	12600	55000 330000
38		452		1670	3333	13000	56000 333500
39		460		1680	3384	13100	57065 350000
50		470		1710	3400	13500	58333 355000
51	78	475		1712	3509	13550	60000 375000
55		478		1740	3700	13600	61450 380000
56	7	480		1770	3730	14000	62000 400000
60		487		1800	3900	14250	64000 402000
63		500		1818	4000	14400	65000 420000
68		520		1830	4018	14500	66600 422000
74		525		1865	4020	14550	66650 425000
75		540		1892	4220	14600	67500 450000
80		550		1894	4250	15000	68000 455000
81	4	575		1895	4300	16000	70000 470000
85		580		1896	4314	16500	72000 500000
89	8	588		1897	4440	16800	73500 520000
95		600		1898	4444	17000	75000 521000
100		612		1899	4500	17500	80000 525000
101		625		1900	4720	18000	82000 540000
105		633		1901	4750	18000	84000 550000
105	7	640		1902	4850	18300	85000 570000
107		641		1903	4855	18500	85750 575000
120		645		1904	4900	18550	88000 600000
121	2	649		1905	5000	18800	90000 620000
125		650		1906	5100	19000	91000 650000
130		657		1907	5210	19500	93500 650000
135		665		1908	5235	20000	95000 660000
147	5	668		1909	5270	20441	100000 690000
150		670		1910	5300	20500	110000 700000
160		675		1911	5500	21000	115000 750000
165		675		1912	5630	21500	116667 761380
170		680		1913	5710	22000	120000 800000
175		681		1914	5728	22500	125000 813000
179		684		1915	5910	22930	130000 850000
182		689		1916	6000	23000	140000 900000
182	4	692		1917	6100	23150	141000 930000
200		699		1918	6125	23320	145000 950000

Any 100 Above, Each 35c—Ten for $3.29

MEGOHMS

1		1.579		2.5	3.9	6.7	10
1.1		1.65		2.7	4	7	11 55
1.2		1.75		2.75	4.23	7.5	12
1.25		1.8		2.8	4.25	7.62	12.83
1.3		1.9		2.855	4.5	7.74	13
1.35		2		3	5	8	13.85
1.39		2		3.5	5.5	8.02	
1.4		2.11		3.5	6	8.5	
1.5		2.2		3.623	6.5	9.05	
1.57		2.25		3.75	6.6	9.5	

Any Size Above, Each 70c—Ten for $6.49

Vacuum Precision Hi Volt Resistors



Megohms 1.2 1.5 2 2.5 3 3.5 4 5 6 7 8 9 10
Each $4.95 4.95 4.95 4.95 4.95 4.95 4.95 4.95 4.95 4.95 4.95 4.95 4.95
10 for $47.50

MV Resistors—High Voltage

Megs	Type	Watts	Peak	Each	10 for
1	MVE	10	15Kv	$1.95	
1	MVG	2	5Kv	1.29	59.98
1	MVG	4	5Kv	1.29	9.98
1	MVP	10	15Kv	1.69	
1	MVP	20	25Kv	1.98	13.49
2.5	MVE	10	15Kv	1.98	16.98
2.5	MVG	2	5Kv	1.29	9.98
2.5	MVG	4	5Kv	1.69	13.49
2.5	MVP	10	15Kv	1.69	
5	MVG	4	5Kv	1.29	9.98
5	MVP	10	15Kv	1.69	13.49
5	MVP	20	25Kv	1.98	
10	MVE	25	40Kv	1.98	16.98

"TAB" That's a Buy

Dept. 11E, 6 Church St.
Corner Church & Liberty Sts.
New York 6, N. Y.
WOrth 2-7210

PEAK ELECTRONICS CO.
COMPONENTS

Phone COrtlandt 7-0448 7-0449

SELECTED AND GUARANTEED SURPLUS AT A FRACTION OF ORIGINAL COST.
188 WASHINGTON ST., NEW YORK 7, N.Y.

PANEL METERS

GE—General Electric
WH—Westinghouse
SU—Sun
W—Weston S—Simpson
SQ—Square Case
*—Spec. Scale



2" METERS		3" METERS	
0-20 UA, S*	$4.50	0-20 UA, W	$12.50
0-500 UA, S, WH*	2.95	40-0-40 UA, W*	7.95
0-5 ma, S, Sq*	2.45	50-0-50 UA, GE	8.95
0-5 ma, GE*	1.95	0-75 UA, GE	9.95
0-20 ma, S	1.75	0-1 ma, S*	4.50
0-25 ma, SU*	1.75	0-2 ma, WH, S	3.95
0-50 ma, SU Sq*	1.95	0-5 ma, GE Sq	3.95
0-50 ma, GE	2.45	0-10 ma, WH*	2.95
0-2 amp RF, S Sq	1.95	0-20 ma, S, WH	3.95
0-4 amp RF, GE	1.95	0-20 ma, GE Sq	3.95
0-9 amp RF, WH	1.95	0-30 ma, GE Sq	3.95
0-250 ma AC, GE	2.95	0-80 ma, WE	2.95
0-20 Volt DC, SU	1.75	0-100 ma, GE Sq	3.95
0-20 Volt DC, W	2.45	0-200 ma, GE Sq	3.95
0-30 Volt DC, GE	2.45	0-300 ma, GE Sq	3.95
0-30 amp DC, GE	1.95	0-2 amp, GE Sq	3.95
		0-2 amp, WH	3.95
		0-5 KVDC, GE	7.95
		0-300 VAC, GE Sq	4.95
		0-50 Volt DC, DA	2.75
		0-800 VDC, GE Sq	4.50
		0-2 KV DC	6.95

6" METERS	
0-1.5 amp DC, GE	6.95
0-300 volt, AC, GE	7.95
0-12 KV DC, GE	12.95

LINK TEST SET

Type 1410. Contains two 3½" meters—a 75-0-75 microamp Galvanometer and a 0-1 MA multi-scale meter. Has ten switch for changing range. Ranges are as follows: 75-0-75 microamps, 1MA 2.5 MA, 50 MA, 25 volts, 300 volts. Ideal for balancing discriminators and general lab use. Housed in hard wood case with hinged cover. 10" x 8" x 8½". Only ..... $14.95 ea.

PANEL METER KIT

Here's what you get:
- 2" Sq. bakelite cased meter. Govt. Surplus.
- Scales for all the following ranges:
  0-50 ma, 0-100 ma, 0-200 ma, 0-500 ma.
  Precalculated shunt sizes for all ranges.
- Complete instructions.

Only $2.50 ea. 3 for $6.75

SCR 522 TRANSMITTER RECEIVER

Complete with tubes and separate Dynamotor Power Supply. Excellent condition $36.50

RAYTHEON SWINGING CHOKE

2 to 12 Henrys, 1 Amp to 100 Ma, 15 Ohms DC fully cased. High voltage insulation, ceramic insulators. Very conservatively rated. Weight 50 Lbs. ..... $14.95 ea.

HIGH WATTAGE ANTENNA RELAY

110-220 volt 50 cycle Solenoid. D.P.D.T. Heavy duty silver plated contacts rated 15 amps at 5000 volts. Sturdy construction. Isolantite insulation. Base 8" x 10½". Made by Monitor Controllers $18.50
Same specs. as above but 10KV 12.50
Same specs. as above but 15KV 42.50

GUARDIAN LATCHING RELAY

S.P.D.T., 110 volt 60 cy. coil, 15 amp contacts. $1.95

SENSITIVE RELAY

2000 ohm coil, SPDT, breaks at 3 ma. Plugs into 5 prong socket ..... 99 ea.

WESTINGHOUSE SELENIUM RECTIFIER

Hermetically sealed. Oil Immersed Full Wave Bridge. 12 volts AC Input, 24 Volts at 2 Amps Output. Size 2½x2½x3½ ht. ..... $3.75 ea.
Military Vibrapack Transformer 6 Volt Input, Output 300 Volts at 100 MA $3.95

MISCELLANEOUS BARGAINS

.02 400 volt .dc ..... 15 for $0.99
.01 600 volt .dc gigtalc micas ..... 10 for .97
Butterfly cond. 2 to 11 mmf ball bmgs. ..... 3 for .99
Var. cond. 150 mmf .07 spacing ..... 2 for .99
Variable ceramic cond. 20 to 125 mmf ..... 5 for .99
35 .at 16 KV plus 75 at 8 KV Oil Cond 3.95
.1 MFD 2500 VDC Oil Cond ..... .89
.05 MFD VDC Oil Cond ..... .75
75 MFD 330 VAC Oil Cond 6.95
25 ohm 625 watt Rheostat 2.95
50 meg 35 watt resistor ..... .99
10 meg 10 watt ..... .49
2 meg 5 watt ..... .33
250 mmf midget var. ceramic ins. ..... .69
4 Pole ST lever switch ..... .99
Ceramic RF switch, SP 11 pos ..... .95

WIRE WOUND RESISTORS

5 watt ohms: 25-50-260-473-2500 ..... .09 ea.
10 watt ohms: 25-10-84-100-473-1325-2K-4K ..... .15 ea.
20 watt ohms: 50-75-100-200-250-1K-1.5K-2.5K-2.7K-5K-10K-16K-20K ..... .20 ea.

PIGTAIL MICAS

MMF: 5, 20, 50, 60, 100, 250, 300, 400, 500, 750, 800, 1000, 2000, 5000 ..... $0.08 ea.

LEACH RELAY

4 Pole Double Throw
4500 ohm coil ..... 2.50 ea.

POWER TRANSFORMER BARGAIN

740 volts CT @ 185 ma, 6.3 volts @ 5 amp, 5 volts @ 3 amp. Pri. 110 volt 60 cy. Half shell mounting. Only ..... $3.49 each

WESTON PORTABLE AC VOLTMETER

Mod. 433, 0-150 volts AC, ½ of 1% accuracy, 25 to 2400 cycles, 28 ohms Res. mirrored scale. Bakelite case 5"x5"x3½" with leather handle $26.50

METER MULTIPLIERS

2 Meg 1/5 of 1% Cage Enclosed 2 KV $3.95
2 Meg 1/2 of 1% Tubular 2 KV 1.95
4 Meg 1/2 of 1% Tubular 4 KV 3.75

SOLA CONSTANT VOLTAGE TRANSFORMER

2 KVA... 17.4 amps.. Input 95 to 135 volts 60 cy. Output 115 volts constant. Type 4, single phase. 31¼" long, 9½" high, 7½" wide. ..... $137.00 each

OIL CONDENSERS

56	mfd	220 vdc—	$3.95	8	mfd	2000 vdc—	3.95
4	mfd	600 vdc—	.59	10	mfd	2000 vdc—	4.95
6	mfd	600 vdc—	.79	6	mfd	4000 vdc—	4.90
8/8	mfd	600 vdc—	1.39	1	mfd	5000 vdc—	4.50
10	mfd	600 vdc—	1.35	1/1	mfd	7000 vdc—	2.25
6	mfd	1500 vdc—	2.95	2	mfd	6000 vdc—	9.95
10	mfd	1500 vdc—	3.75	2	mfd	7500 vdc—12.75	
2	mfd	2000 vdc—	2.25	.65	mfd	12,500 vdc—12.95	

HIGH CURRENT MICAS

Type G4 Ceramic Case 3¾" High, 5" Diameter Tolerance 5% or Better.

CAP MFD	Amps 1 Mc	KV DC	Price Each	CAP MFD	Amps 1 Mc	KV DC	Price Each
.08	60	4	$27.50	.009	40	15	$29.50
.1	70	4	29.50	.00047	23	15	24.50
.05	60	5	24.50	.002	20	20	28.50
.032	45	6	26.50	.0031	20	20	29.50
.02	40	9	29.50	.001	12	30	27.50
.0117	30	14	24.50	.0005	10	30	27.50
.0075	19	15	24.50				

	TYPE G1				TYPE G2		
.00025	4	6	$3.95	.01	25	2	6.95

BAKELITE CASED MICAS

MFD	VDC	Price	MFD	VDC	Price
.001	500	$ .18	.025	2500	1.25
.01	600	.25	.007	2500	.90
.02	600	.25	.004	2500	.60
.027	600	.25	.005	3 KV	.70
.01	1 KV	.45	.0001	5 KV	.70
.02	1200	.55	.0015	5 KV	1.60
.024	1500	.65	.005	5 KV	2.50
.033	1500	.75	.0005	8 KV	2.90
.02	2 KV	.90	.0003	8 KV	2.90
.005	2500	.85	.002	5 KV	3.50

CHOKE BARGAINS

D open frame C cased

6 hy 50 ma, O	$ .39	4 hy 450 ma C	3.95
6 hy 80 ma, O	.75	10 hy 250 ma, C	2.75
8 hy 175 ma, C	1.49	5 hy 175 ma, C	2.95
5 hy 400 ma, C	1.95	20 hy 56 ma, C	.99

POWER TRANSFORMERS

Hermetically sealed. Pri. 110 volts 60 cy.
1110 volts CT 60 MA, 520 volts CT 160 MA, 6.3V, 10A, 6.3V, 1.25A, 5V/2A, 5V/2A ..... $4.95 ea.
300 volts CT 300 MA, 2.5V/7A, 2.5V/2A, 0.5V, 1.5A 2.75
1050 volts @ 20 ma, 28V, 4A, 2.5V, 5A 2.75
1000 VCT @ .025 ma, 6V 6a, 5V 3a tap 2.95
300 VCT 100 ma, 6.3V 4A, 5V 3A 2.79
1100 V @ 4.5 ma, 5V @ 3A, 15 KV insul 4.95

FILAMENT TRANSFORMERS

110 V 60 CY Primaries—Full Ratings
6.3V 12 Amp $1.95 2.5V 20A 2.5V 20A $6.95
2.5V 10A HV ins. $3.95 5V 6A, 6.3V 3A 1.95

CERAMICONS

MMF: 1.5, 2, 3, 5, 6, 10, 20, 25, 50, 100, 500 ..... $ .05

SILVER MICA CAPACITORS

MMF: 10, 47, 50, 60, 330, 750, 780, 1000 ..... $ .09

MOTOR & GEAR BOX

Type RL12R. Motor 24 Volts DC, ⅛ HP—1 min. with Gear Reduction Box ..... $7.25 each

30 WATT WIRE WOUND RESISTORS

Ohms: 100-2500-3K-4500-5100-15% ..... 8 for .99

ADJUSTABLE SLIDER RESISTORS

20 Watt: 1, 5, 50 Ohms ..... .25
50 Watt: 100, 500 Ohms ..... .35
75 Watt: 100, 150, 200 Ohms ..... .39
100 Watt: 20, 50, 75, 120, 500 Ohms ..... .49

PRECISION 1% W.W. RESISTORS

Ohms: 2K, 5K, 8500, 50K, 95K ..... .25 ea.

100 WATT NON INDUCTIVE RESISTORS

Ohms: 250, 500, 12,500 ..... .75 ea.

MOSSMAN SWITCH

4 Pole Single Throw ..... .88 ea.

CAN'T KINK

3 cond. 5/16" dia. Tough rubber cov. cable. For remote or Ant. Control Foot switch etc. Cut to your order Min. 50 ft. ..... 3½¢ ft.
550 ft. Metal reels Express Collect $15.00

RCA 100A

Free Floating Cone Type Magnetic-Loud Speaker. Removed from rooms of a large N. Y. Hotel. Original cost $32.00 ..... $1.85
3 for $5.00

W.E.
24 & 12 volt Telephone lamp ..... doz. $1.50
G.H.
6 pole 35 ampere 115v. AC relay $4.90
3 ampere G.E. Mercury Switch
⅜" glass tube ..... 3 for $2.50

GRAIN OF WHEAT LAMPS

Used for illuminating meters, compass, dials, airplane instruments, etc. Soldering iron removes lamp from base to use in models, doll houses, miniature trains, Xmas trees, etc.
Mazda G.E. 323 — 3V . 19 A
Mazda G.E. 328 — 6V . 2A
Either type, doz. $1.80



MARKTIME 5 HOUR SWITCH

A 10 amp. timing device. Pointer moves back to zero after time elapses. Ideal for shutting off radios and TV sets when you go to bed. Limited supply at this special PRICE $3.90

Also available in 15 min. 30 min. 1 hr. at $5.90

ISOLATION TRANSFORMER $1.95

Nat. known Mfgrs. 50 watt 2 windings, 115 V. to 115 V. 60 cy. Ideal to prevent shocks from small radios and medical and electronic devices.
Shipping Weight 5 lbs.

Other sizes and 220-110 in stock.

Kilowatt Demand Meter Totalizer containing heavy duty TELECHRON B.T. 1 RPM motor and hundreds of watch size gears, clutches, springs, etc. Shipping weight 2 lbs.
5 for $10.00 $2.50

RADAR MAGNETS ..... $5.00 to $17.50
DPDT 6 volt Battery D.C. 10 ampere Relay ..... 3 for $1.95
DPDT H&H Toggle Switches 10 for $4.50

NEW HOLTZER-CABOT TOTALLY ENCLOSED MOTORS



50 R.P.M. Reversible Single Phase Capacitor-Run type. 115 Volts AC 60 cycle 0.3 Amp. Torque 100 oz. inches. 4¾" shaft ⅝" dia.

$17.50 each

GONIOMETERS CFT-47283 CFT-47172 in stock

We are Authorized Wholesalers for Micro Switch Corp. and carry the largest stock of Allen-Bradley Solenoids. Potter & Broomfield Relays. Guardian Electric Co. Solenoids and Relays and Haydon Clock Motors in all speeds. Electric Counters.

EST. 1923 **BLAN** EST. 1923

Experimenters and Inventors Supplies

64 Dey St., New York 7, N. Y.

SELENIUM RECTIFIERS and ASSOCIATED COMPONENTS

SINGLE PHASE

Full Wave Bridge

Input: 0-18 VAC Type No.	Current	Output: 0-12 VDC Price
B1-250	250 Ma.	$ .98
B1-1	1.0 Amp.	2.49
B1-1X5	1.5 Amp.	2.95
B1-3X5	3.5 Amp.	4.50
B1-5	5.0 Amp.	5.95
B1-10	10.0 Amp.	9.95
B1-20	20.0 Amp.	15.95
B1-30	30.0 Amp.	24.95
B1-40	40.0 Amp.	27.95
B1-50	50.0 Amp.	32.95

Input: 0-36 VAC Type No.	Current	Output: 0-26 VDC Price
B2-150	150 Ma.	$ .98
B2-250	250 Ma.	1.25
B2-300	300 Ma.	1.50
B2-2	2.0 Amp.	4.95
B2-3X5	3.5 Amp.	6.95
B2-5	5.0 Amp.	9.95
B2-10	10.0 Amp.	15.95
B2-20	20.0 Amp.	27.95
B2-30	30.0 Amp.	36.95
B2-40	40.0 Amp.	44.95

Input: 0-115 VAC Type No.	Current	Output: 0-90 VDC Price
B6-200	200 Ma.	$ 2.95
B6-600	600 Ma.	5.95
B6-750	750 Ma.	6.95
B6-1X5	1.5 Amp.	10.95
B6-3X5	3.5 Amp.	18.95
B6-5	5.0 Amp.	24.95
B6-10	10.0 Amp.	36.95
B6-15	15.0 Amp.	44.95

Full Wave Center Tap

Input: 10-0-10 VAC Type No.	Current	Output: 0-8 VDC Price
C1-10	10.0 Amp.	$ 6.95
C1-20	20.0 Amp.	10.95
C1-30	30.0 Amp.	14.95
C1-40	40.0 Amp.	17.95
C1-50	50.0 Amp.	20.95

THREE PHASE

Full Wave Bridge

Input: 0-236 VAC Type No.	Current	Output: 0-250 VDC Price
3B13-1	1.0 Amp.	$ 22.00
3B13-2	2.0 Amp.	32.00
3B13-4	4.0 Amp.	56.00
3B13-6	6.0 Amp.	81.50
3B13-10	10.0 Amp.	105.00
3B13-15	15.0 Amp.	120.00

RECTIFIER MOUNTING BRACKETS

For Types B1 through B6, and Type C1 $.45 per set
For Types 3B ..... 1.05 per set

D-C PANEL METERS

Attractive, rugged, and reasonably priced. Moving vane solenoid type with accuracy within 5%. Square case.

0- 6 Amperes DC
0-12 Amperes DC
0-15 Volts DC
Any range $2.49 each

CATALOG

Write for our Catalog No. 719, which lists additional Selenium Rectifiers, associated transformers, condensers and filter chokes.

Minimum Order $5.

All prices FOB our NYC warehouse. Send check or money order. We will ship transportation charges collect. Rated concerns send P.O. Terms Net 10 days.

POWER SUPPLIES

GENERAL PURPOSE Low voltage DC power supplies, with variable outputs. Rugged—Dependable—precision control.

Features

- √ Long life Full Wave Selenium Rectifiers
- √ Output Voltage Continuously Adjustable from Zero to Maximum
- √ 3" Voltmeter and Ammeter 2% acc'y.
- √ Stepless Control
- √ Instant Power—No Warm-Up Period
- √ Assembled and Ready to Operate
- √ For 115 VAC 60 Cycles
- √ Dimensions 8½" x 16⅜" x 8"

Write for descriptive bulletin GPA

Model	Voltage	Current	Price
GPA810	0-8 VDC	10 Amps	$69.50
GPA1210	0-12 VDC	10 Amps	75.00
GPA2810	0-28 VDC	10 Amps	85.00

RECTIFIER CAPACITORS

CF-1	1000 MFD	15 VDC	$ .98
CF-20	2500 MFD	15 VDC	1.95
CF-6	4000 MFD	30 VDC	3.25
CF-19	500 MFD	50 VDC	1.95
CF-16	2000 MFD	50 VDC	3.25
CF-21	1200 MFD	90 VDC	3.25
CF-9	200 MFD	150 VDC	1.69
CF-10	500 MFD	200 VDC	3.25

Mounting clamps for above capacitors ..... 15c ea.

RECTIFIER TRANSFORMERS

All Primaries 115 VAC 50-60 Cycles

Type No.	Volts	Amps.	Shpg. wt.	Price
XF15-12	15	12	7 lbs.	$ 3.95
TXF36-2	36	2	6 lbs.	4.95
TXF36-5	36	5	8 lbs.	6.50
TXF36-10	36	10	12 lbs.	9.95
TXF36-15	36	15	20 lbs.	11.95
TXF36-20	36	20	25 lbs.	17.95
XFC18-14	18 VCT	14	10 lbs.	6.95

All TXF Types are Tapped to Deliver 32, 34, 36 volts. XFC Type is Tapped to Deliver 16, 17, 18 Volts Center-tapped.

RECTIFIER CHOKES

Type No.	Hy.	Amps.	DC Res.	Price
HY5A	.028	5	20	$ 5.25
HY10A	.011	10	.04	9.95
HY20A	.007	20	.02	13.95

Opad-Green COMPANY
71-2 Warren St. New York 7, N. Y.
Phone: BEekman 3-7385-6

RADAR EQUIPMENT

APS-3 3cm Search Radar
APS-4 3cm Search Radar
SCR-717B 10cm Search Radar
SO-9 10cm Search Radar
APR-4 Receivers & Tuning Units
TS-12 Standing Wave Amplifier
Test Equipment and Signal Generators for 10 and 3cm

Write for Catalogue

LERU LABORATORIES, INC.
360 Bleecker St., New York 14, N. Y.
OREGON 5-3525

ELECTRONIC TUBE-MAKING MACHINERY

For manufacturing radio tubes, electronic tubes, cathode-ray tubes, lamps. New and used. Reasonably priced, satisfaction guaranteed.

AMERICAN ELECTRICAL SALES CO.
67 E. 8th St. New York, N. Y.

WHOLESALE ONLY

ELECTRONIC COMPONENTS
AIRCRAFT EQUIPMENT
HYDRAULICS

RADIO & ELECTRONIC SURPLUS
13933-9 Brush St. Detroit 3, Mich.
Phone Townsend 9-3403

D.C. MICROAMMETERS

0-200 ua 3" sq. G.E. DO-50	$ 8.00
0-100 ua 3" sq. G.E. DO-50	10.00
0-50 ua 3" sq. G.E. DO-50	13.00

R.F. MILLIAMMETERS

0-115 Ma 3¼" Weston 425	$12.00
0-100 Ma 3¼" Weston 425	12.00

PRECISION PORTABLE INSTRUMENTS

Single or multi-range

D.C. Microammeters, from 5 ua full scale. Thermo-couple Milliammeters, from 1.5 Ma. Thermo-couple voltmeters.

Precision Electrical Instrument Co.
146 Grand Street New York 13, N. Y.



CONDENSER SPECIAL

5—5 mfd—400 vdc Oil Cond.

3 terms, hot, mntgs flanged type. Dims. 3¾ x 3½ x 2. Tested at 1800v. Meets commercial specs. for 600v. operation up to 40 degrees C. Currently being used for power factor correction. Numerous applications for this high quality condenser. See symbol "F".

Price $.55—CARTON of 24 $.45

OIL CONDENSERS—New

Symbol	Capacity	Voltage	Type	Price
B	.001	50KV	#14F112	$30.00
B	.005-.005-.01	10KV	#26F344	3.50
B	.01	3000V		.50
Special	.02	20KV		10.50
E	.03	10KV	#26F380	7.75
B	.03-.03	2000V AC		.95
B	.1	1500V		.28
1 Term	.1	2000V		.32
E	.1	2500V		.60
G	.1	3500V		.55
G	.1	7000V	1 Term	.95
E	.1	7500V	#23F475	.85
B	.1	7500V	26F469	1.35
B	.1	10KV	#23F644	6.95
B	.1	15KV	#25F572	10.95
B	.1	20KV	#14F52	20.95
B	.2	10KV	#25F433	7.95
B	.25	3500V		1.30
E	.25	6000V	#23F659	1.25
B	.25	20KV		19.95
B	.4	10KV		8.95
D	.5	400V		.14
D	.5	600V		.16
F	.5	600V		.24
G	.5	1500V		.29
B	.5	2000V		1.25
B	.5	5000V		1.65
B	.5	25KV		29.95
B	.5—1	2000V		.89
B	.5—.5	600V		.24
B	.65	12.5KV		18.75
D	.75	1000V		.25
F	1	400V		.18
D	1	500V	#23F266	.24
E	1	500V	#23F225	.24
F	1	600V		.28
B	1	600V		.24

Symbol	Capacity	Voltage	Type	Price
B	1	1000V		.35
E	1	2500V	#23F121	1.25
B	1	15KV		17.75
B	1	20KV	#14F35	28.75
D	2	600V		.35
B	2	600V	#26F407	.38
G	2	600V	TLA	.45
B	2	1000V		.50
G	2	1000V	TLA	.60
B	2	2500V		2.50
B	2	4000V	#23F47	3.95
B	2	5000V		5.75
B	2-2	600V		.65
B	3	600V	Can	.39
B	3	4000V		5.25
B	3-3	1200V		.25
B	3-3	600V		.70
B	4	440VAC		.28
B	4	500V	#26F796	.55
B	4	5000V	#23F317	.69
G	4	600V	TLA (2) Terms	.69
G	4	600V	TLA	.69
B	4	1000V		1.15
B	5	600V		.59
B	5	1500V		2.75
B	6	600V		.74
B	7	600V		.79
B	7	800V		.89
B	8	600V		.95
G	8-8	600V		.95
B	8-8	600V		1.20
B	10	600V		1.10
B	10	1000V		2.50
B	13.5	220VAC		.90
B	15	1000V	TJ30040	7.65
B	42	600V	#25F673	4.95

Special Silver Mica Kit—100 @ $5.95 **Special Mica Kit—100 @ $2.95**

Price F.O.B., 25% with order. Balance C.O.D. Minimum order $2.00.

PRICES SUBJECT TO CHANGE WITHOUT NOTICE.

MONMOUTH RADI LABORATORIES

BOX 159 OAKHURST, N. J.

$59.50 ELECTRONIC RADIO ALARM

Make It Secure



Guaranteed new, functionally perfect and designed by a leading manufacturer. Uses balanced bridge principle. Intrusion operates any external alarm system. (Bell, horn, light, etc.) Automatic reset. Protects any ungrounded object, room or bldg. (Safe, cabinet, window screen, screening under window or door. Protection against injury by high voltage, hazardous equip and locations. Added feature includes built in fire detector. Operates alarm at 160 deg. F. Complete with instructions.

TYPE "J" POTS $.50

SYMBOLS: LS—Locking Type Shaft
S—Screwdriver, R—Round

Ohms	Shaft	Ohms	Shaft
50	1 4 S	20,000	1 1 4 R
200	1 8 LS	25,000	3 8 R
1000	1 8 LS	25,000	1 8 LS
1000	1 4 S	25,000	1 8 S
2000	3 8 LS	50,000	1 5-16 R
2500	1 2 R	50,000	1 8 S
2000	1 8 LS	50,000	1 4 S
3000	1 8 LS	50,000	1 8 LS
3000	1 2 R	100,000	1 8 LS
5000	1 8 S	100,000	1 2 R
5000	1 8 LS	100,000	1 0 R
10,000	1 4 S	100,000	1 8 S
10,000	3 8 R	150,000	2 1 8 R
10,000	1 8 LS	200,000	9 16 R
10,000	5 16	250,000	1 8 S
15,000	1 8 S	300,000 (2 Terms)	1 8 S
15,000	1 1 8 R	1 Meg	1 8 S
20,000	3 8 S	1 Meg	1 8 LS
20,000	1 8 LS		

TYPE "JJ" $1.00

2K	1 8 R	10K-50K 10K 2 term 1
1K-5K	3 8 R	1 2 R
100K	1 2 R	

BAKELITE TOGGLE SWITCHES

SPST 3A. 250V, 7/16" Bushing. Ball Handle (On-Off) ..... .18

SPST 3A. 250V, ¼" Bushing, ¼" SD shaft ..... .18

SPDT Type C H 8800 K4, 7/16" Bushing, Bat Handle (On-Off-On) ..... .34

DPST 3A. 250V, 7/16" Bushing, Bat Handle ..... .30

DPST Type C H 882 K4, 7/16" Bushing, Bat Handle ..... .35

DPDT 3A. 250V, 7/16" Bushing, ¼" Shank, ¼" Ball Handle ..... .44

DPDT Type C H 8824K4, 7/16" Bushing, Bat Handle ..... .48

COAX CONNECTORS

83-1SP	$.28	83-1J	$.64
83-1SPN	.28	83-1R	.28

FREQ. METER

Type BC—906 C

150—225 megacycles. Brand new. Boxed. Price $11.95

"AN" "K"

"AN"	"K"
3108	WK
3106	GK
3102	SK
3101	NK
3100	RWK

Connectors

MELLOMYNE

LARGE QUANTITIES

IN STOCK

What Types Do You Require?

FOR IMMEDIATE DELIVERY

WRITE—WIRE—PHONE

WILGREEN

74 Cortlandt St. N. Y. 7, N. Y.

BA-7-4862

GENERATOR: Output #1—1.5 v. a-c, 10.4 a, 90% P.F. 1200 watt, single phase, 800 cy. @ 2400 RPM. Output #2—28.5 v. d-c, 60 a. Size: 6¼" dia. 13½" O.A. length incl. ⅜" dia. splined shaft 2" long. Flange mounting. Wt. 42 lbs. Rotation counter clockwise viewed from drive end. Generators are self excited. Brand new in original boxes. Mfd. by Bendix. Special Price $27.50 ea. 2 for $50.00.

RECTIFIERS Copper Sulphide, F.W.B., 3.5 v. a-c in, 1.8 v. d-c @ 1 amp out. (Fine for 1.5 v. d-c filaments). New, boxed. $.60 each, 10 for $5.00, 100 for $40.00.

TUBES:

Discount 20% on orders over $50.00

1B22	$4.25	715B	6.50
1N21	.40	719A	9.50
2J62	37.50	721A	2.75
3B22	2.50	722A	7.50
250TL	19.50	724B	2.50
316A	.35	725A	8.50
368A	2.75	730A	15.50
700A	9.75	846	47.50
701A	3.50	872A	1.75
702A	2.75	878	1.75
703A	2.75	C8A	8.25
704A	1.00	C6J	4.75
707A	12.50	FG81A	3.75
707B	7.00	WE-	
708A	2.75	203A	8.75
713A	.75	VTVM	
714AY	3.75	(Br.)	12.50
715A	7.50		

SPECIAL: Rectigon, Westinghouse Battery Charger Tube, 6 amp. 65 v., Cat. #Z39414/JAN4B2B. New, orig. box. $1.50 each, 4 for $5.00.

Immersion heater. Westinghouse, low surface, 3 heat, oil type, 115 v. 200, 400, and 800 watt. 1¼" male pipe connection with calrod elements projecting 9". List $17.20. Our price $6.50 each, 2 for $10.00.

NEW!

- low prices
- values
- equipment
- components

Note: All merchandise not designated as new is guaranteed to be in excellent to new condition.

EPCO

1527 E. 7th St.
Los Angeles 21, Calif.

CAPACITORS: Fast, dual .25 mfd., 6000 v. d-c or .125 mfd., 12000 v. d-c. 3½" x 5" x 9¼" high including 2½" dual standoff insulators. New. Original packing. 4 per case. $2.95 each—4 for $10.00.

TRANSFAT. 115/230 v. 50/60 c., 0-260 v. 2½ amp. cont. 5 amp. max. output. New. Original packing. List $43.00. $17.50 each, 2 for $30.00.

NEW RA-38 RECTIFIERS

115 v., 60 cy. 1 phase input, output 0-15,000 v. d-c @ 500 ma. Write for detailed information.

THERMOSTAT SWITCH: Air or immersion—has ¼" pipe union connection with ⅝" dia. thermal element projecting 6". Temperature adjustable from 250° to 450°F. Switch opens one circuit, closes other as temperature changes. Cap. 1250 watts, 10a, 125 v.; 5 a. 250 v., 3 a. 460 v., 3 a. 600 v. Mfd. by Persons Model 502-3A. New original box. $1.95 ea.; 2 for $3.50.

TEST LEAD CLIPS: Frankel alligator type with barb for checking through insulated wire. New. Pkg. of 20 $1.00; $4.50/C; $30.00/M.

Filament Transformer

HIGH VOLTAGE FILAMENT TRANSFORMERS: Ametran Type W 5, .050 KVA, 50/60 c., 1 phase; 35 KV test, 12 KV d-c operating; sec. 5 v o-l @ 10 amps. Has sockets that takes 872A, 250T, 271, 5563 etc., rectifiers. Net Wt. 16 lbs. $12.50 each, 2 for $22.50, 4 for $40.00.

IT'S THE LAST OF OUR LUCKY BUYS!

It's the end! These and thousands of other items were bought at a fraction of their true worth—but it's the last of all Surplus buys everywhere because of Gov't. curtailments. When these are gone, there will be no more—so order now while present quantities last. Many items in stock not listed here — so send us your requirements.

TRANSFORMER "BUYS"
Prices Drastically Reduced!



FILAMENT TRANSFORMER
For hi voltage rectifiers. PRI: 115 V. 50/60 cy. sec: 5VCT @ 10 Amps. 25 KV. R.M.S. Test. 12 KV. 11/4" Operating. Uses 872A Tube or others. Brand New $9.95
872A Tube $1.49

110 V. 60 CYCLE PRIMARY TRANSFORMERS
5 V. 60 amps. fine for 304-TL's $8.95
5 V. 125 amps. for welding, pipe thawing $14.95
28 V. 100 amps. for welding, pipe thawing $19.95
40 Watt Modulation, Stancor A 3543 ..... $2.95
125 Watt Mod. Thordarson T-19M10 ..... $9.95

UTC LS 184 Power Transformer
1000 V. ct. 500 ma. Shipping Wt. 102 lbs. $69.50

UTC S-30 Power Transformer, 900 V. ct. 175 ma. CT. 2.5A; 6.3V. 5A; 6.3V. 5A $5.95
UTC S-31 Power Transformer, 1200 V. ct. 200 ma. 5V. 3A; 7½V. 3A; 6.3V. 3A $4.95
UTC S-32 Power Transformer, 1200 V. ct. 300 ma. 5V. 3A; 7½ V. 3A; 6.3V. 6A $6.25
UTC S-47 Power Transformer, 3000 ct. 2500 vt. 2000 ct. at 300 ma. $9.95

MIDGET VARIABLE CONDENSERS
priced at a fraction of cost

Hammerlund MC-20-MX	20 MMF	Double Spaced ..... 79¢
Hammerlund MC-50-SC	50 MMF	Double Spaced ..... 79¢
Hammerlund MCD-50-M	50 MMF	Split Stator $1.49
National SBD-50, 50-50 Split Stator		$1.49

BIG SAVINGS ON CHOKES
Send us your requirements. Prompt replies.
Thordarson Swinging Choke T-19 C38, 5-20H 500 ma $8.95
Thordarson 17C 00B, 12H, 200 ma $1.95

Big Shipment Just Received!
IMPULSE COUNTERS
Operates on 5 to 110 V., DC
$12.95

Used by laboratories and experimenters all over the world. Three separate dials count impulses from 1 to 10,000 in units of 1, 100 and 1000's. Excellent condition ... priced to go fast! Hurry!

COAXIAL CABLE CONNECTORS

M 359 T Connector	98¢
M 359 Angle Adapter	39¢
PL 274 Feed Through	98¢
PL 275 Twin Feed Thru	89¢
UG 1087 Twin Junction	69¢

BARGAINS ON NOISE FILTERS
Made especially for industrial use

Miller 7441, 5 amps	$4.95
Miller 7442, 10 amps	$5.95
Miller 7443, 20 amps	$6.95

Maximum 220 vc.
Check and compare these prices anywhere.

Brand New Famous Standard Brands OIL CONDENSERS

2 mfd 2500 v.	$2.49	12 mfd 1500 v.	$1.49
2 mfd 4000 v.	3.95	1 mfd 6000 v.	2.95
4 mfd 2500 v.	3.95	1 mfd 5000 v.	1.95
4 mfd 2500 v.	4.95	1 mfd 5000 v.	2.49
4 mfd 4000 v.	5.95	5 mfd 5000 v.	2.49

OHMITE POWER TAP CERAMIC SWITCHES
Non-Shorting type ceramic tap switches for high current use
Available in 5, 6, 7, 8, 9, 10, 11 and 12 positions. Your choice ..... 98¢ ea.
Ohmite 212-12 switch. 12 taps. Rated at 10 amps ..... $1.49 ea.

Just Received! Large Quantity of Brand New AMPHENOL AN CONNECTORS @ 75% off list! Write for complete listing!

Just Unpacked! Full Library of INSTRUCTION MANUALS

SCR 300A	$1	BC-312	$1
SCR 536 Handie Talkie	$1	SCR-435	$1
BC-191	$1	BC-1335	$1
SCR 508, 528, 538 Tank Set	$1	SCR-593	$1
Teletype Manual	$2	BC-79	$1
SCR-609, 610	$1	BD-71, 72	$1
RA 54	$1	I-72J	$1
		RM-29A	$1

All of the above shipped postpaid

T-85 APTS TRANSMITTER
Here's a real bargain! Priced complete with tubes. Used, but in excellent condition $39.50

Galvin TS-143/CPM-1 Synchroscopes
Outstanding precision instrument for any electronic lab. $175

TS 164/AR Frequency Meter
Airborne version of BC-221 with original calibration book. $75

WILLARD MIDGET 6V STORAGE BATTERY
$2.49

2 amp. hr. 2 x 1 1/8 x 2 3/4". Transparent plastic case. 3¾" at 12/16° ±2%° high. New. Use as standard electrolyte.

SIGNAL GENERATORS
Choice of 3
$77 ea.

I-222-A RF. Covers 2 bands — 8 to 15 mc., 150-250 mc. Can use up to third harmonic. Built-in 110 v. 60 cycle pwr. supply. Good condition. $77
I-126 15-26 mc. 95-130 mc. with built-in pwr. supply. Good condition. $77
I-126 15-26 mc. 130-235 mc. with built-in power supply. Good condition. $77

ORDER DIRECT FROM THIS AD
Prompt shipment of all orders. Cash with order. Minimum order $3.00. 25% deposit on all C.O.D. orders. Shipments by truck or RR Express collect. California buyers please add state sales tax. All prices subject to change. All merchandise subject to prior sale.

WRITE, WIRE OR TELEPHONE

ALVARADIO SUPPLY CO.

Dept. L-7. 341 S. VERMONT AVE., LOS ANGELES 5, CALIF. DUnkirk 8-2211

If You're Looking for **HIGH VOLTAGE HEAVY DUTY** Oil Capacitators

HERE'S YOUR "*BUY*"! BRAND NEW!

2 MFD 7500 V.D.C.
Manufacturer's List Price $151.00
Your Cost: **$39.50**



HEAVILY CONSTRUCTED THROUGHOUT. IN STEEL CASES WITH HUSKY INSULATORS. MADE BY A LEADING CONDENSER MANUFACTURER. YOURS AT A FRACTION OF REGULAR PRICE.

1 MFD 10,000 V.D.C.
Manufacturer's List Price $197.00
Your Cost: **$47.50**

2 MFD 12,500 V.D.C.
Manufacturer's List Price $265.00
Your Cost: **$79.50**

SPECIAL PURPOSE TUBES BRAND NEW. YOURS AT A FRACTION OF COST

W. L. 655-658 (Westinghouse) Reg. Price $241.00 **$95.00**
W. L. 652-657 (Westinghouse) Reg. Price $218.50 **$42.00**
827 R (R.C.A.) Reg. Price $171.00 **$59.00**

FREE WITH RADIO'S MASTER ORDER

OFFICIAL REFERENCE BOOK AND BUYING GUIDE
1951 Edition. 1200 pages. Publisher's price $5.50. All Manufacturers represented. SAVES TIME AND MONEY.

CABLE: FEDERPURCH
Federated Purchaser INCORPORATED
66 DEY ST., NEW YORK 7, N. Y. Digby 9-3050

ALLENTOWN, PA. 1115 HAMILTON ST. | NEWARK, N. J. 114 HUDSON ST. | EASTON, PA. 701 NORTHAMPTON ST.

"STANDARD" BRAND NEW SPECIALS

AMERTRAN TRANSTAT VOLTAGE REGULATOR. 2KVA. Pri: 90 to 130V. 50/60 CPS. Output: 115V @ 17.4A. Maximum. Type RH. ..... $24.95 ea.
GENERAL RADIO VARIAC 200B. 1½ KVA. 115V input. 0 to 115V, or 0 to 135V output. 2 Amp. without knob or dial plate ..... $8.95 ea.
POWER TRANSFORMER. STANCOR. Pri: 115V 50/60 CPS. Sec: 700V CT @ 100 MA; 5V CT @ 3A; 6.3V @ 2.5A. Hermetically sealed rectangular can. 4½"W x 4¾"D x 6"H. ..... Special $2.45 ea.
AUTO TRANSFORMER. RAYTHEON. Pri: 230V. 60 CPS. 1750V. RMS test. Sec: 115V, 26A. 7"W x 10"D x 10"H. Open frame construction. ..... $19.95 ea.
INTRA SYLVANIA SILICON CRYSTAL DIODE. 10,000 MC. detector. Navy inspected. Individually boxed. ..... 98¢ each
10 for $9.00
250 MM PRECISION VERNIER CALIPERS. Inside and outside. Reads to 1/50 MM. Jaw depth 62 MM. Highest quality construction, supplied with leatherette plush lined case. American Measuring Instruments Corp. Model 38. ..... $11.95 ea.
MB BOAMMETER. TYPE BX-35 WESTINGHOUSE. 0-200 ac. 2" square case. 2" rectangular INTHOUSE. 0-500 ma. 2" rectangular ..... $4.95 ea.
All items brand new, fully guaranteed. F.O.B. our plant N. Y. C.

Send for latest catalog, listing one of the largest surplus stocks, hundreds of hard to get items at lowest prices. Meters, fuses, fuse holders, switches, condensers, jacks, plugs, connectors, cables, etc., etc.

STANDARD RADIO-ELECTRICAL PRODUCTS

2260 WASHINGTON AVENUE
NEW YORK 57, NEW YORK
JUDSON 6-3764

WESTON 666-1C
Socket Selector
TEST SET
FOR
Vacuum Tube Circuit
Selective Analysis

This unit is designed for the purpose of taking readings of currents, voltage resistance and other electrical measurements in a vacuum tube circuit. It can be used with most analyzers or volt-ohm-milliammeters to determine tube and circuit conditions and characteristics under operating conditions.

To test a circuit the connecting cable is plugged into the appropriate tube adapter which in turn is plugged into the tube socket. The tube itself is plugged into the socket selector & adapter unit which is equipped with two series of numbered pin jacks. All the currents and voltages are thus brought out from these pin jacks by means of connecting jumpers & leads to the volt-ohm-milliammeter where they may be measured.

An ideal test unit which greatly simplifies circuit trouble shooting. IT CAN CONVENIENTLY BE USED IN CONJUNCTION WITH OSCILLOSCOPES OR SIMILAR TEST EQUIPMENT AND IS ESPECIALLY SUITED FOR T. V. AND SIMILAR VACUUM TUBE CIRCUITS.

Complete unit consists of 15 Adapter pin leads and jacks also a thoroughly illustrated instruction booklet with Tube Base Data, Connection & Chart. LIST PRICE $30. **A REAL VALUE** **$9.50**

ALL ITEMS ARE BRAND NEW-SURPLUS-GUARANTEED. All materials shipped from stock same day as order received, subject to prior sale.

AIRCRAFT METERS

• All meters listed are 2½" Square flush type, 4 hole mounting with black scale and luminous markings. They are self contained or supplied with external shunt, unless noted otherwise.

5-0-5 D.C.M.A., GENERAL ELECTRIC DW-55, 10 sc. div., no numbering. Caption "Bottomside", with illum. feature @ **$3.50**

30 VOLTS D. C., GENERAL ELECTRIC DW-53 @ **$4.50**

30 VOLTS D. C., WESTON 606 @ **$4.50**

40 VOLTS A. C., WESTON 517, 2½" Rd. flush metal case, 2 hole mtg. calib. for 400 cycle use @ **$3.50**

40 VOLTS A. C., WESTINGHOUSE NA-33, 2½" Round flush metal case, 2 hole mtg. calibrated for 400 cycles @ **$3.50**

40 VOLTS A. C., WESTINGHOUSE NA-33, 2½" Rd. fl. metal case, 2 hole mtg. (These were orig. calib. for 400 cycle but have been adjusted for 60 cycle @ **$3.95**

30 AMPS D. C., WESTINGHOUSE AX-33 USN-C2301, in shunt @ **$5.00**

30-0-30 AMPS D. C., WESTON 606, with internal shunt @ **$5.00**

60-0-60 AMPS D. C., WESTON 606, comp. with external 50 M. V. shunt @ **$5.50**

20-0-100 AMPS D. C., HICKOK, 2½" Round flush metal case, 2 hole mounting, complete with external 50 M. V. shunt (A. C. type D-2) @ **$5.50**

120 AMPS D. C., WESTINGHOUSE AX-33, complete with external 50 M. V. shunt @ **$5.50**

120-0-120 AMPS D. C., WESTINGHOUSE AX-33, complete with external 50 M. V. shunt @ **$5.50**

150 AMPS D. C., WESTINGHOUSE NX-33, 2½" Round fl. metal case, 2 hole mtg., complete with external 50 M. V. shunt (A. C. type F-1) @ **$5.50**

240 AMPS D. C., SUTTON-HORSLEY Br. complete with external 50 M. V. shunt @ **$5.50**

240 AMPS D. C., WESTINGHOUSE AX-33, complete with external 50 M. V. shunt @ **$6.50**

240-0-240 AMPS D. C., GENERAL ELECTRIC DW-53, complete with external 50 M. V. shunt @ **$6.50**

300 AMPS D. C., WESTINGHOUSE, 3½" Rd. flush metal case, complete with external 50 M. V. shunt (A. C. type E-1) @ **$7.50**

480 AMPS D. C., WESTINGHOUSE AX-33, complete with external 50 M. V. shunt @ **$8.50**

30 VOLTS 30 AMPS D. C., DUAL METER weston 606, complete with external 50 M. V. shunt, normally indicates amps, with push button for volts @ **$6.00**

30 VOLTS 60 AMPS D. C., DUAL METER GENERAL ELECTRIC, AN connector type, complete with external 50 M. V. shunt, & connector, normally indicates amps, with push button for volts @ **$5.50**

30 VOLTS 120 AMPS D. C., DUAL METER, WESTINGHOUSE AX-33, comp. with ext. 50 M. V. shunt normally indicates amps, push button for volts @ **$6.00**

30 VOLTS 120 AMPS D. C., GENERAL ELECTRIC, AN connector type, complete with external 50 M. V. shunt & connector, normally indicates amps, with pushbutton for volts @ **$6.00**

30 VOLTS 240 AMPS D. C., WESTINGHOUSE AX-33, complete with external 50 M. V. shunt normally indicates amps, with push button for volts @ **$7.50**

Orders accepted from rated concerns, public institutions and agencies on open account, others please send 25% deposit, balance C.O.D. or check with order. All prices FOB our warehouse, N.Y.C.

MARITIME SWITCHBOARD
338 Canal St., N. Y. 13, N. Y.
Worth 4-8217

EAST COAST RADIO CO.
811 Main St.
Jacksonville 6, Fla.
Phone 5-1259

Condition: New or in Excellent condition.
Terms: Payment in advance or 20% deposit—balance COD.

FOB Jacksonville—subject to prior sale, prices subject to change without notice.

BC 797	VHF 50 Watt Xmtr-AM Tower to Aircraft. Complete with constant voltage transformers. 110 v. 60 cy.	$400
Model 155A	RCA Oscilloscope, like new	75
Model 224	Dumont Oscilloscope, tested	150
TS 251	Loran Test set, complete w. xtal	115
TS 45	Rdr. Test set	250
Model 18B	Ferris Signal Generator-Microvolter	125
Model 18D	Ferris Signal Generator 8-210 mc	180
Model 18F	Ferris Signal Generator 25-230 mc	225
Model 102F	Boonton Signal Generator	275
TS 174/U	Allen G. Cardwell Freq meter-20 to 250mc	220
TS 164/AR	Contains BC 221-AH—without modulation	150
TS 164/AR	Contains BC 221-AJ—with modulation	185
EM	Frequency Meter, Navy type 125 to 20,000 kc	175
ER-1	General Radio Primary standard-guaranteed, operating	1,750
IE 19	Test Set for set SCR 522	165
IE 36	Test Set for set SCR 522	35
W-110B	Field Telephone Wire—1 mile (reels, unused)	9
RTA 1B	Complete low Xtals	175
BC 788C	Complete with tubes and dynamotor	45
APS 4	Radar, complete	1,200
SF 1	Radar, complete w. 150 ft waveguide	1,350
AN/CPN6	Radar Beacon, complete and crated	3,500
TS 170	IFF Test Set	85
TUBES	Surplus, Tested and Guaranteed. 40% off list-large or small quantities. When ordering specify maximum and minimum quantities you will accept.	

SURPLUS EQUIPMENT

INVERTER UNIT PE 218



Output: 115 VAC; Single phase; PF .90; 380/500 cycle; 1500 V.A. Input: 25-28 VDC; 92 amps; 8000 rpm; Exc. volts 27.5; Leland Electric mfg.

BRAND NEW **$29.95**

ONAN MOTOR GENERATOR SET MG 075-G-1

Generator 115 VAC; 5.3 Amps; 6KW; PF 1.0; Also 26 VDC; 100 watt; 480 cyc; 3.8 Amps. Driven by 115-230 VAC — 2hp motor; 60 cycle; single phase; 3450 rpm; 19.5 amps

BRAND NEW **$195.00**

POWER TRANSFORMER

Primary 125 volts tapped at 105 and 115 volts, 50 to 425 cycles. Secondaries: 5.1 V. at 3.0 amps; 325-0-325 V. at 0.175 amps; 5.4 V. at 8 amps; 6.4 V. at 10.3 amps; 2.5 V. at 5.0 amps; 4500 V. at .005 amps 2.5 V. and 4500 V. windings insulated for 6000 Volts. All other windings insulated for 1500 Volts. Cost gov't more than $42.00 . . . a real bargain at

(Removed from new equipment) **$4.95 ea.**

HEAVY-DUTY POWER TRANSFORMERS

Primary 120 Volt 50-60 Cycle Secondary 425-0-425 @ 418 mils
6.3 Volts at 5 amps
6.3 Volts at 3 amps
5.0 Volts at 3 amps
Shipping Wt. 15 lbs.
Removed from new equipment
Special at **$4.95 ea.**

RESISTORS, Precision; Glass Covered, Hermetically Sealed

12 Megohms, 10 watt **$2.50 ea.**

2000 Ohms, 25 watt, wire-wound. Grade 1, Class, Style D. Removed from new equipment **$1.00 ea.**

ALL EQUIPMENT F.O.B. PASADENA • PLEASE SEND FULL AMT. WITH ORDER

C and H Sales Company
BOX 356-E, EAST PASADENA STATION • PASADENA 8, CALIFORNIA

CALLING ALL ENGINEERS!

TELEVISION CAMERA

3150 line resolution. Easily converted to present RMA standards. Circuits available with camera. Complete, like new.

We Have:

APS-4 & APS-6 RADAR
WIDE RANGE OF TEST SETS
SUCH AS:
TS-62/AP TS-35/AP
TS-36/AP TS-12/AP (Units 1 & 2)
TS-13 TS-108
TS-117 WAVE METER
I-177 HICKOK TUBE
CHECKER
PLUS: Complete Line of Test Equipment

WE ARE LOOKING FOR: ALL TYPES OF RADAR, GROUND and AIRCRAFT RADIO EQUIP.

We Want: BC-348 ART-13
ARC-1 RTA-1B
MN-62 R5A/ARN7
BC-1000

TELL US WHAT YOU HAVE.
TELL US WHAT YOU NEED.

COLUMBIA ELECTRONICS LTD.
524 S. SAN PEDRO ST.
LOS ANGELES 13, CALIF.
Cable Address: COLLECT

WESTINGHOUSE HIPERSIL CORES

OVER 20,000 UNITS IN SEVERAL DIMENSIONS. AVAILABLE FOR IMMEDIATE DELIVERY. SEND FOR LIST WITH COMPLETE DESCRIPTIONS.

RAYTHEON MFG. CO.
Surplus Sales Dept. Waltham, Mass.
Tel. Waltham 5-5860—Ext. 2

Do You Use CLAMPS

AN-3057—

3—4—6—8—10—12—16

Priced From 10¢

David Greenberg
74 Cortlandt St. N. Y. 7, N. Y.
WO 2-3064

MILLIONS OF RESISTORS

½-1-2 Watts

FOR THOSE IMMEDIATE REQUIREMENTS

LIFE ELECTRONIC SALES
345 Broadway DI 9-4154 N. Y. 13, N. Y.

MIRROR — front surface aluminized on optical glass 1 3/16" diameter 3/32" thick ..... $.50

PRECISION LEVEL — interior ground tube level with 4 adjusting screws. Overall length 1⅞", diam. 15/32". One end with shoulder ⅛" diam. $.85

DELCO BLOWER — sirocco type D.C. Flange diameter 3¼" blade 2-3/16" RPM @ 12 volts 3400 RPM @ 6 volts 1600 ..... $3.95

SELENIUM RECTIFIERS — G.E. model 8S8 5FB8 maximum A.C. volts 56 D.C. amps. 0.150 ..... $1.25

CIRCUIT BREAKER — 10 amp. 30 volt D.C. C-H Cat. #8751K4.... $1.10

GLASS VIAL — to use as a permanent level on equipment $1.00

Miniature lamp T1¾. 3 volt .19 amp. Airplane Indicator, Amb. Ctd.
10 for ..... .85
100 for $7.50

Lamp Assembly C203 Genl. Made by Eastman Kodak with Iris Diaphragm .12 volt lamp ..... each $1.95

WATTHOUR METER SINGLE PHASE — G.E. type I-18 two wire 5 amp. 115 volt 60 cycle $5.75

SEND FOR FREE BULLETIN

Telephone Digby 9-2188-9

A. Cottone & Company — ELECTRONIC MECHANICAL & OPTICAL COMPONENTS
286-290 CANAL ST., NEW YORK 13, N.Y.

ALL PRICES F.O.B. N. Y. CITY

HIGH VOLTAGE
RF POWER SUPPLIES
For INDUSTRIAL USE and PROJECTION TELEVISION
EMBASSY ENGINEERING CO.
224 East 204 St., N.Y.C.

I-208 FM Signal Generators

A limited number of this finest available laboratory instrument is offered subject to prior sale. Specifications are:

Range: 1.0-4.5 mc. & 19-45 mc.
Deviation: 0-5 kc. each side of center frequency in first range and 0-50kc. each side in second band.
Modulation: internal 150, 400, 1000, 2500, or 5000 c.p.s. Provision for external source.
Accuracy: 0.3% with aid of internal 500kc. crystal calibrator.
Output: up to 100,000 microvolts calibrated with internal V.T.V.M., .84 volts uncalibrated.
Termination: 30 ohm line.
Power source: 12 volts dc or 115 volts 60 cycles.

Further details can be obtained by writing

F-8-7718, Electronics
330 W. 42nd St., New York 18, N. Y.

An Investment!

Productive advertising is an INVESTMENT rather than an EXPENDITURE.

"Searchlight" advertisers almost invariably report prompt and satisfactory results.

BE CONVINCED — send us your advertisement TODAY.

Address Classified
Advertising Division
ELECTRONICS
330 W. 42nd St., New York 18, N. Y.

GIANT VALUES

HAYDON synchronous motor—110 Volt 1/2 RPM Brand new $1.47 each. Minimum order six pieces. Lot of 100 big discount.

BRAND NEW

Weston Model 641 Wattmeter
0-4 KW Scale 6 Adj.
200-250 Vts. FL. Black
20 Amps Normal
Price $23.85

Relays, Oil Condensers and other electronic material available. Send your inquiry.

UG CONNECTORS.

UG 9/U	$0.75 each
UG 36/U	10.00 each
UG 107/U	2.00 each
UG 234/U	10.00 each
UG 250/U	10.00 each
UG 59A/U	1.45 each
UG 61A/U	1.15 each
83 1H	.09 each
83 1SPN	.45 each

NO RISK TO YOU
ALL MATERIAL OFFERED BRAND NEW:

LEONARD GREENE
381 Tremont St., Boston, Mass.
Phone: HAncock 6-4794

Have available for quick sale; 2 Universal ±104 Multiple Coil Winding Machines.
ELECTRONIC TRANSFORMER CO., INC.
207 West 25th St., New York 1, New York

BRAND NEW U. S. GOV'T. SURPLUS GUARANTEED

POWER RHEOSTATS

Ohms	watt	ea.	Ohms	watt	ea.
5	25	.98	150	50	1.76
2	225	8.10	150	150	3.51
3	100	2.93	200	25	.98
3	225	8.10	200	150	3.51
4	225	8.10	225	50	1.76
5	50	1.76	250	25	.98
5	100	2.93	350	25	.98
5	150	3.71	350	100	2.74
6	25	.98	375	150	3.51
6	50	1.76	400	25	.98
7	25	.98	500	25	.98
8	50	1.24	500	75	4.05
10	25	1.56	585	150	3.51
10	100	2.74	750	25	1.56
12	25	1.56	750	150	3.71
15	25	.98	1000	25	1.76
16	50	1.76	1200	225	8.10
22	50	1.76	1250	50	1.85
25	25	.98	1250	150	3.71
32	300	5.27	1500	50	1.85
50	25	.98	2000	25	1.76
50	50	1.76	2000	50	1.24
50	750	17.75	2500	100	2.93
60	25	.98	3000	25	.98
75	150	3.51	3000	100	2.93
80	50	1.76	5000	25	1.85
80	600	7.61	5000	50	1.95
100	25	.98	7500	50	1.95
100	50	1.24	7500	100	3.32
100	225	8.10	10000	50	1.95
125	25	.98	10000	100	3.51
125	600	7.61	20000	150	6.31

Specify whether shaft required is for knob or screwdriver adjust.
Discount to Quantity Users.

SELECTOR SWITCHES

Pole	Pos.	Deck	Type	Each
1	6	1	Bak-shtg	.51
1	11	1	Bak-n shtg	.58
1	12	1	Cer-n shtg	.55
1	24	3	bak-n shtg	.69
1	24	3	bak-n shtg	.79
2	2	1	cer-shtg	.39
2	6	2	bak-n shtg	.49
2	8	2	bak-shtg	.54
2	11	2	bak-shtg	.60
4	4	2	cer-n shtg	.54
4	11	4	bak-shtg	1.20
5	3	2	cer-n shtg	.75
6	11	6	bak-n shtg	1.95
10	5	5	cer-shtg	1.49
12	2	3	bak-shtg	.75
16	2	4	bak-n shtg	.95

(many other types in stock)

"AN" CONNECTORS

LARGE VARIETY AVAILABLE AT GREAT SAVINGS
Send your specs and let us quote

BIRTCHER TUBE CLAMPS

#926-A	**25c.**	#926-B22
#926-A1		#926-B1
#926-B		#926-C1
#926-B1		#926-C3
#926-B2		#926-C10
#926-B3		#926-C24

OIL CONDENSERS

Mfd	VDCW	Each
.1	3000	.75
.1	6000	1.59
.1	20,000	19.95
.25	3000	1.10
.5	1500	.89
1	600	.49
1	2000	1.95
2	400	.49
2	600	.59
2	1000	.79
4	600	.98
6	400	1.05
6	600	1.15
10	600	1.49
14	600	2.49
15	600	2.79
15	1000	3.75
2x 1	7000	4.95
2x 5	9000	16.95

BATHTUBS

mfd	vdcw	ea.
.033	400	.19
.05	200	.19
.05	400	.22
.05	600	.26
.1	400	.24
.1	600	.27
.1	1000	.35
.15	600	.27
.25	200	.22
.25	600	.28
.35	400	.25
.5	400	.28
.5	600	.30
.5	1000	.39
1	200	.35
1	600	.40
2	400	.46
2	600	.69
4	50	.25
8	500	.59
.25	50	.31
.25	75	.33
.40	25	.30
.50	25	.31
200	12	.40
300	6	.45
.05-.05	600	.33
.05-.05	1500	.55
.1-.05	200	.25
.1-.1	400	.32
.1-.1	600	.34
.16-.16	600	.34
.2-.2	600	.34
.25-.25	600	.34
.5-.5	600	.39
1.0-.1	300	.35
200-200	9	.55
3 x .05	600	.37
3 x .1	600	.42
3 x .1	600	.47
3 x .25	600	.50
3 x 1.0	100	.49

Specify Top, Side, or Bottom Lugs.

"UG" Connectors

UG-13/U	$1.10
UG-13A/U	1.49
UG-18/U	1.15
UG-19/U	1.15
UG-21/U	.98
UG-22/U	1.05
UG-24/U	1.10
UG-27/U	1.15
UG-27A/U	1.75
UG-37/U	.89
UG-58/U	.65
UG-123/U	.40

TYPE "J" POTENTIOMETERS

TYPE "J" 75c			TYPE "JJ" $1.75		$1.95
ohms	ohms	ohms	ohms		ohms
60*	1500†	25K†	100-100*		100K-100K*
100†	2000*	30K†	200-200†		100K-100K†
200†	2000†	50K*	500-500*†		150K-150K†
300†	4000†	75K†	600-600†		250K-250K†
400*	5000*	100K*	1500-1500†		350K-500††
500*	5000†	100K†	2000-2000*		350K-25K†
500†	10K*	200K*	2000-2000†		500K-500††
600†	10K†	200K†	2200-25K†		500K-500K†
750†	15K*	250K*	20K-2000†		800K-75K†
1000*	20K*	250K†	25K-10K†		1meg-1meg†
1000†	20K†	1meg*	35K-5000†		2meg-2meg†
1500*	25K*	2meg*	50K-50K†		5meg-5meg†

TYPE "JJJ" $2.95

ohms	ohms
20K-200K-20K†	750K-750K-750K†
45K-27K-250††	800K-800K-800K†
700K-700K-700K†	1meg-1meg-1meg†

* 1/4" screwdriver slotted shaft.
† Knob type shaft.

TRANSMITTING MICAS



Type 9 Type 4

mfd	vdcw	type	ea.	mfd	vdcw	type	ea.
.00001	600	4	.18	.00162	600	4	.18
.00003	600	4	.18	.002	600	4	.20
.00005	600	4	.18	.002	1200	4	.48
.00005	2500	9	.31	.0022	2500	9	.78
.0001	600	4	.18	.0025	600	4	.23
.0001	2500	9	.31	.003	600	4	.25
.000152	600	4	.18	.0039	600	4	.25
.0002	600	4	.18	.005	600	4	.25
.00025	600	4	.18	.005	1200	9	.60
.0005	600	4	.18	.005	2500	9	1.18
.0051	2500	4	.43	.0062	600	4	.30
.0007	600	4	.18	.01	600	4	.40
.0008	600	4	.18	.01	600	9	.49
.0009	600	4	.18	.01	1200	9	.98
.001	600	4	.18	.0142	600	4	.45
.001	1200	4	.31	.02	600	4	.55
.001	1200	9	.31	.02	1250	9	1.36
.0013	600	4	.18	.027	600	4	.60
.0015	600	4	.18	.043	600	4	.99

"UHF" CONNECTORS

83-1AC 83-1AP 83-1P

Cat. No.	Army No.	Each	Per C.
83-1AC		.42	.39
83-1AP	M-359	.35	.28
83-1P	PL-259	1.25	1.00
83-1T	PL-274	1.10	.90
83-1R	SO-239	.40	.35
83-1SPN	PL-259A	.40	.35
83-2R	SO-264	.50	.40

Open Accounts to Rated Concerns
Prices net FOB our whse NYC.
SEND FOR BARGAINGRAM #503

ALEXANDER MOGULL CO., INC.
161 Washington St. N Y 6 N. Y. WOrth 4 0865

WAR EQUIPMENT MAIL SALE!

SAVE up to 70%

on Electronic, Radio, Mechanical Equipment!

For home experimenters, laboratories, schools, etc. New fully guaranteed. Fraction of original cost. 100s of items including:

- 2500-watt A.C. Power Plants $279.00
- G.E. Selsyns (pair) 3.39
- Rathbon 110-v Electronic Timer 8.94
- Meg-A-Lite Continuity Condenser 110-v Tester 1.99
- Register, Capacitor Asst. 4 lb. 1.89
- City Desk Telephones 5.96
- Photo Cell Light Control Kit 4.67
- Other bargains—Compressors, Paint Spray Guns, Engines, Pumps, Tools, etc.

18 yrs. in business in Lincoln. Satisfaction Guar. We prepay all shipments.

Card brings catalog, 1000s bargains.

BURDEN SALES COMPANY
842 "O" St. Lincoln, Nebr.

LARGE QUANTITIES of *RADIO TRANSMITTING TUBES*

TYPE	PRICE	PACKING
807	$1.59	IN CARTONS
805	$3.50	" "
813	$6.50	" "
1622	$1.49	" "

SUBSTANTIAL DISCOUNTS ON LARGE ORDERS

All tubes are brand new standard brands. This offer subject to change without notice and prior sale. Terms: 25% deposit with order balance C.O.D. $25.00 dollars minimum order.

MANUFACTURERS:
WANT MORE EXPORT SALES? CONTACT: MICHEL LEVIT
METROPOLITAN OVERSEAS SUPPLY CORPORATION
Manufacturers and Distributors of Electronic Products
1133 BROADWAY Phone Chelsea 3-1105 **NEW YORK 10, N. Y.**

"TAB"
THAT'S A BUY

TUBES

Tested—Guaranteed

All Tube Prices Subject To Change Without Notice. Write for Qty. Prices.

OA2	$3.20	1Z2	3.98	5C36	CSB	8.49	6F5	83	7C6	1.62	14W7	1.33	NR74	29	710A	8011	69	1614	22	9-3	.49
OA3 VR75	1.33	2A3	1.60	5D21		24.50	6F6	1.65	7C7	1.62	14X7	1.33	75	83	713A		1.00	1635	1.49	10-48	.49
OA4G	1.33	2A4G	2.40	5J23		13.45	6F7	1.60	7C23	69.00	20	14Y4	1.20	HY75A	4.59	715A		7.98	1641	RK60	9.98	13-4	.49
OA5	3.55	2A5	1.10	5J29		12.60	6F8G	1.60	7S5	1.291	15E	1.17	76	83	715B		7.98	2050	1.80	20-4	.49
OB2 VR90	1.33	2B2	1.33	5J32		99.00	6G6G	1.33	7S6		15H	49	77	83	715C		24.98	2051	.89	K49A	.36
OC3 VR105	.98	2A7	1.33	5R4GY		1.50	6H6	1.49	7S7		15R	3.98	78	83	715C			61	R3430	36.00	K55B	.36
OD3		2D4	1.33	5T4		1.72	C6J	4.98	7S7		15R	98	79	1.33	720CY		45.00	5514	4.95	M55B	.36
OV VR150	1.33	2D7	1.33	5U4G		1.65	6J4	6.98	7T8		19	1.60	80	1.35	721A		2.19	5516	5.85	L62A	.49
OZ4	1.49	2B22 GE 5579	73	5V4G		2.40	6J5GT	1.50	7G7	1.232	19BG6G	6.00	81	1.95	722A	287A	9.95	5517		K80B	.36
O3A	6.50	2E22 1642	81	5W4		.83	6J6	2.90	7H7		19J6	3.20	FG81A	4.45	723A/B		9.98	CK1015	1.89	VR121A	2.95
O3A	.65	2E22 7193	89	5X4G		.90	6J7	1.60	7J7		19T8	2.90	82	1.33	725A	B	14.98	5656	18.90	C37b	2.98
1A3	1.10	2E26	15	5Y3GT		1.25	6J8G	1.60	7K7		20	1.17	82V	1.39	726A	B	2.98	5658	4.23	ZB588	3.98
1A4P	1.85	2C34 RK34	21	5Y4		.75	6K5G	2.16	7L7		20A	6.98	83	1.33	725A		6.39	5812	2.99	S76	.29
1A5GT	.90	2C39	25	9R	5Z3	1.62	6K6GT	1.65	7N7		20P1	4.98	83V	1.33	726A		6.39	6053	5.98	Mazda Pilots	
1A6	1.78	2C40		6.90	5Z4	1.33	6K7	1.49	7N7		21A	4.85	84 6Z4	90	726C		29.98	8012A	1.25	44, Box 10	.50
1A7GT	1.80	2C43	29.50	C6A		1.60	6K8	1.49	7Q7		21EP35	2.33	85	1.10	730A		9.89	8013A	7.98	49, Box 10	.60
1B3 8016	2.65	2E45			6A5	1.60	6L6	1.33	7S7		23		89	1.33	801A		29	8020	1.25	55, Box 10	.50
1B4P	1.95	446A	16.95		6A8	1.60	6L6	3.20	7T7		23P4	2.39	PJ22	1.55	CR1C		1.49	VR92	25.80	57	.50
1B5 25S	1.49	2E46	1.20	6A	6A7	1.65	6J4	2.61	7W7		24A	1.33	24A	1.80	HY24		1.39	FG104	14.98	803		2.89	9002	2.25	S6-T4 3W	.18
1B7GT	1.60	2C50	3.69	6A7		1.00	6L6GA	2.61	7W7		24G	1.10	FG105	8.89	804		6.98	9003	2.79	100W 28V	.25
1B21 471A	2.85	2C51	5.90	6A8GT		1.00	6L7	1.98	7X7		24P4	1.33	24G 3G24	69	805		3.59	9004	2.39	291, Box 10	.36
1B24	4.32	295	1.16	6A8T	1853	1.42	6N7GT	1.25	7Z4		25A6	1.33	25A6	1.60	HY114B		1.25	807	2.39	9005 RC4B	1.95	311 28V	.15
1B25	2.65	2E48			6A8	1.60	6N8	1.60	8A7		25A7	1.33	25A7	3.27	HY115	165	57	808		9006	15	313 28V	.15
1B26	4.85	2E49			6A8	1.33	6N7	1.49	7Y4		25A7GT	1.90	SC5GT	1.95	811L7		1.95	809	2.45	C Ray Tubes		323 3V	.10
1B27	7.85	2E24	4.50	6A7		2.90	6N7	1.00	12A6		25B5	1.10	25B5	1.39	HY87GT		1.95	811	11.96	2AP1	3.55	Sylvania No	
1B29	.84	2E30 HY615	4.29	6A8GTW		1.33	6N7GT	1.33	12A7		25B6	1.33	25B6	2.49	HY87GT		1.45	811	2.29	2AP5	7.98	6W 120V	.15
1B32 532A	1.73	2E36	5.38	6AD5		1.19	6N8	1.49	12A8GT	1.00	FG27A	6.89	2050 WT2	1.69	832A		10.64	5HP14	2.59	3AP1	4.69	Wotghs C7	
1B37	45.00	2E30	2.35	6AD6G		1.00	6N7	1.65	12AH7GT	1.33	28D7		CE 06	3.15	836		1.98	3JP1	1.95	50	1.20V	.09
1B38	34.00	2J21	10.75	6AD7G		1.60	6N7	1.60	12AU6	1.00	30	1.00	111 VT4C	1.57	837		1.29	3JP12	19.98	Dialco Type e	
1B40	4.95	2J21A	10.75	6AE5		.89	6N8GT	2.65	12AT6	1.50	HY3Z	4.59	RX21S	9.95	838		2.21	4AP10	4.70	Chromed Less	
1B41	69.95	2J22	9.75	6AF5G		.89	6N7GT	1.65	12AT7	2.90	31		WE215A	25	842		2.75	5AP1	5.75	Bulb 59¢;	
1B42	7.50	2J26	9.39	6AF6G		1.33	6N8TY	1.20	12AU6	2.00	32	1.75	227A	2.65	843		.39	5BP1	2.25	2 for 98¢	
1B46	3.69	2J27	12.69	6AG5		2.65	6N8	1.00	12AU7	1.40	32L7GT	4.85	231	2.95	845		5.98	5BP4	4.50	Tel Slide	
1B53	49.95	2J31	12.75	6AG7		2.88	6N07GT	1.45	12AV6	1.50	34L7GT	1.66	250TH	18.75	851		29.98	5CP1	1.75	Lamps	
1B54	49.95	2J32	12.50	6AH6		1.90	6N8S	.83	12AV7	2.90	35	1.66	250TH	18.75	860		5.70	5CP7	3.70	6 12 24 48	
1B56	49.95	2J33	18.45	6AJ5		2.29	6N8T	1.00	12AV6	2.65	FG33	7.85	2B/H	8.49	861		9.85	5EP7	1.26	55V ea	1s
1B59	12.95	2J37	19.95	6AK5		3.90	6N8GT	2.00	12AX7	2.40	36	1.66	304TH	18.75	866		1.98	5HP1	2.49	Xtal Diodes	
1B60	4.95	2J37	12.80	6AK6		2.00	6N8TGT	2.00	12BA6	1.80	35 5G1	1.00	304TL	4.98	865		5.70	5HP11	6.95	IN21	1.80
1C5GT	1.10	2J38	6.75	6AL5		2.00	6N8T	1.65	12BA7	2.48	35A5	.90	307A RK75	6.45	866A		9.98	5HP1	4.95	IN21A	2.00
1C6	1.60	2J39	19.63	6AL7GT		1.33	6N8X7GT	1.50	12BD6	2.00	35B5	2.00	310A	6.98	866Jr		1.04	5HP4	6.75	IN21B	2.60
1C7G	1.60	2J48	12.70	6AN5		2.00	6N13CT	2.40	12BE6	1.80	35C5	2.00	316A	29.50	PJ23		1.90	6J5T	39.95	IN22	2.00
1D5GP	1.95	2J49	38.70	6AQ5		2.00	6N7GT	2.20	12BE6	1.65	35L6GT	1.49	323A	8.98	869		25.98	5JP2	11.75	IN23	2.40
1D7G	1.60	2J50	29.50	6AQ6		.90	6N7MGT	2.90	12BH7	2.40	35W4	2.00	327A	2.50	872A		1.29	5LP1	11.89	IN23A	2.50
1D8GT	1.95	2J51	9.50	6AQ5GT		2.40	6N8GT	1.80	12BL6	1.49	35Y4	1.65	350	1.49	GL872A		2.98	5MP4	4.75	IN23B	3.75
1D21 SN4	6.00	2J56	81.00	6AR5		1.65	6S8T	1.80	12J5	98	35Z3	1.66	350B	1.65	874		.38	5NP1	3.98	IN25	4.80
1E5GP	1.95	2J61	24.45	6AR6		4.58	6S8GT	.90	12J5	.90	35Z4GT	.75	355A	14.15	878		1.95	7BP7	4.65	IN26	5.20
1E7G	1.95	2J62	45.00	6AS5		2.00	6S7T	1.33	12J6G	1.80	35Z5GT	1.50	371B	98	884 6Q5G		1.45	7CP1	12.95	IN27	3.50
1F4	1.33	2K25	24.95	6AS6		1.39	6S7GTY	1.33	12J8GT	1.00	REL36 6J4	54	388A	6.98	885		1.98	7DP4	16.45	IN28	3.50
1F5G	1.41	2K28	36.98	6AS7G		6.75	6SV7	1.45	12J7GT	1.00	36	1.33	388A	1.69	930		2.70	9GP7	8.89	IN32	15.00
1F7G	1.95	2K29	29.95	6AT6		1.50	6T7G	1.60	12K7GT	83	37	.90	393A	3.45	922		1.19	9LP7	10.98	IN34	.75
1G4GT	1.33	2K39	89.50	6AU5GT		2.90	6T8	1.60	12K8	1.90	38	1.10	394A	4.95	923		.77	10BP4	19.49	IN35	1.95
1G5G	1.33	2V3G	49	6AU6		2.00	6T4GT	2.40	12K8GT	1.59	39 44	1.33	395A	4.95	927	CE25	1.20	10BP4	19.98	IN46	.89
1G6GT	1.33	2W3GT	98	6AV5GT		1.33	6U5 6G5	1.00	12Q7GT	90	CRC40	54	FP400	7.98	929		1.33	12DP7	12.45	IN48	.70
1H4G	1.10	2X2	49	6AV6		1.50	6U6GT	1.06	12S8GT	98	41	83	WL414	63.95	930		90	12GP1	49.98	IN51	.70
1H5GT	1.33	2X2A	1.92	6AW8A		2.65	6U7G	1.60	12SA7GT	1.62	42	1.62	837	9	954		39	12GP7	12.75	IN53	.95
1H6G	1.60	3A4	32	6AX5GT		1.35	6V6	3.20	12SC7	1.10	43	83	GL434	2.69	955		49	12JP4	27.00	IN63	.98
1J5G	1.20	3A5	1.25	6B4G		1.60	6V6GT	2.00	12SF5GT	1.00	45S VT52	18	446A 2C40	1.19	956		39	12KP4	34.00	Thermistors	
1J6G	1.60	3A8GT	2.40	6B5		1.60	6V6GTY	2.45	12SF5GT	89	45Z5	90	446B	1.75	957		39	12LP4	24.35	D16?019 Vol	
1L4	1.00	3B4	3.49	6B6		1.10	6W6GT	1.80	12SH7	1.00	45Z5	90	450TH	29.95	958		39	12QP4	52.00	Limiter 2.95	
1L4A	1.33	3B5	98	6B7		1.60	6W6GT	1.80	12SH7	98	46	1.33	450TL	44.25	SD968		1.98	12RP4	36.00	D16?591	3.7
1L6	1.33	3B7 1291	29	6B8G		1.42	6W5GT	75	12SJ7GT	1.65	47	1.20	GL451	1.90	991		36	15DP4	56.00	Thermal	
1L4	1.33	3B22	45	6BA4		1.33	6W7G	1.33	12SK7	1.49	48	1.33	460			FM1000	1.20	16AP4	49.00	Comp 1.00	
1L5	1.33	3B24	3.75	6BA6		1.60	6X4	1.50	12SL7GT	1.09	50	1.95	HF200	13.95	KU1005		49	16DP4	49.00	D17?B3B HF	
1L6	1.33	3B25	4.75	6BA7		1.20	6X5GT	1.50	12SN7GT	2.20	EF50	69	WL468	5.89	CK1006		64	16FP4	57.50	Pwr Meas 90	
1L15	1.33	3B28	7.85	6BC5		2.00	6Y5	1.85	12SQ7GT	1.50	50A5	1.98	RH507	9.95	CK1007		89	16RP4	49.98	1C Bulb Time	
1L16	1.33	3C2A XXB	1.60	6BD6		1.06	6Y6G	2.40	12SR7	1.50	50C5	1.40	527	6.98	1049		3.90	16TP4	69.50	Delay 90	
1L6S	1.41	3C23	5.85	6BE6		1.80	6Y7G	98	12X4	90	50C5	1.50	530	12.69	CK1090		2.69	19AP4	96.00	Varistors	
1L14	1.33	3C31 CIB	3.45	6BF6		1.49	6Z5 12Z5	1.15	12Z3	1.33	50C6	1.28	WL531	3.75	R1100		5.00	19CP4	85.00	CW20259	
1L5N	2.39	3C45	12.95	6BG6G		4.50	6Z7G	1.95	14A4	1.33	50L6GT	1.65	GL534		R1130H		12.00	90S	2.45	1 SN 38C	2.95
1N5GT	1.80	Mtr 1299	29	6BH6		1.10	6Z9 2Y5G	1.10	14A7 12B7	1.98	50X6	1.10	1N21	3.89	R1231Z		5.39	91A	2.49	WTG-4U1	1.50
1N6G		3D21A	1.98	6B16		2.00	7A4 XXL	1.00	14AB7		50YGT6	90	544	4.98	HY1269		8.39	912	89.98	Xtal Freq	
1P5GT	1.33	3E29	10.98	6BQ6GT		3.20	7A5	1.10	XXD	1.26	50Y7GT	1.00	GL546	1.69	1273		1.15	916A	45.00	Stds	
1P21	84	3F4	1.35	6BW6		1.65	7A6	90	14B6	98	51	1.33	564P1	19.95	1284		1.15	Tungar Bulbs	100Kc	7.98	
1Q5GT	1.33	3D4	1.98	6C5GT		83	7A7	1.62	14B8	1.10	56	90	575A 975	12.65	1609		5.98	29X672	200Kc	3.98	
1Q3G	69.00	3Q5GT	2.16	6C6		.89	7A8	90	14C5	1.33	57	1.00	601B	.19	1613 6F6X		1.06	18P04AGE	3.49	1000Kc	2.95
1R4 1294	1.33	3S4	1.98	6C7		1.26	7AD7	2.39	14C7	1.20	58	1.00	HY615	.15	1614		1.35	859483	3.98	4700Kc	.98
1R5	1.80	3S4	1.98	6C8G		1.49	7AF7	90	14E6	1.10	58	1.75	WL459	18.50	1616		.75	Ballast		5000Kc	3.98
1S4	1.20	4C33	81.00	6C21		19.62	7AG7	98	14E7	1.33	RK61	.39	1P1		40 Htr Oven Xtals						
1S5	1.62	4C35	34.98	6C36		2.00	7AH7	1.10	14E7	1.10	RK65	24.95	WL632A	8.98	1620		4.95	PM3	90	5010 5025 5055	
1T4	1.10	4E27 257	12.39	6CD6G		6.00	7B4	1.62	14F5	1.33	HY69	4.95	701A	2.90	1622		1.75	PM4	98	Kc. Ea. 14.98	
1T5GT	1.33	4J31	95.00	6CH4		2.75	7B5	1.62	14H7	1.20	70A7	4.95	702A 702B	2.90	1624		1.85	4A1	1.29	Tubes Gtd Exc	
EU4 5910	1.00	4J42 700	29.85	6D6		83	7B6	1.62	14J7	1.33	70L7GT	1.95	703A	3.98	1625		49	PM5	98	Open Fil &	
1U5	1.62	4J47	260.00	6D8		1.60	7B7	90	14N7	1.33	71	1.00	704A	2.98	1626		49	6-11	49	B'kage Via	
1V	1.50	4J52	250.00	6E5		1.10	7B8	1.60	14Q7	1.33	72	1.00	705A 8021	65	1629		39	PM6	98	R F Cap Only.	
1V2	1.50	4T4 2	9.95	6E6		1.90	7C4 1203A	.33	14R7	1.33	CRP72	1.37	707A	9.98	1632		77	PM7	98	Mtn Tube .	
1X2	2.65	5C22	59.95	6E7		1.20	7C5	.79	14S7	1.33	73	1.67	707B	24.98	1633		.75	PM8	98	Order $5.	

INFRA-RED SNOOPERSCOPE

[illegible] Tube. [illegible] only $4.95
Two for [illegible]

PulseXfmr [illegible] & SineWaveXfmr [illegible]
Ratio for [illegible] PermalloyCore Mfr.
WE [illegible] VT-52 [illegible] $1.95

115 VOLT 60 CYCLE XFORMERS

1500DV Dbl [illegible] $13.95
1000VCT 150ma. 7.5vct 3Amp or 6.3vct 5Amp $3.98
Ma. Sat. Choke, 4 Hy. 8 ohms, 250ma. $3.98
300ohm 10Wa. $4.50 2x300wt/100Wa. 9Dc
Sr. 60 Amps $6.98 Sr. 115 Amps $12.95
2x5v 12A or Wnds 12 Kvlts $8.98
24v/6a c.t. $5.00 24v 2a c.t. $1.59
LineAutoFormer 300 VA $4.95
Mtns wAline toGrid [illegible] UTC 0-14

CONSTANT VOLTAGE REGULATORS

180 Watts 105VAC [illegible] $10.95
[illegible] $19.95
5-Digit Elec Counters 24V [illegible] $7.98
Sr. Rotary Solenoids 24v 6a [illegible] $7.98

115V 60cyc Relays—Famous Mfrs

CLARE A [illegible] $2.98
CLARE [illegible] $3.98
SDUNN [illegible] $1.98
WECO [illegible] $1.98
[illegible] $10.95
MLV P'Flash Pwr Kit [illegible]
[illegible]
[illegible] $17.98
[illegible] $26.98

FILTER CHOKES

13.5Hy 1Amp/42 ohm/17 Kvlts [illegible] $54.00
88Hy/150ma New/TC cr/old TRF [illegible]
2 for $1.98
12Hy/300ma, Cst $3.95
35Hy/40ma, Cst 1 for $1.00
30Hy/125ma [illegible] $1.95
Dual 2Hy/300ma 2/1.98, 10Hy/30ma 59¢
10Hy/200ma Cst HiVolts Ins [illegible] $1.95

MODULATION & AUDIO XFMRS

MODUL 240Watts Pwr, 10 Pair50's to PP565's, RF/2000ohmLoad STANCOR [illegible] $6.95
OUTPT 500Watts 8000ohm to 500ohm 60ohms [illegible] Kvlts AMERTRAN $12.95
UNIV OUTPT 12Watts Any Tube Any Vc UTAH [illegible] $1.39

LINE FILTERS

10Amp 130vac/dc Cst, USN [illegible] Mc's $1.29
10Amp 250vac Cst, USN [illegible] $3.98
50Amp 600 vdc/250 vac [illegible]
Five 50/Pk Bars of Line SOLAR Emi-/-O Stat [illegible] NEW $8.98 2 $18 $.59
110Amp usable 110vac/dc GE [illegible] CAL 2 for $1.98

CIRCUIT BREAKER SPECIALS

Heinemann/Mag/Elec Amps: 0.22 [illegible] Ea. $1.49
Klixon Thermal/Push/Button Bars of Line Amps: 5 [illegible] Ea. 79¢
Sq D & CH Toggline Bkrs Amps: 5 [illegible] Ea. 89¢

MICA TRANSMITTING and INDUSTRIAL CAPACITORS

Mfd.	Each	Mfd.	Each
250 VDC		3000 VDC	
.05	$.39	.005	$1.35
.1	.59	.006	1.49
1500 VDC		3500 VDC	
.04	.75	.00025	.65
.05	.90	5000 VDC	
2000 VDC		.00025	.75
.005	.90	.00052	1.35
.006	.98	.0001	1.49
.006	1.05	.00015	1.89
.01	1.09	.0002	1.98
.015	1.19	.0002	2.09
.02	1.59	.0003	2.29
	1.99	.00043	2.55
2500 VDC		.0005	2.98
.0025	.90	.001	3.29
.005	1.35	.005	3.69
3000 VDC		.01	3.98
.00025	.65	8000 VDC	
.0005	.90	.0006	3.49
.0025	.95	.001	3.69
.005	.98	.002	3.98
.0052	1.49	Others—Write	

TYPE G—Heavy Duty, Cylindrical

Mfd.	Kv Amps	Ea.	Mfd.	Kv Amps	Ea.
.02	3Kv	22A	$42.98	.0035	3Kv 20A	$7.29
.005	5Kv	20A	6.49	.00330	Kv 14A	7.49
.0015	6Kv	4A	4.29	Others, Write		

SUBMINIATURE TUBES

Never Before At These Low Prices:

2E31	$1.39	CK538AX	.89
2E32	1.19	CK538DX	.89
CK501AX	1.29	CK539DX	.98
CK501X	1.49	CK540DX	.98
CK503AX	1.89	CK542DX	.98
CK503X	1.89	CK543DX	.98
CK505AX	1.29	CK544DX	.98
CK506AX	1.29	CK545AXA	1.98
CK509AX	1.29	CK5678	1.98
CK512AX	1.29	CK5678	2.48
CK522AX	1.29	CK5697	2.98
CK525AX	1.39	CK5702/CK605CX	
CK526AX	1.98		.98
CK529AX	1.98	CK5703	1.25
CK531DX	.98	CK5704	1.98
CK532DX	.98	CK5744/CK619CX	
CK533AX	1.98		2.98
CK534AX	.89	CK5784	3.59
		CK5875	1.98

NEW—GERMANIUM CRYSTAL DIODES

Type	Replaces	Each
CK705	1N34, 1N42, 1N48	$ .27
CK706	1N60, 1N64	.54
CK707	1N47, 1N63	1.80
CK708	1N38	1.80
CK709	1N40	1.80
CK710	1N21B, 1N28, 417	1.35

SUBMINIATURE DIODE PROBE Tube, Unsurpassed for UHF Tuning. 6.3 volt Htr. VB92. Ea. 25¢; 5 for $1.00

"TAB" — Specialists in Industrial Electronic Equipment. Tell Us Your Needs. Write for Your Free "TABOGRAM"

"TAB" THAT'S A BUY — "TAB" THAT'S A BUY

DEPT. 11E SIX CHURCH ST. NEW YORK 6, N.Y., U.S.A. — CORNER CHURCH & LIBERTY STS. ROOM 200

"TAB": Money Back Guarantee (Cost of Mdse Only). $3 Min. Order FOB NYC. Add Shpg. Charges & 25% Deposit. Phone: wOrth 2-7230. Prices Subject to Change.

INDEX TO ADVERTISERS

Accurate Paper Tube Co. 265
Accurate Spring Mfg. Co. 168
Acme Electronics 263
Aeronautical Communications Equipment, Inc. 156
Airpax Products Company 140
Alden Products Co. 231
Allen-Bradley Co. 189
Allen Co., Inc., L. B. 277
Allied Control Company, Inc. 181
Allied Radio Corp. 254
Allison Radar Corporation 259
Altec Lansing Corporation 259
American Chronoscope Corporation 180
American Lava Corp. 21
American Microphone Co. 172
American Phenolic Corporation 138
American Screw Company 50
American Television and Radio Co. 242
American Time Products, Inc. 145
Ampex Electric Corporation 266
Andrew Corporation 182
Antara Products, Division of General Dyestuff Corporation 22, 23
Anti-Corrosive Metal Products Co., Inc. 172
Arma Corporation 247
Arnold Engineering Company 167
Art Wire & Stamping Company 240
Assembly Products, Inc. 272
Audio Devices, Inc. 131

Ballantine Laboratories, Inc. 150
Barker & Williamson, Inc. 198
Barrett Varnish Co. 272
Barry Corporation 62
Bead Chain Manufacturing Co. 164
Beaver Gear Works Inc. 180
Belden Manufacturing Co. 44
Bell Telephone Laboratories 205
Bendix Aviation Corporation
Pacific Division 233
Red Bank Division 165
Berkeley Scientific Company 260
Bird & Co., Inc., Richard H. 273
Bird Electronic Corp. 270
Birtcher Corporation 266
Biwax Corporation 257
Bliley Electric Company 210
Boonton Radio Corporation 125
Borg Corporation, George W. 272, 273
Bowser, Inc. 244
Bracke-Sieb X Ray Co., Inc. 261
Breeze Corporations, Inc. 269
Bridgeport Brass Co. 237
Browning Laboratories, Inc. 216
Burgess Battery Company 238
Burlington Instrument Co. 164
Burnell and Company 39

Cambridge Thermionic Corp. 176
Cannon Electric Development Co. 184
Capitol Radio Engineering Institute 236
Carboloy Company 16
Carnegie-Illinois Steel Corp. 159
Centralab, Div. Globe-Union Inc. 11, 12, 13, 14
Chicago Transformer, Div. of Essex Wire Corp. 196
Cinch Manufacturing Corp. 117
Cleveland Container Company 187
Clippard Instrument Laboratory Inc. 249
Cohn Corporation, Sigmund 234
Communications Accessories Company 226
Condenser Products Company 7
Consolidated Engineering Corporation 58
Cornell-Dubilier Electric Corp. 49
Corning Glass Works 183
Cornish Wire Company, Inc. 190
Cossor (Canada) Limited 168
Coto-Coil Co., Inc. 238
Cramer Co., R. W. 190
Cross Co., H. 272

Dano Electric Company 269
Daven Co. Third Cover
De Jur Amsco Corporation 57
Dial Light Company of America 148
Distillation Products Industries 175
Dollar Company, Robert, The Communication Equipment Division 271
Donnelly Electric & Mfg. Co. 139
Dow Corning Corporation 272
Driver Co., Wilbur B. 10
Driver-Harris Company 192
Dumont Electric Corporation 253
Du Mont Laboratories, Inc., Allen B. 15, 199
du Pont de Nemours and Co., Inc., E. I. 169

Eastman Kodak Company
Industrial Photographic Div. 137
Eitel-McCullough, Inc. 45
Elsicr Engineering Company, Inc. 140, 272
Electric Indicator Co. 265
Electrical Industries, Inc. 253
Electrical Reactance Corp. 143
El-Tronics, Inc. 272
Electronic Associates Inc. 250
Electronic Instrument Co., Inc. 243
Electronic Tube Corporation 242

Electro Motive Mfg. Co., Inc. 2
Electro Products Laboratories 261
Electro Tec Corporation 269
Emsco Derrick & Equipment Co. 274
Enthoven & Sons Ltd., H. J. 156
Erie Resistor Corp. 53

Fairchild Camera & Instrument Corp. 176,224
Fairchild Recording Equipment Corporation 272
Falstrom Company 268
Federal Telecommunication Laboratories, Inc. 17
Fidelity Chemical Products Corp. 144
Filtron Co., Inc., The 19
Fisher-Pierce Company, Inc. 266
Fisher Radio Corp. 233

Gamewell Company 168
Gates Radio Company 38
General Ceramics & Steatite Corp. 30, 31
General Electric Company
Apparatus Dept. 54, 55, 151, 179, 214, 225
Electronics Dept. 20, 37, 163
Lamp Dept. 186
General Industries Co. 177
General Radio Company 195
Glaser Lead Co., Inc. 162
G-M Laboratories Inc. 263
Graphite Metallizing Corp. 246
Green Instrument Co. 263
Grieve-Hendry Company 250
Guardian Electric Mfg. Co. 157

Handy & Harman 249
Hart Mfg. Co., The 127
Hathaway Instrument Co. 245
Haydon Mfg. Company, Inc. 204
Heath Company, The 211
Helland Research Corporation 255
Helipot Corporation 25
Hermetic Seal Products Company 238
Hewlett-Packard Company 8, 9
Hickok Electrical Instrument Co. 202
Houghton Laboratories, Inc. 240
Hudson Wire Company 176
Hytron Radio and Electronics Corp. 51

I-T-E Circuit Breaker Company 59
Industrial Condenser Corp. 265
Instrument Electronics 248
Instrument Resistors Company 264
International Nickel Company, Inc. 158
International Rectifier Corp. 202
International Resistance Co. 4, 5

J F D Manufacturing Co., Inc. 202
Jelliff Manufacturing Corporation, C. O. 275
Johnson Co., E. F. 233, 246
Jones Div. Howard B. Cinch Mfg. Corp. 233

Kahle Engineering Co. 244
Karp Metal Products Co., Inc. 52
Kartron 272
Kenyon Transformer Company, Inc. 148
Kepco Laboratories, Inc. 135
Kester Solder Company 121
Knight's Co., James 251
Kollsman Instrument Div., Square D Company 191

Lambda Electronics Corporation 259
Lamokin Laboratories, Inc. 227
Lavoie Laboratories, Inc. 133
Leach Relay Co. 166
Lectrohm Incorporated 238
Leeds & Northrup Co. 48
Lewis Engineering Co. 244
Lewis Spring & Manufacturing Co. 146
Liberty Mirror Division, Libby-Owens-Ford Glass Co. 241
Littelfuse, Inc. 202
Lord Manufacturing Company 142

Machlett Laboratories 203
Magnecord, Inc. 235, 247
Magnetic Core Corp. 265
Magnetics, Inc. 144
Mallory and Company Inc., P. R. 64, 119
Marconi Instruments, Ltd. 172
MB Manufacturing Company, Inc. 209
McGraw-Hill Book Co. 164
Measurements Corporation 52
Mercoid Corporation 266
Metal Textile Corporation 251
Metaplast Products, Inc. 252
Mica Insulator Company 26, 27
Millen Mfg. Co., Inc., James 35
Milo Radio & Electronics Corp. 154
Miniature Precision Bearing Inc. 272
Minneapolis-Honeywell Regulator Co. Industrial Division 147

The NEW
-PRECISION-
SERIES EV-20

VTVM and Multi-Range Test Set

TRUE ZERO-CENTER on ALL VTVM ranges
PLUS Direct Reading High Frequency Scales

48 RANGES TO
1200 Volts*, 2000 Megohms, 12 amperes, - 63DB
*D.C. VTVM ranges to 12,000 and 30,000 volts when used with Series TV Super-High Voltage Test Probe

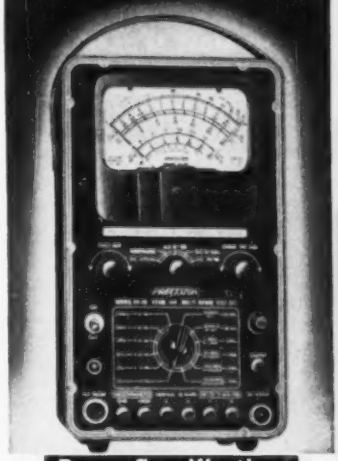

Range Specifications

★ SIX ALL-ZERO CENTER VTVM RANGES: — 13½ Megs. Constant Input Resistance. ± 3, ± 12, ± 30, ± 120, ± 300, ± 1200 volts. Direct Reading to ± 12 KV and ± 30 KV with Series TV Super-High Voltage Test Probe.
★ SIX SELF-CONTAINED OHMMETER-MEGOHMMETER RANGES: 0-2000-200,000 ohms. 0-2-20-200-2000 Megohms.
★ FOUR DIRECT READING HIGH FREQUENCY VTVM RANGES: 0-3-12-30-120 volts. (When used with RF-10A High Frequency Vacuum Tube Probe, Net Price $11.40. No crystal rectifiers employed.)
★ SIX AC-DC AND OUTPUT VOLTAGE RANGES at 1000 ohms/volt. 0-3-12-30-120-300-1200 volts.
★ EIGHT D.C. CURRENT RANGES: 0-300 microamps. 0-1.2-3-12-30-120-1200 milliamps. 0-12 Amperes.
★ SIX DECIBEL RANGES from — 20 to + 63 DB. Calibrated for 600 ohm, 1 mw., zero DB reference level.

Important Features

★ VOLTAGE REGULATED — BRIDGE CIRCUIT
★ DIRECT READING, ALL ZERO-CENTER VTVM eliminates frequent and inefficient shifting of test leads.
★ HIGH FREQ. VOLTAGE SCALES — DIREST READING.
★ DUAL-BALANCED ELECTRONIC BRIDGE OHMMETER-MEGOHMMETER.
★ 4½" RECTANGULAR METER — 200 microamperes, ± 2%. Double-Sapphired, D'Arsonval construction.
★ 1% Film type, Metallized and Wire-Wound resistors.
★ Heavy gauge, louvred steel case with plastic handle. Etched, anodized, aluminum panel.

Net Selling Price $68.25

Complete with coaxial Circuit Isolating Test Probe, Shielded Ohmmeter Test Cable, Standard Test Leads, Ohmmeter battery. Case dimensions — 10½" x 6¼" x 5".

Also ask to see the "Precision" Series EV-10, DeLuxe VTVM—Megohmmeter with extra-large 7" meter. 59 Self-contained ranges to 6000 volts and 70 DB, on display at leading radio parts distributors.

Write for latest catalogue.

Precision Apparatus Co., Inc.
92-27 HORACE HARDING BLVD.
ELMHURST 10, N. Y.

Export: 458 B'way, N.Y.C., U.S.A. Cables: MORHANEX
In Canada: Atlas Radio Corp. Ltd., Toronto, Ontario

INDEX

TO THE MOST SKILLFULLY MADE COIL COMPONENTS IN THE INDUSTRY

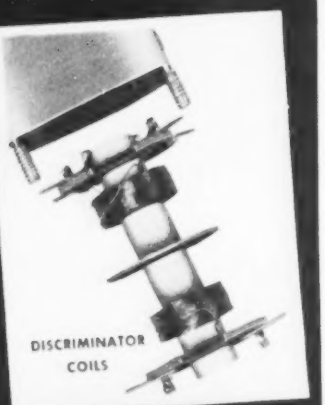

Whether your coil requirements include one of the super-fine quality coils shown above, or one of the various coil types listed in the index below, you can feel certain that U. S. Electronics' advanced engineering and progressive production methods can make them—to your specifications — with greater precision and economy than virtually any other coil manufacturer on the market today.

Cathode Trap Coils
I. F. Transformers
Width Control Coils
Heater Choke Coils
Video Peaking Coils
R. F. Coils
Horizontal Linearity Control Coils
Horizontal Oscillator Coils
Oscillator and Solenoid Coils
Sound Discrimination Transformers
Sound I. F. Transformers
Picture I. F. Transformers

Write us for engineering samples to your specifications.

USE

united states electronics
CORPORATION
LYNDHURST • NEW JERSEY

Minnesota Mining & Mfg. Co. 201
Mitchell-Rand Insulation Co., Inc. 173
Moulnee Paper Mills Company 158
Muirhead & Co., Ltd. 3
Murex Ltd. 260
Mycalex Tube Socket Corp. 36

National Company, Inc. 144
National Moldite Company 232, 242
National Varnished Products Corporation, The 141
Ney Company, J. M. 152
North American Aviation, Inc. 152
Northern Radio Co., Inc. 263
Northern Zaleski, Limited 47

Panoramic Radio Products, Inc. 257
Paper Machinery & Research, Inc. 255
Paramount Paper Tube Corp. 246
Park Metalware Co., Inc. 240
Peerless Electrical Products Division Altec Lansing Corporation 160
Permoflux Corp. 222
Pfanstiehl Chemical Company 265
Phillips & Hiss Co., Inc. 273
Plastics & Electronics Co. 277
Polarad Electronics Corporation 33
Potter Instrument Co., Inc. 275
Precision Apparatus Co., Inc. 307
Precision Paper Tube Co. 148
Premax Products, Div. Chisholm-Ryder Co., Inc. 233
Presto Recording Corporation 194
Progressive Mfg. Co. 256
Pyramid Electric Co. 60
Pyroferric Co. 266

Radio Corp. of America 29, 171, 208, 230
Back Cover
Radio Receptor Company, Inc. 213
Rahm Instruments, Inc. 236
Railway Express Company, Air Express Division 254
Rauland Corporation 42
Raytheon Manufacturing Co. 129
Reimler Company, Ltd. 264
Revere Copper & Brass Inc. 28
Richardson Company 21
Robinson Aviation, Inc. 269
Rome Cable Corporation 239

Sangamo Electric Company 221
Scientific Electric Div. of "S" Corrugated Quenched Gap Co. 274
Scintilla Magneto Division of Bendix Aviation Corp. 56
Scovill Manufacturing Co. 271
Shallcross Mfg. Co. 43
Shure Brothers, Inc. 188
Sierra Instruments, Inc. 63
Simpson Electric Company 18
Societe Industrielle ALFA 272
Sorensen and Company, Inc. 46
Specialty Battery Company 240
Sperry Gyroscope Company 119
Spinner, Inc. 240
Sprague Electric Company 123
Stackpole Carbon Co. 207
Standard Piezo Company 236
Standard Pressed Steel Co. 253
Standard Telephones and Cables Limited 260
Standard Transformer Corporation 234
Stayer Company, Incorporated 240
Stelma Mfg. Co., Wm. 176
Stevens Arnold Inc. 268
Stewart Manufacturing Co., D. M. 250
Stoddart Aircraft Radio Co. 161
Stupakoff Ceramic & Manufacturing Co. 170
Superior Electric Co. 185
Superior Tube Company 215
Sylvania Electric Products, Inc. 61
Synthane Corporation 40, 41
Syntron Co. 263

Tech Laboratories 152
Technology Instrument Corp. 218
Tektronix, Inc. 270
Telechron, Inc. 197
Telefunken Laboratory, Inc. 277
Television Equipment Corp. 249
Tennes Engineering, Inc. 192
Tempering Company, L. H. 228
Thomas & Skinner Steel Products Company 160
Transitoll Corporation 267
Transradio, Ltd. 242
Triplett Electrical Instrument Co. 229
Turner Company 206

Ungar Electric Tool Co., Inc. 236
Unique Devices, Inc. 273
United States Electronics Corporation 308
United States Steel Corp. 159
United States Testing Company, Inc. 275
United Technical Laboratories 257
United Transformer Co. ..... Second Cover
Universal Mfg. Co., Inc. 261

Varflex Corporation 223
Varian Associates 220
Veeder-Root, Inc. 219
Vickers Electric Division, Vickers Inc. 6
Victoreen Instrument Company 262

Ward Leonard Electric Company 174
Ward Products Corp. 237
Waters, Robert A., Inc. 140
Westinghouse Electric Corp. 155
White Dental Mfg. Company, S. S. 178, 251
Whitehead Stamping Company 236

PROFESSIONAL SERVICES 276

SEARCHLIGHT SECTION
(Classified Advertising)

EMPLOYMENT
Positions Vacant 278, 279, 280, 281
Positions Wanted 280
Selling Opportunities Wanted 280
Employment Agencies 280
Employment Services 278, 279

SPECIAL SERVICES 280
Contract Work 280

NOTICES
Auction 282
Legal 277

EQUIPMENT
(Used or Surplus New)
For Sale 280-306

WANTED
Equipment 280

ADVERTISERS INDEX

Alexander, F. 280
Alvarado 302
Selling Opportunities Wanted 280
American Electrical Sales Co. 300
American Tectron Society 278, 280
Arrow Sales, Inc. 289
Illan 300
Boulevard Engineering Personnel 280
Brooks Co., Inc., B. D. 280
Burden Sales Co. 305
C & H Sales Co. 303
Celab 280
Collins Radio Co. 279
Columbia Electronics, Ltd. 304
Communications Equipment Co. 283, 284, 285
Compass Communications Co. 298
Cornell Aeronautical Laboratory, Inc. 278
Cottone & Co., A. 304
Cunningham Engineering Co. 280
East Coast Radio Co. 303
Electro Impulse Laboratory 292
Electronic Engineering Co. of Calif. 281
Electromicraft, Inc. 291
Electronic Transformer Co., Inc. 303
Embassy Engineering Co. 304
Empire Electronics 240
Engineering Research Assoc., Inc. 279
EPCO 303
Federated Purchaser 303
Finnegan, Helen 280
Fried Instrument Div. — Bendix Aviation Corp. 281
Goodyear Aircraft Corp. 279
Green, Gould 280
Greenberg, David 304
Greene, Leonard 303
Grossman & Co., T. R. 282
Horlick Co., William L. 296
Hughes Aircraft Co. 279
Instrument Associates 286, 287
Lectronic Research Laboratories 297
Legri S. Co., Inc. 288
Lenz Laboratories, Inc. 300
Life Electronic Sales 304
Maritime Switchboard 303
Maxson Corp., The W. L. 279
Metropolitan Overseas Supply Corp. 305
Mogull Co., Inc., Alexander 303
Monmouth Radio Laboratories 301
National Union Research Div. 279
Oped-Green Co. 300
Ostby & Barton Co. 280
Peak Electronics Co. 299
Precision Electrical Instrument Co. 300
RCA Service Co., Inc. 281
Radio & Electronic Surplus 300
Radio Corp. of America — R.C.A. Victor Div. 279
Radio Ham Shack, Inc. 293
Raytheon Manufacturing Co. 304
Reliance Merchandising Co. 295
Servo-Tek Products Co., Inc. 294
Sonotone Corp. 278
Standard Oil Co. of Calif. 279
Standard Radio-Electrical Products 302
Tab 299, 306
Taub Co., The 280
Telemarine Communications Co. 298
Tinsett Associates 280
Universal General Corp. 304
Victor-Bernard Industries 280
Wells Sales, Inc. 290
Westinghouse Electric Corp. 278, 281
Wilgreen 301

This index is published as a convenience to the readers. Every care is taken to make it accurate, but ELECTRONICS assumes no responsibility for errors or omissions.

POWER AND IMPEDANCE MEASUREMENTS

DAVEN

OUTPUT POWER METERS

of unexcelled accuracy and reliability

have many applications

The DAVEN Output Power Meters are designed to measure the actual power delivered by an audio signal system to a given load. However, because of the characteristics of the circuit, they are admirably suited to other applications, namely:

1. Determination of Characteristic Impedance of an A.C. Source.
2. Effects of Load Variation on a Signal System.
3. Transmission Line Equalization Measurements.
4. Measurement of Insertion Loss in Multi-channel filter and other complex circuits.
5. Filter and Transformer Measurements.
6. Radio Receiver Measurements.

The equipment shown on this page is built to DAVEN'S well-known standards of precision. Please write for more detailed data. Let our engineering department help you on specific problems.

TYPE OP-182



Impedance Range: 2.5 ohms to 20,000 ohms. Remains essentially resistive over frequency range of 30 to 10,000 cps. Accuracy ±5%.

Power Range: 0.1 mw. to 5 watts in steps of 0.1 mw.

Indicating Meter: Calibrated from 0 to 50 milliwatts and from 0 to 17 db. —Zero level: 1mw.

Meter Multiplier: Will change reading of indicating meter by ratios of 0.1:1, 1:1, 10:1, 100:1, or decibel reading by —10, 0, +10, +20.

TYPE OP-961



Impedance Range: 2.5 ohms to 20,000 ohms. Remains essentially resistive over frequency range of 30 to 10,000 cps. Accuracy ±2%.

Power Range: 0.1 milliwatts to 50 watts in steps of 0.1 milliwatts.

Indicating Meter: Calibrated from 1 to 50 milliwatts and 0 to 17 decibels. Zero level: 1mw.

Meter Multiplier: Extends the power reading of the indicating meter from 0.1x to 1,000x scale value, or the db. reading from —10 to +30 db. in steps of 2 db.

TYPE OP-962

Characteristics similar to OP-961, except that it can measure up to 100 watts.

Impedance Range: 40 selected impedances between 2.5 and 20,000 ohms. Accuracy ±2% over frequency range 30 to 10,000 cycles.

Power Range: 0.1 mw to 100 watts in 0.1 mw steps. Range may be extended below 0.1 mw by use of external amplifier.

Indicating Meter: Calibrated from .01 watt to 1 watt and from —10 to +10 db. Zero level: 1mw.

Meter Multiplier: Extends range of meter from 0.01 to 100 times scale reading.

THE DAVEN CO.

191 CENTRAL AVENUE • NEWARK 4, NEW JERSEY

KEEP POSTED on Electron Tubes



with the most authoritative technical literature in the field

A **Tube Handbook—All Types HB-3** (7⅜" x 5") The "bible" of the industry—contains over 2500 pages of loose-leaf data and curves on all RCA receiving tubes, power tubes, cathode-ray tubes, phototubes, and special tubes. Three de luxe 4-prong binders imprinted in gold. Available on subscription basis. Price, $10.00 including service for first year. Write to Commercial Engineering for descriptive folder and order form.

B **Receiving Tube Manual—RC-16** (8¾" x 5½")—500 pages. New, completely up-to-date. Covers technical information on more than 160 RCA receiving tubes and kinescopes. Includes an expanded circuit section, enlarged section on resistance-coupled amplifiers, new data on cathode-follower design, and completely revised tube classification charts, including miniature types and their GT equivalents. Features lie-flat binding. Price, 50 cents.

C **Radiotron Designer's Handbook**—(9" x 6")—556 pages. Edited by F. Langford Smith of Amalgamated Wireless Valve Company Pty. Ltd. in Australia. Of value to anyone interested in fundamental principles of practical circuit design. Copiously illustrated. Price, $1.25.

D **Power and Gas Tubes for Radio and Industry**—Bulletin PG-101-A (11" x 8½")—20 pages. Contains basic data on more than 150 air-and-water-cooled transmitting tubes, rectifier tubes, thyratrons, ignitrons, and voltage regulators. Features brief descriptions, applications, terminal connection diagrams, and photos of representative types. Price, 15 cents.

E **Phototubes, Cathode-Ray and Special Types**—Bulletin CRPS-102A (11" x 8½")—20 pages. Contains basic data on more than 145 single-unit, twin-unit, and multiplier phototubes, cathode-ray tubes, camera tubes, monoscopes and types for special applications. Includes brief descriptions, applications, terminal connections, and photos of many types. Spectral response curves are given for all phototubes. Price, 15 cents.

F **Receiving Tubes for AM, FM, and Television Broadcast**—Bulletin 1275-E—24 pages. Completely revised and brought up to date. Contains characteristics on more than 450 RCA receiving tubes including kinescopes and a classification chart which lists all types according to function, and group types having similar characteristics and same cathode voltage. Socket connection diagrams arranged for quick and easy reference. Price, 10 cents.

G **Instruction Booklets**—Complete authorized information on individual RCA transmitting tubes and other tubes for communications and industry. Be sure to mention tube-type booklet desired. Single copy on any type free on request.

Use this convenient coupon for obtaining the RCA tube literature you need.

RCA, Commercial Engineering
Section K42R, Harrison, N. J.
Send me the RCA publications checked below. I am enclosing $..... to cover cost of the books for which there is a charge.

Name _____

Address _____

City _____ Zone _____ State _____

- ☐ HB-3 Tube Handbook ($10)* (A)
- ☐ RC-16 Receiving Tube Manual (50 cents) (B)
- ☐ Radiotron Designer's Handbook ($1.25)* (C)
- ☐ Power and Gas Tubes for Radio and Industry (15 cents) (D)
- ☐ Phototubes, Cathode-Ray and Special Types (15 cents) (E)
- ☐ Receiving Tubes for AM, FM, and TV (10 cents) (F)
- ☐ Instruction Booklet on tube types ..... (Free) (G)

*Prices apply to U.S. and possessions only.

RADIO CORPORATION of AMERICA
ELECTRON TUBES HARRISON, N. J.